


a


PROFILES
1 LAYER PER 1

Laser cut only

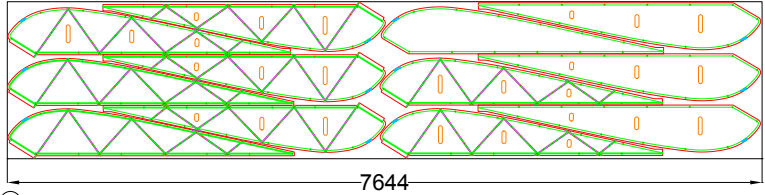


b

TOP BOTTOM CELLS & PROFILES
1 LAYER PER 1

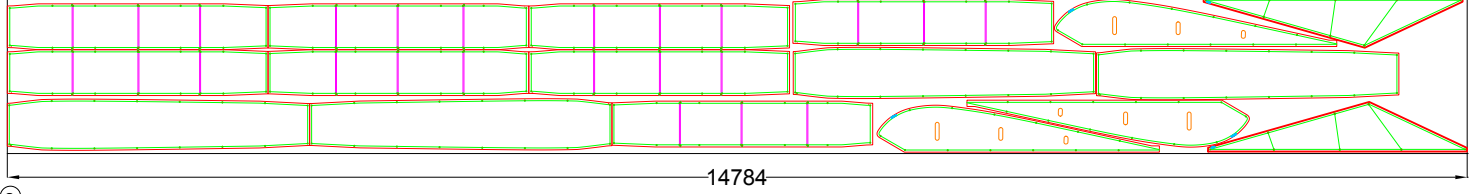


c

TOP & BOTTOM CELLS
1 LAYER PER 1

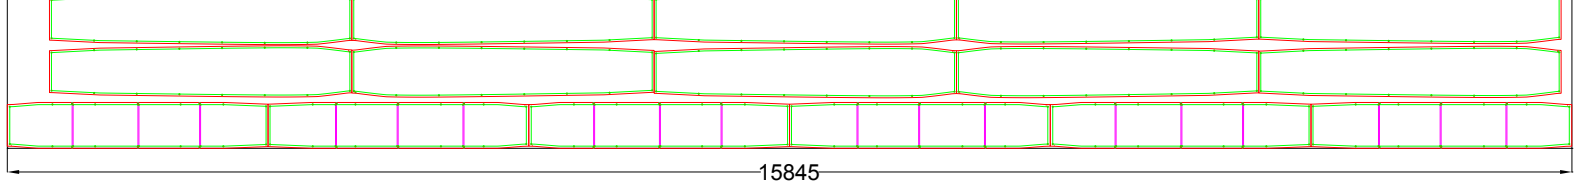

Consumption	Ref. No	To be prepared for Marker	m
F1,11(1.6m)	a	1 x 07.67	07.67
F1,11(1.6m)	b	1 X 14.81	14.81
F1,11(1.6m)	c	1 x 15.85	15.85
Total			38.33
BOTTOM LEADING EDGE			=
25mm			
TOP LEADING EDGE BINDING TAPE =12.5mm			
20mm			
BOTTOM EDGE REINFORCEMENT 12.5mm TAPE			
NO Laminated Reinforcement on A			

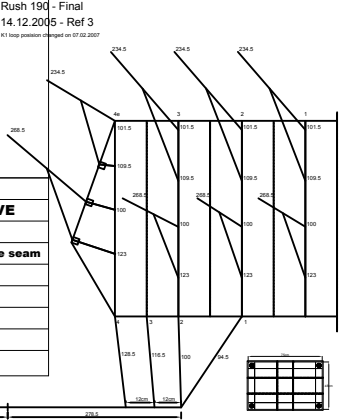

* C, D Line Points Moved 13.1425 mm according to MD's Instruction on 15-10-2003
* 9.5 tape changed on Profiles for A and add the material to leading edge open for out side seam(Date of Last modified - 13.12.2004)

Customer	Performance Variable
Product	RUSH 190 NEW RESERVE
Mini.Qty	1
Version	113 SCALED -1.2982 Out Side seam
Based on File	Q 113
Sheet made by	Shiran
Checked by	
Approved by	
Date	23.08.2003