

**Fasteners Soft Goods Hot Cutters** 

www.lowyusa.com info@lowyusa.com



who

Embarking on our 40th anniversary, LOWY has been supporting companies like yours with Webbing, Fasteners, and Soft Goods to help you make the products you want to make, when you need to make them.



Our mission, like it was in 1970, is providing you with the **best products** quickly with helpful, knowledgeable, and friendly **service**. We work very hard to have the components you want and the answers to your questions all with a **smile**. We don't think a friendly voice is too much to ask for from a vendor, as well as **quick turnaround** on your order.

Our combination of service and selection of Webbing, Fasteners, and Soft Goods makes LOWY a unique source in today's market-place. And it's still why customers keep coming back.

Our **WEBBINGS** are of the finest quality nylon, polypropylene, polyester, and cotton. Our FASTENERS range from heavy to light duty for applications as widespread as safety harnesses, seat belts, cargo tie-downs, dog leashes, rifle slings, tactical gear, and backpacks. And we have **SOFT GOOD** items – Velcro® hook & loop, thread, cord, elastic, zipper, mesh, and bungee shock cord – that can perfect a product, and save you time from further sourcing. We also carry a full line of **HOT CUTTING** devices to speed up your production while improving the finished product. Of course, many of our products meet or exceed military specification and are Berry Amendment compliant because your products require it.

And given the ongoing need to meet the military's changing world, we proudly carry many items in **common military colors of Olive Drab, Coyote Tan and Foliage Green**. Webbing, plastic fasteners, Velcro®, thread, zipper, mesh, elastic, and bungee cord are stocked in a range of colors to **meet your military customer's requirements**. This range of items continues to grow and develop based on our customers' needs.

call fax

We want you to be able to make the **right decision** for your products and hopefully this new catalog will help you. Most items are pictured at or near actual size and color. If you don't see something, let us help – **we can find almost anything**. We also specialize in **proprietary products** if you need something special and just for you.

Call us **310-763-1111**, fax us **310-763-1112**, e-mail us **info@lowyusa.com**, stop by the office, drop by our booth at a trade show.

Welcome to LOWY.

## **INSIDE LOWY**

WEBBING		PLASTIC FASTENERS	
Nylon – Flat	4	Side Releases	80
Nylon – Tubular	13	Cam Buckles	83
Polypropylene	14	Slides	84
Cotton	18	Loops	85
Seat Belt	19	Double Bar Buckles	86
		D-Rings	87
RESTRAINT HARDWARE		Tri-Loops, Belt Keepers, Web Dominator	88
End Fittings	20	Snap Hooks	89
Roller Adjusters	22	Cord Locks, Zipper Pulls, Locking Dees	
Latch & Links	23	Shoulder Pads	91
Shoulder Links	25		
5-Point Cam Buckle	26	SOFT GOODS	
Seat Belt Buckles	27	Parachutes (Surplus), Custom Sewing	92
Adapters	29	Velcro® Hook & Loop, 3M Dual Lock	93
V-Rings	31	Zipper	94
D-Rings	32	Mesh	95
Snap Hooks	33	Thread	96
Quick Release Buckles	34	Elastic	97
		Bungee Shock Cord	98
FASTENERS		Grommets	99
Snap Hooks	35	· ·	100
Spring Links	47	Hot Cutters and Hole Punches	103
Quick Links	49		
Carabiners	50		111
Cargo Hooks	52		112
Cargo Restraint	54	FAX Order Form	113
Surplus Parachute Hardware	56		
D-Rings	58		
O-Rings	60		
Key Rings, Triangles	63		
Footman Loops, Loops, Clip & D-Rings	64		
Swivel Loops, Squares, Harness Loops	65		
Slides	66		
Clasps, Slide Adjusters	67		
Cam Buckles	68		
Ratchets	70		
Web Clamps	73		
Web Buckles	74		
Pet Buckles	75		
Metal Side Releases	76		
Tent Hardware, E-Z Clip	77		
Belt, Bag, Holster Hardware	78		
Military Pistol Belt & Bag Hardware	79		



# Webbing Webbing Webbing

**Textured Nylon** Nylon **Tiedown** Scuba

Polypropylene Binding Tapes Reflective Seat Belt

Cotton **Tubulars** Pistol Belt **Backpack** 

- All webbing is sold in full rolls.
- · All Webbing is priced per yard.
- · Certifications of Conformance when applicable are available upon request for: **Breaking Strength** Mil-Spec **Barry Amendment Compliancy** Origin
- Many other colors beyond those listed may be available.
- · Colors displayed may not reflect actual color of webbing.
- · Non-Stock/Specia; Order items may require minimums and deposit.
- · Sample Swatches are available on all items



#### BREAKING STRENGTHS

Commercial items: Average Breaking Strengths listed. Mil-Spec items: Minimum Breaking Strengths listed.

MIL-SPEC WEBBING CLASS DEFINITIONS

#### MIL-SPEC WEBBING TREATMENT INFORMATION

Condition "R": Resin Impregnation to protect against abrasion. Certifies to Mil-W-27265. Condition "U": Non-Resin Impregnated.

#### WIDTH TOLERANCES

For webbing 1" or narrower: +/- 1/32" For webbing 1" or wider: +/- 1/16"



### 3/8" - 5/8" - 3/4" NYLON WEBBINGS



#### Style No. WBN3/038

Width: Material: Nylon Thickness: .065" Breaking Strength: 1,200 lbs. Weave: plain, soft, loose Spool Size: 200-400 yards

Colors: black, bright red, forest green,

purple, royal blue, red Common uses: pet colors and leashes

#### Style No. WBN4/058

Width: 5/8" Nylon Material: Thickness: .040" 800 lbs. Breaking Strength: thin, loose Weave: Roll Size: 100 yards Colors: black

Common uses: heavy trim or light webbing



#### Style No. WBN3/058

Width: 5/8" Nylon Material: Thickness: .065 Breaking Strength: 1,900 lbs. Weave: plain, soft, loose Roll Size: 50 yards

black, bright red, forest green, Colors:


purple, royal blue, red Common uses: pet colors and leashes

#### Style No. WBN6/034

Width: 3/4" Nylon Material: Thickness: .045" Breaking Strength: 750 lbs Commercial Grade of: Mil-W-17337 tight, coarse 100 yards Weave: Roll Size: Colors: black

Common uses: lashing strap especially with

plastic hardware "backpack"

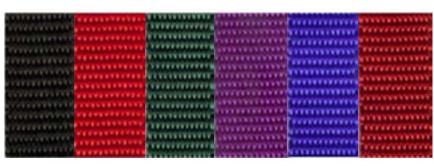


Style No. WBN3/034 Width: 3/4" 3/4" Nylon Material: Thickness: .065" 2,700 lbs. Breaking Strength: plain, soft, loose Weave: Roll Size: 50 yards Colors: black, bright red, forest green, purple,

royal blue, red, Common uses: pet colors and

leashes, straps, lashings



### - 1 1/4" - 1 1/2" NYLON WEBBINGS

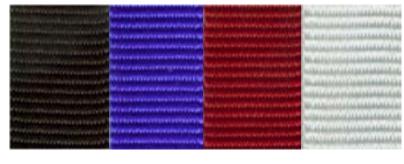

### Style No. WB18

Material: Nylon Thickness: .085" Breaking Strength: 5,600 lbs. Weave: plain, loose Roll Size:

Colors: black, royal blue, red, white

equine leads, tiedowns. handles, straps



#### Style No. WBN3/114

Width: Material: Nylon Thickness: .065" Breaking Strength: 4,500 lbs. Weave: plain, loose Roll Size: 50 yards

black, olive drab, coyote Colors: Common uses: rifle slings, belts, straps



#### Style No. WBN3/112

Width: Material: Thickness: 1 1/2" Nylon .065 Breaking Strength: 5,600 lbs. plain, loose 50 yards Weave: Roll Size: black, bright red, Colors: royal blue

pet collars & leashes, Common uses: tiedowns, belts,

harnesses, straps, cargo nets



#### Style No. WBN6/112

Width: 1 1/2" Material: Nylon Thickness: .045" Breaking Strength: 1,800 lbs. Certifies to: Mil-W-17337 except Black.

Berry Amendment Compliant thin


Weave:

tight coarse 100 yards Roll Size: Colors: black (comm.) olive drab

coyote foliage green

Common uses:


Lashing strap with plastic hardware. "Backpack" webbing.



Material: Nylon Thickness: Breaking Strength: 2,000 lbs. Weave: stiff, coarse Roll Size: 50 yards Colors:

Common uses: belts, scuba straps



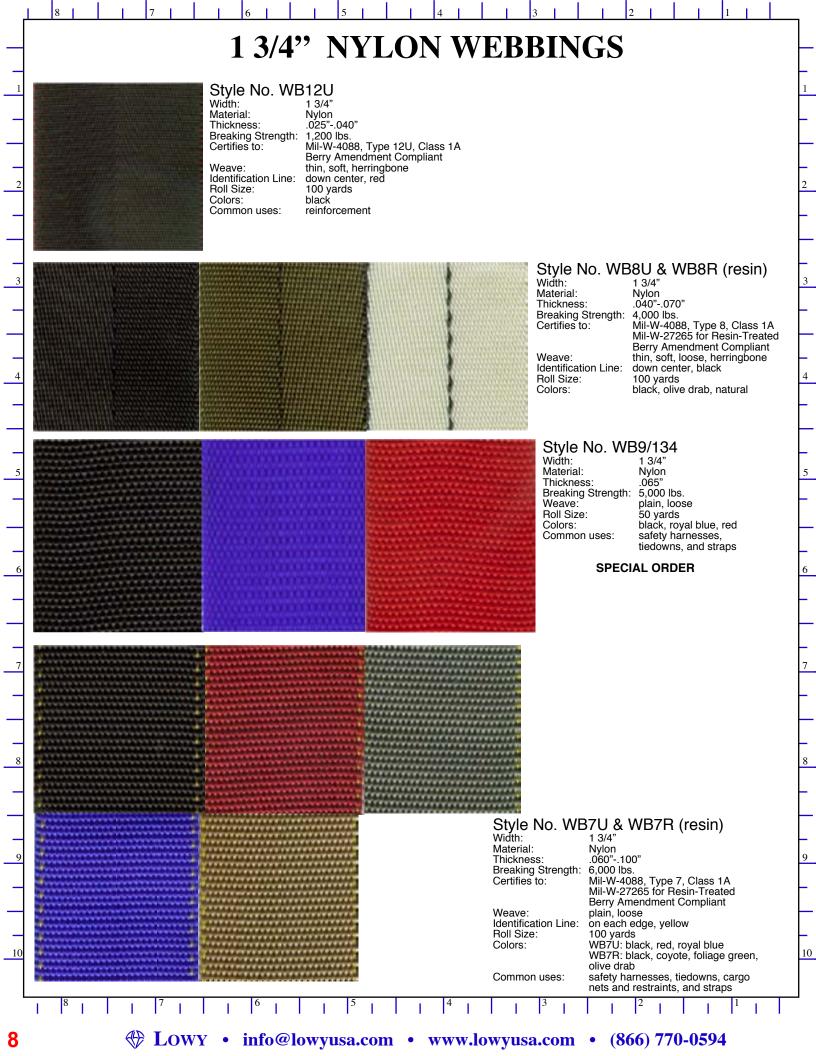










### TUBULAR WEBBINGS



distilling

41 minutes

4114444

чиши

4 Hillian P

dilimme?

HIII

Material: Thickness: Polyester 065 tubular, plain Weave: Roll Size: 200 yards Colors: white Common uses:

handles, draw straps, and general use straps.

### Style No. WBTUB – Mil-Spec Tubular

Widths: Material: Nylon Thickness: .120" Breaking Strength: 2,300 lbs Certifies to: Mil-W-562 Mil-W-5625

Berry Amendment Compliant tubular, plain Weave:

Identification Line: down center, black Roll Size: 200 yards

Colors: white

Standard Mil-Spec shuttle-loom Common uses: tubular webbing used on pet products, parachutes, harnesses, handles,

and general use straps.



#### Style No. WBTUB - Mil-Spec Tubular

Widths: Material: Nylon Thickness: .120" Breaking Strength:

4,000 lbs Mil-W-5625, Class 1a Certifies to: Berry Amendment Compliant


tubular, plain down center, black Weave: Identification Line: Roll Size:

Colors:

100 yards
black, white, olive drab, coyote,
red, royal blue, foliage green, yellow
Standard Mil-Spec shuttle-loom tubular
webbing used on pet products, parachutes,
barnesses handles and general use straps Common uses: harnesses, handles, and general use straps.



9/16"

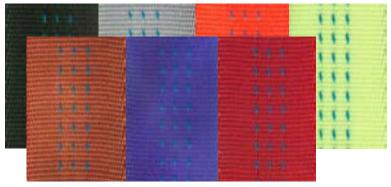

### Style No. WBTUBB - "Climb-Spec" Tubular

Widths: Material: 9/16", 1", 2" Nylon

Climb-Spec Tubular is not regularly Thickness: 080" 9/16" – 2,300 lbs 1" – 4,000 lbs 2" – 6,800 lbs Breaking Strength: stocked. Please allow 1-2 weeks

approximately.

Weave: tubular, fine, soft

ID Line & Roll Size: 9/16", two lines down center – 100 yards 1", three lines down center – 100 yards 2", six lines down center – 50 yards


Colors: various

Popular in sport climbing industry due to web's Common uses:

resistance to abrasion and higher strength as

well as a soft feel.


Pet supplies, handles, & general use straps.









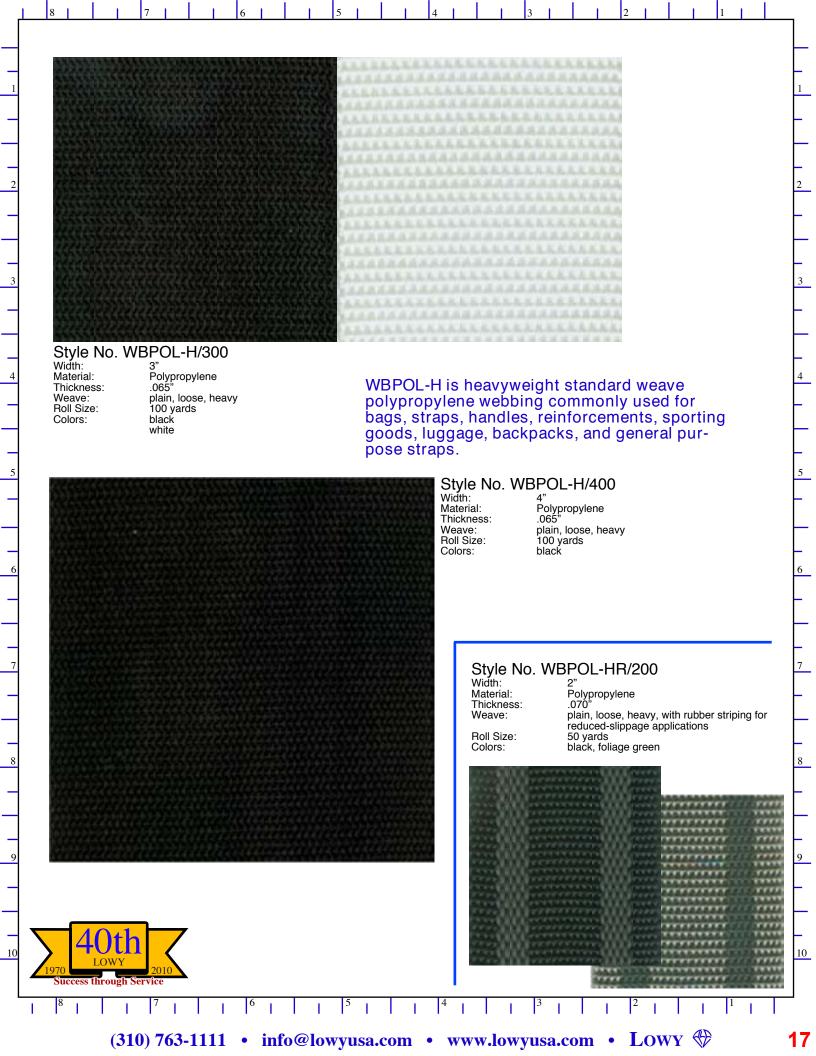



### SEAT BELT WEBBINGS



#### Style No. WBSBT/2-M

Width: Material: Nylon .055"-.075" Thickness: Breaking Strength: Certifies to: 5,500 lbs.

Mil-W-4088, Type 24, Class 1A Berry Amendment Compliant

Weave: seat belt, 4 panel

Roll Size: 100 yards Colors: black olive drab



#### Style No. WBSBT/2-3

Width: Material: Nylon .055"-.075" Thickness: seat belt Weave: 3 panel Roll Size: 100 yards Colors: red royal blue



#### Style No. WBSBT/2-POLY

Width: 1 15/16" Material: Polyester
Thickness: .055"-.075"
Breaking Strength: 6,000 lbs. seat belt, 5 panel Weave:

Roll Size: 200 yards Colors: black



### Style No. WBSBT/2-4 Width: 2"

Material: Nylon .055"-.075" Thickness: Weave: seat belt, 4 panel Roll Size: 100 yards purple
SPECIAL ORDER Colors:

Standard Seat Belt Webbing is used on automotive and aircraft seat belts, as well as safety harnesses, bag straps, tie-downs. Most goods stocked are commercial except where noted.



Style No. WBSBT-S/200 Width: 1 7/8" - 2" Material: Polyester Seconds .055"-.075" Thickness: Weave: seat belt panels vary 200 yards Roll Size: Colors: burgundy gray turquoise navy blue orange

WBSBT-S is second quality polyester seat belt webbing. Webbing can be called "seconds" for various reasons including color and thread imperfections, and great-

er than normal splits per roll. · Seconds cannot be certified for strength.

Roll sizes may vary.Availability of cannot be guaranteed.



#### Style No. WBCSBT/112 Width:

1 1/2" Material: Nylon
Thickness: .035"-.050"
Breaking Strength: 2,500 lbs.
Weave: "child's" seat belt 5 panel

Roll Size: 150 yards Colors: black

10

### **END FITTINGS**



AL1138 Snap-In End Fitting 2" x 3/16" slot, 3/8" anchor point alloy steel, zinc plated 3,000 lb



AL126 Bolt-In End Fitting 1/2" slot, 3/8" hole, 45° bend steel, nickel plated 1,000 lb



SN10025 1" slot alloy steel, nickel plated 1,000 lb



AL19 **Bolt-In End Fitting** 1" x 1/2" slot, 1/2" hole alloy steel, yellow chromate plated 3,000 lb



Bolt-In End Fitting 1" x 1/2" slot, 1/2" hole 45° bend alloy steel, yellow chromate plated 3,000 lb



3,000 lb


10

NEW PART

AL65-B Bolt-In End Fitting 1 3/4" x 1/4" slot with web shield 1/2" hole 30° bend alloy steel, zinc plated 5,000 lb



AL65 Bolt-In End Fitting
1 3/4" x 1/4" slot with web shield,
1/2" hole alloy steel, zinc plated 10,000 lb

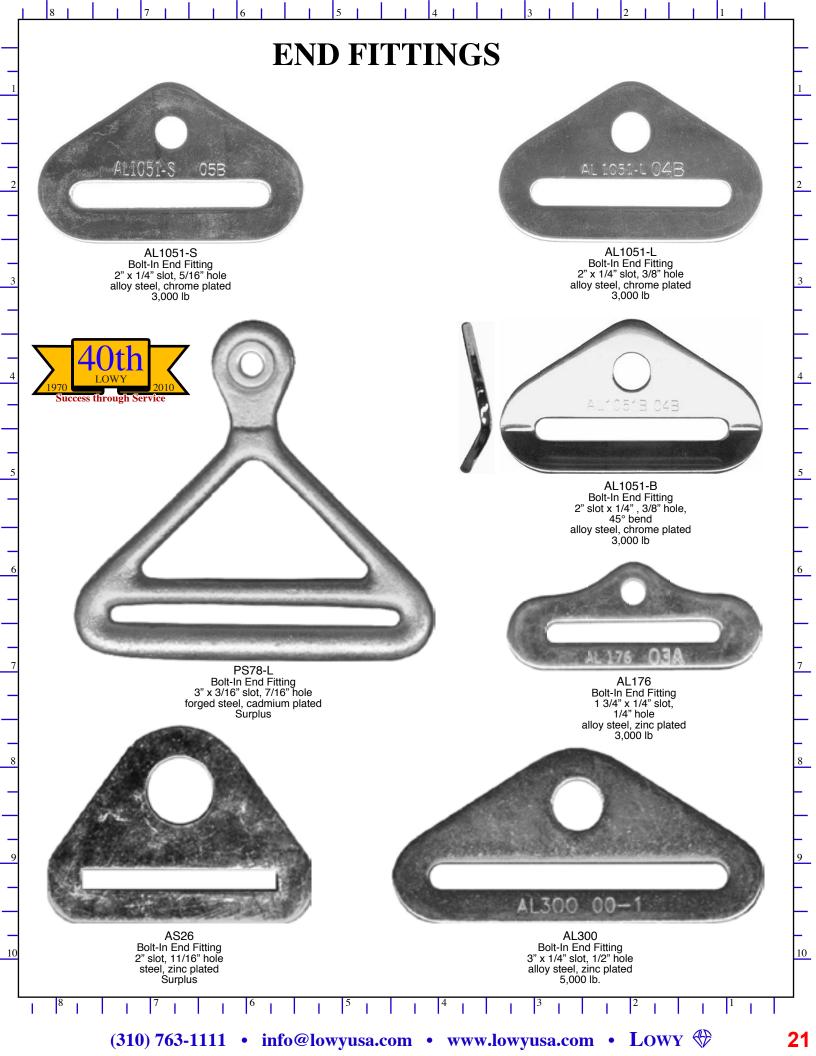

### **ROLLER ADJUSTERS**

#### ALSO AVAILABLE:

AL13-EZ Roller Adjuster without spring 1 3/4" slot alloy steel, zinc plated 2,500 lb

RH13 Roller Adjuster 1 3/4" slot steel, cadmium 2,000 lb, proof load PS22007

**SPECIAL ORDER** 




AL13-S Roller Adjuster
with Spring Tensioner
1 3/4" slot
alloy steel, zinc plated 2,500 lb



AL14-S Roller Adjuster with Spring Tensioner 2" slot alloy steel, chrome plated 3,000 lb





RH71 Adjuster 3" slot forged aluminum, annodized 5,000 lb SPECIAL ORDER also available in 1 3/4"






RH73 Spring Loaded Adjuster 3" slot steel, zinc plated 3,000 lb SPECIAL ORDER

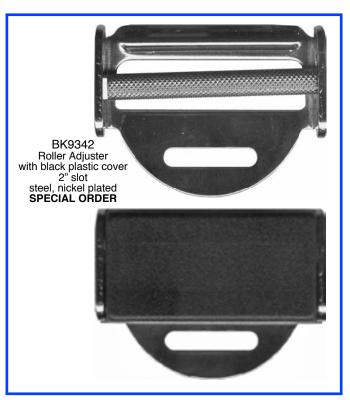

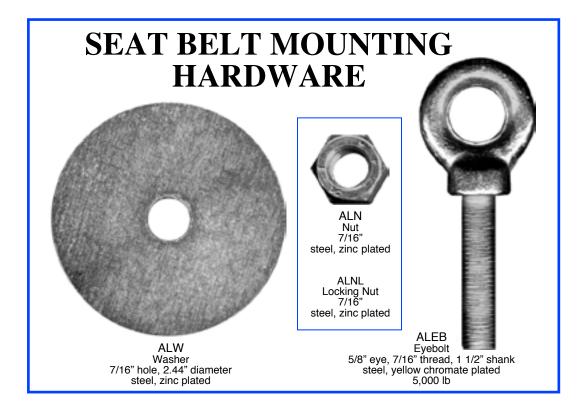



### **LATCH & LINKS**

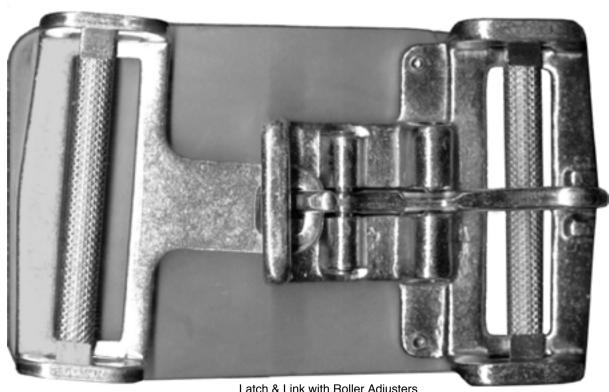


Latch & Link with Roller Adjusters with leather pad RH7116 3" forged steel, zinc plated 3,000 lb



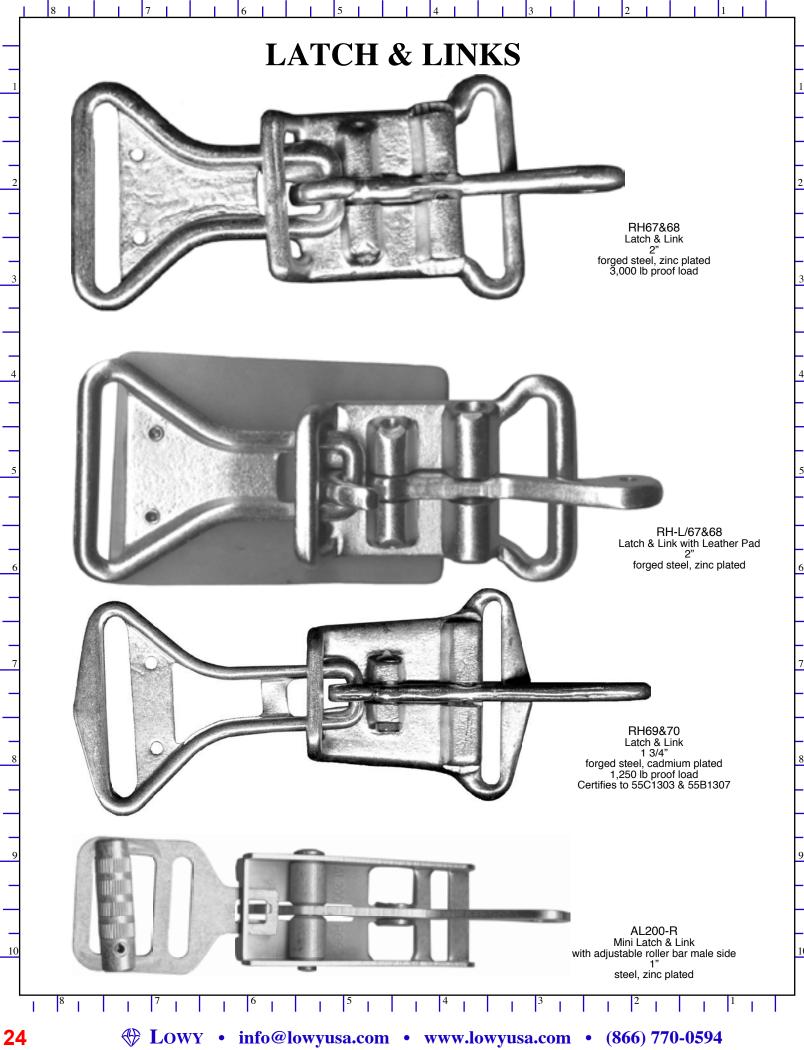

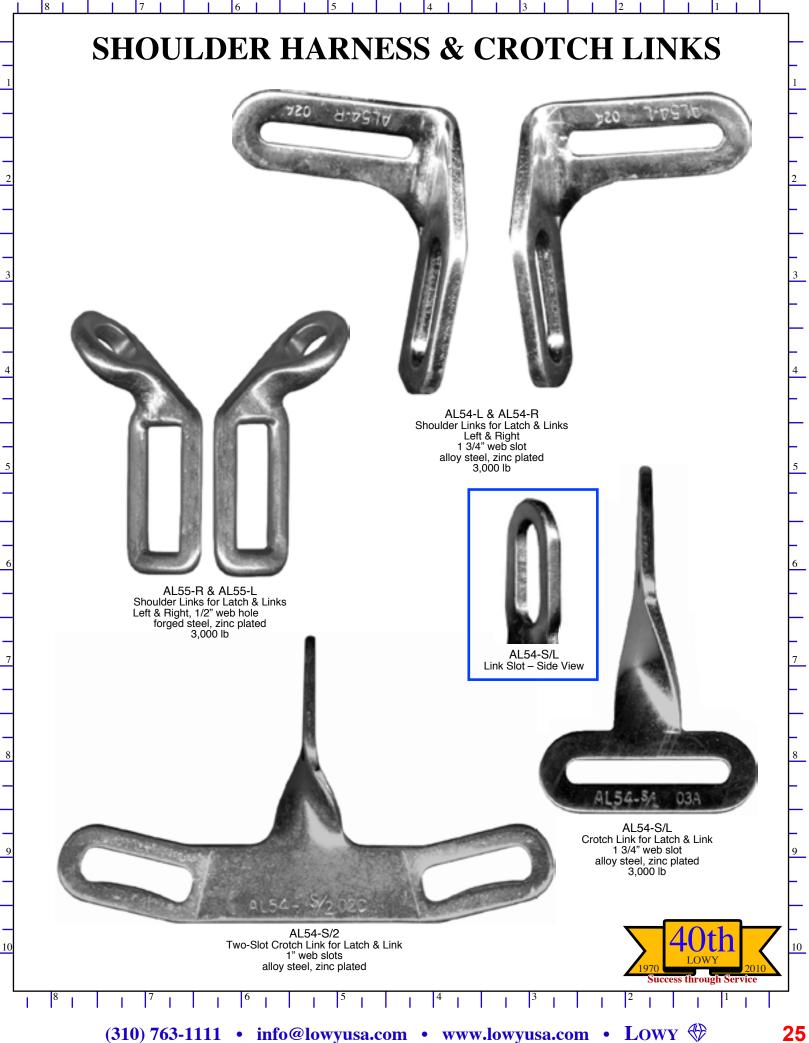

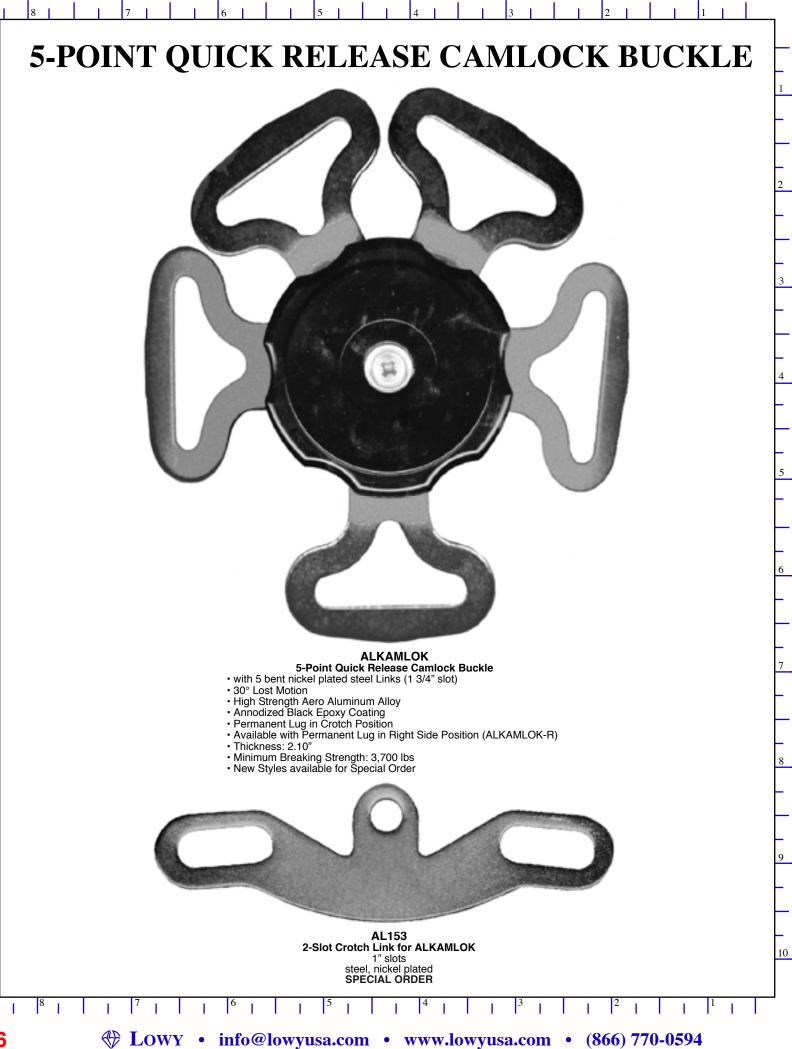

### LIFT STYLE SEAT BELT BUCKLES

RH54SET
Left & Right Shoulder Harness Links
for use with AM-SAFE style Seat Belt Buckle with Long Tongue
1" web slot
steel, chrome

#### **SPECIAL ORDER**




RH54-S Crotch Strap Link for use with AM-SAFE style Seat Belt Buckle with Long Tongue 1" web slot steel, chrome

#### **SPECIAL ORDER**



RH300800 Lift Style Seat Belt Buckle & Keeper 2" with knurled adjuster in buckle steel, chrome Meets FMVSS 209

Also available as **SPECIAL ORDER**: in Stainless Steel material or 3" size




Note: Thumbnails reduced 50% in size

RH21
Lift Style Seat Belt Buckle
2"
steel body, aluminum top
spring-loaded
DOES NOT REQUIRE TONGUE

SPECIAL ORDER





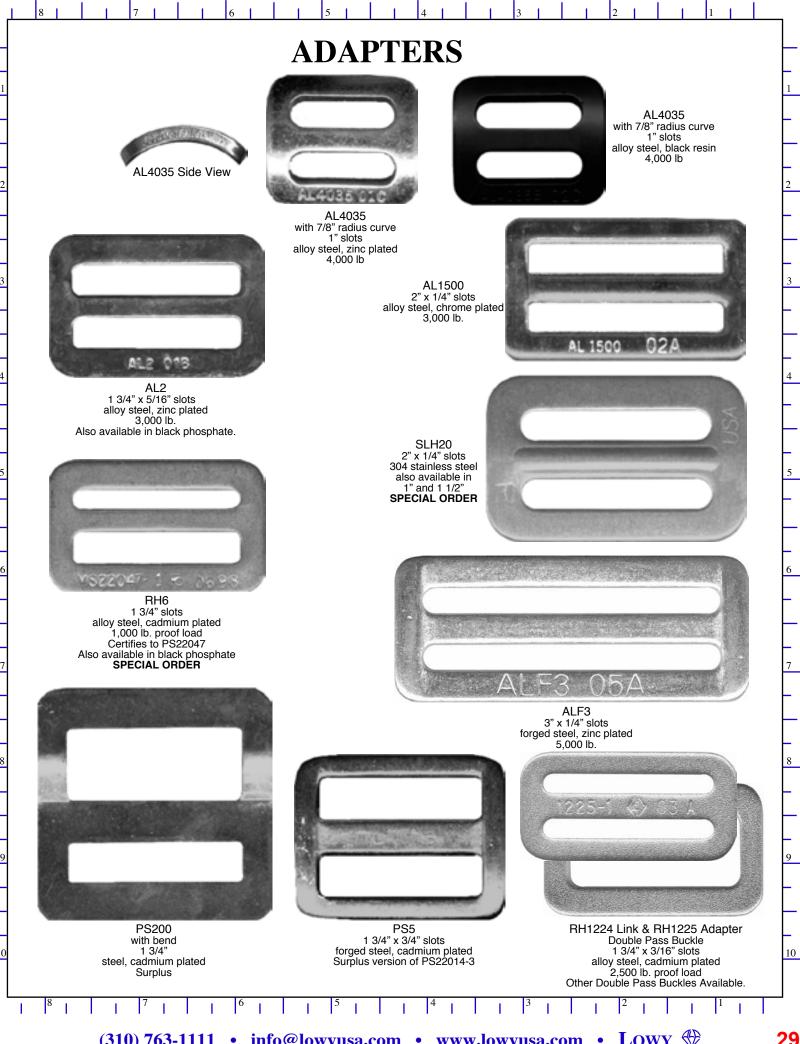




### **ADAPTERS**




AL101-BLK channel adjuster bar steel, black plated 1,000 lb. SPECIAL ORDER




AL101 channel adjuster bar steel, zinc plated 1,000 lb.




RH11 channel adjuster bar 1 3/4" steel, cadmium plated Certifies to PS70101 500 lb. proof load



AL9-BLK knurled adjuster bar 1 3/4" x 1" forged steel, black phosphate plated 5,000 lb Commercial version of PS22040



RH8 channel adjuster bar
1 3/4" x 3/4"
forged steel, cadmium plated
2,500 lb proof load
Certifies to PS22019
SPECIAL ORDER



RH10 knurled adjuster bar 1 3/4" x 3/4" forged steel, cadmium plated 2,500 lb proof load PS70114



AL9 knurled adjuster bar 1 3/4" x 1" forged steel, zinc plated 5,000 lb Commercial version of PS22040

Use RH9 for certified PS22040 version.



AD100 sliding adjuster bar 1 1/2" steel Available platings: zinc, black, rust, green/gray 4,000 lb.

SPECIAL ORDER





AD100 sliding adjuster bar 1 3/4" steel Available platings: zinc, black, rust, green/gray 4,000 lb.

SPECIAL ORDER

10

## **V-RINGS**



RH44/112-BLK 1 1/2" x 1/4" slot steel, black plated 4,000 lb. SPECIAL ORDER



AL45/100-ZINC 1" x 3/8" slot forged steel, zinc plated 4,000 lb.



AL45/100-BLK 1" x 3/8" slot forged steel, zinc plated 4,000 lb.




RH45 1 3/4" x 3/8" slot forged steel, cadmium plated 2,500 lb. proof load Certifies to PS22045



RH44 1 3/4" x 1/4" Slot forged steel, cadmium plated 2,500 lb. proof load Certifies to PS22020 SPECIAL ORDER



AL44-BLK 1 3/4" x 1/4" Slot forged steel, black phosphate plated 4,000 lb. Commercial version of PS22020



RH20 Adjustable with Tension Spring 1 3/4" slot forged steel, cadmium plated 2,500 lb. proof load Certifies to PS27765 SPECIAL ORDER



**RH17** Adjustable "Reversible Quick Fit" 1 3/4" slot forged steel, cadmium plated 2,500 lb. proof load Certifies to PS70113 SPECIAL ORDER




RH18 "Quick Fit Adjuster" 1 3/4" slot forged steel, cadmium plated 2,500 lb. proof load Certifies to PS27765

### **D-RINGS, O-RINGS, LINKS**



**RH39** Accessory D-Ring 1 3/4" forged steel, cadmium plated 1,000 lb. proof load Certifies to PS70123 SPECIAL ORDER



RH47-C Link
1 3/4" x 5/8" slot
round forged steel, zinc plated
3,000 lb. proof load
Certifies to PS70108-1
SPECIAL ORDER



RH7111 Link 1 3/4" x 15/16" flat forged steel, zinc plated 4,000 lb.



RH27 Slotted D-Ring 1 3/4" x 3/8" slot forged steel, cadmium plated 5,000 lb proof load Certifies to PS22046



PS28-BLK Slotted D-Ring
with holes in cross bar
1 3/4" x 3/8" slot
forged steel, black phosphate plated
Non-certified, surplus version
of PS22046-3



PS28 Slotted D-Ring with holes in cross bar 1 3/4" x 3/8" slot forged steel, cadmium plated Non-certified, surplus version of PS22046-3







### **SNAP HOOKS**



RH98 1 3/4" slot forged steel, cadmium plated 2,500 lb. proof load Certifies to 48B7884 SPECIAL ORDER



RH101 Harness Ejector Snap 1 3/4" slot forged steel, cadmium plated Certifies to PS22017 SPECIAL ORDER



RH102
Quick Fit Ejector Adjuster
1 3/4" slot
forged steel, cadmium plated
Certifies to PS22018
SPECIAL ORDER



RH103 Quick Connector Snap 1 3/4" slot forged steel, cadmium plated 2,500 lb. proof load Certifies to PS22042-1 **SPECIAL ORDER** 



PS96 1 3/4" slot forged steel, cadmium plated Surplus, non-certified version of PS70121

Use RH96 for certified PS70121 SPECIAL ORDER



PS105 Harness Adjuster Snap 1 3/4" slot forged steel, cadmium plated Surplus, non-certified version of PS22044

Use RH105 for certified PS22044 SPECIAL ORDER



### **ROUND EYE SWIVEL BOLT SNAP HOOKS**



SN709-R 3/8" zinc die cast, nickel plated 2" length



SN76 1/2" zinc die cast, nickel plated 3" length



SN225 1/2" zinc die cast, nickel plated 3 1/4" length



SN77 5/8" zinc die cast, nickel plated 3 1/2" length




SN78 3/4" zinc die cast, nickel plated 3 1/2" length




zinc die cast, nickel plated 3 3/4" length



SN80 1 1/4" zinc die cast, nickel plated 4 1/4" length

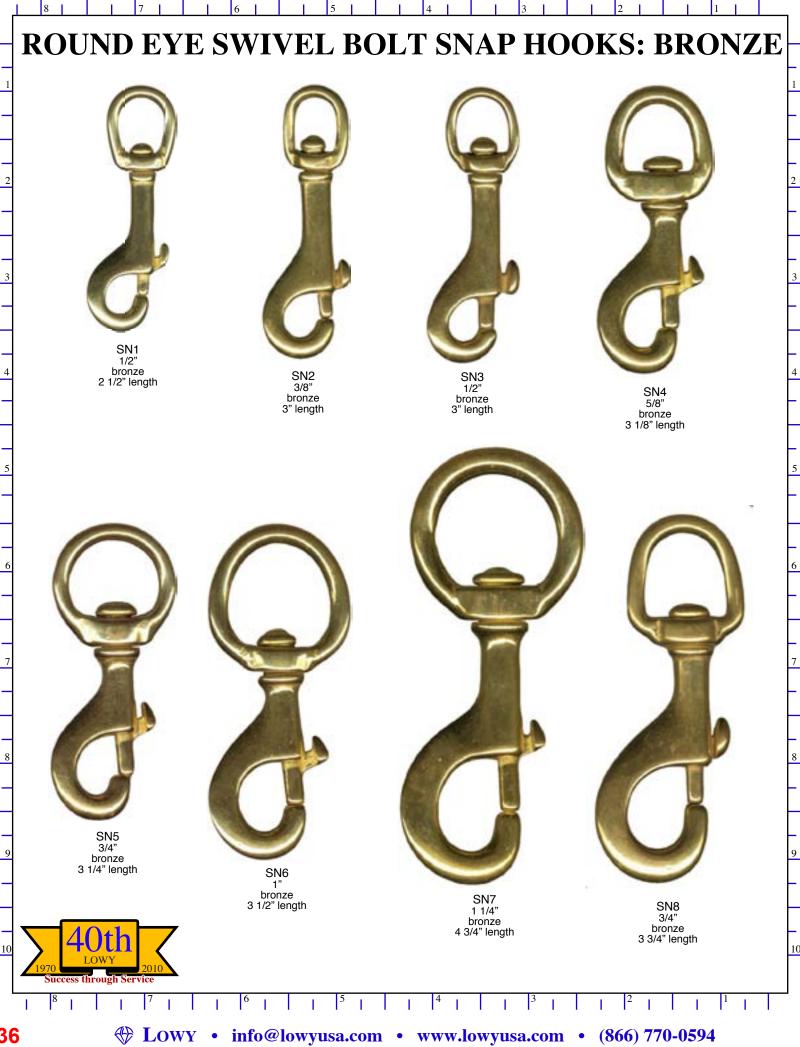

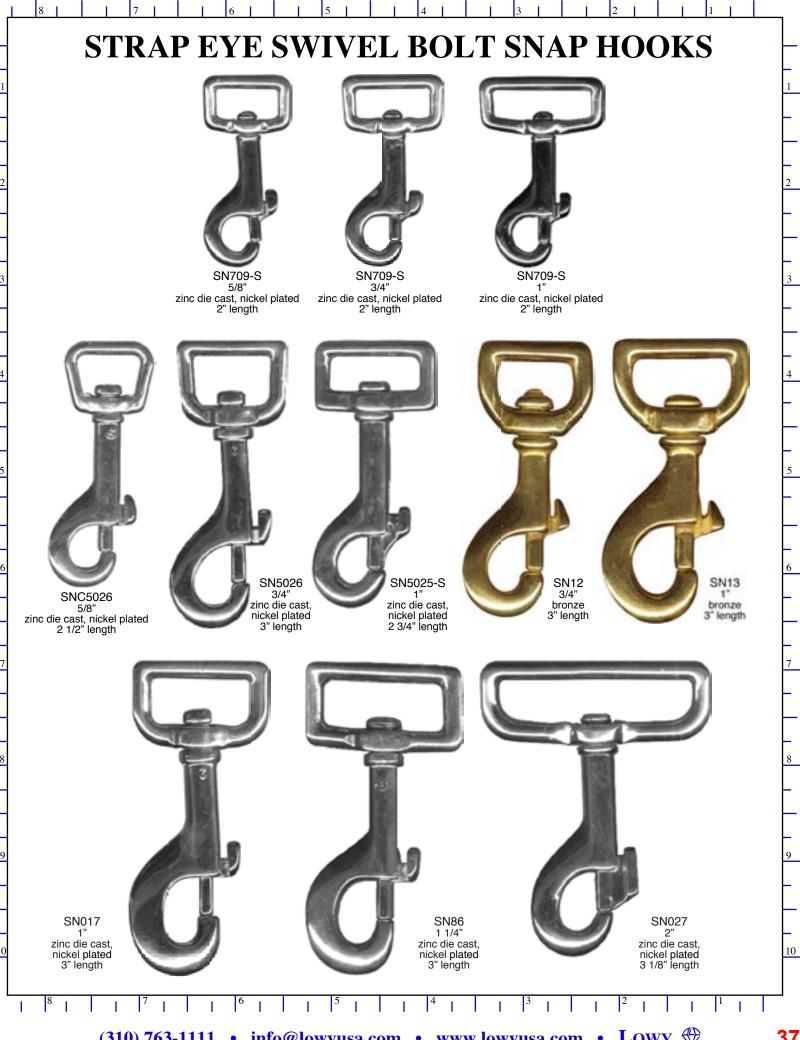





# **ROUND & STRAP EYE SWIVEL SPRING SNAPS**



SN830-R 5/8" zinc die cast, nickel plated 3 3/8" length



SN830-R 3/4" zinc die cast nickel plated 3 5/8" length



zinc die cast, nickel plated 2 3/16" length



SN710-S 1 1/2" zinc die cast, nickel plated 2 3/16" length








zinc die cast, nickel plated 3 1/8" length



SN848-S 1 1/2" zinc die cast, nickel plated 3 1/8" length




SN848-S zinc die cast, nickel plated 3 1/8" length

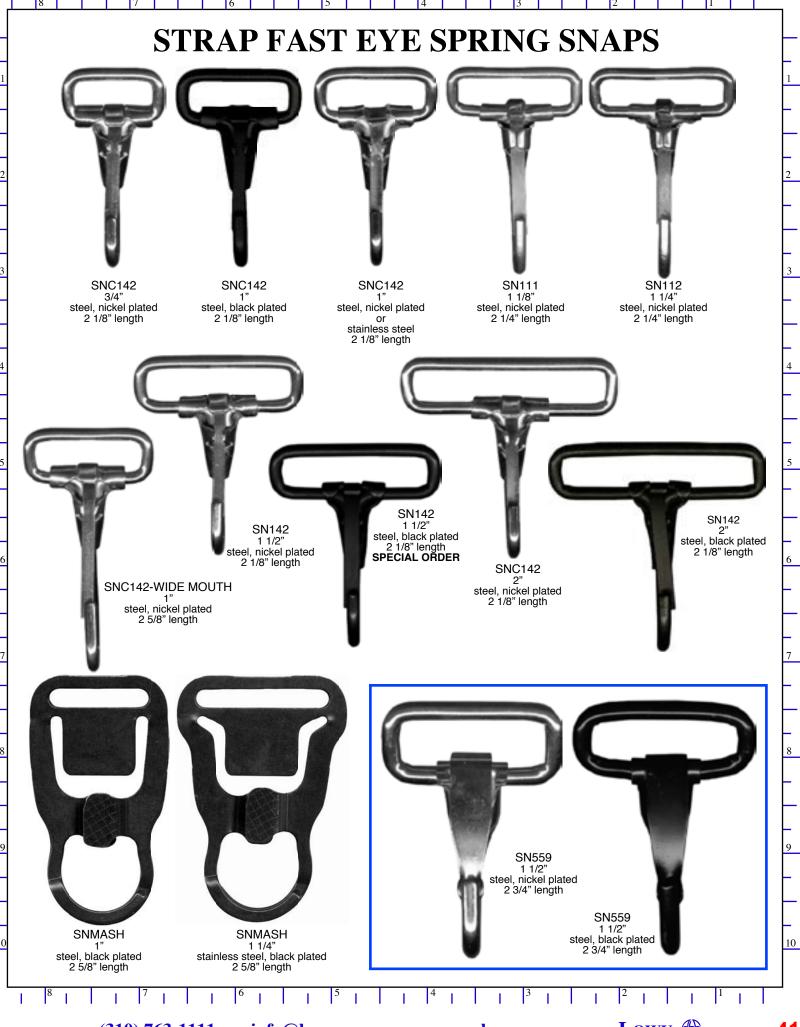









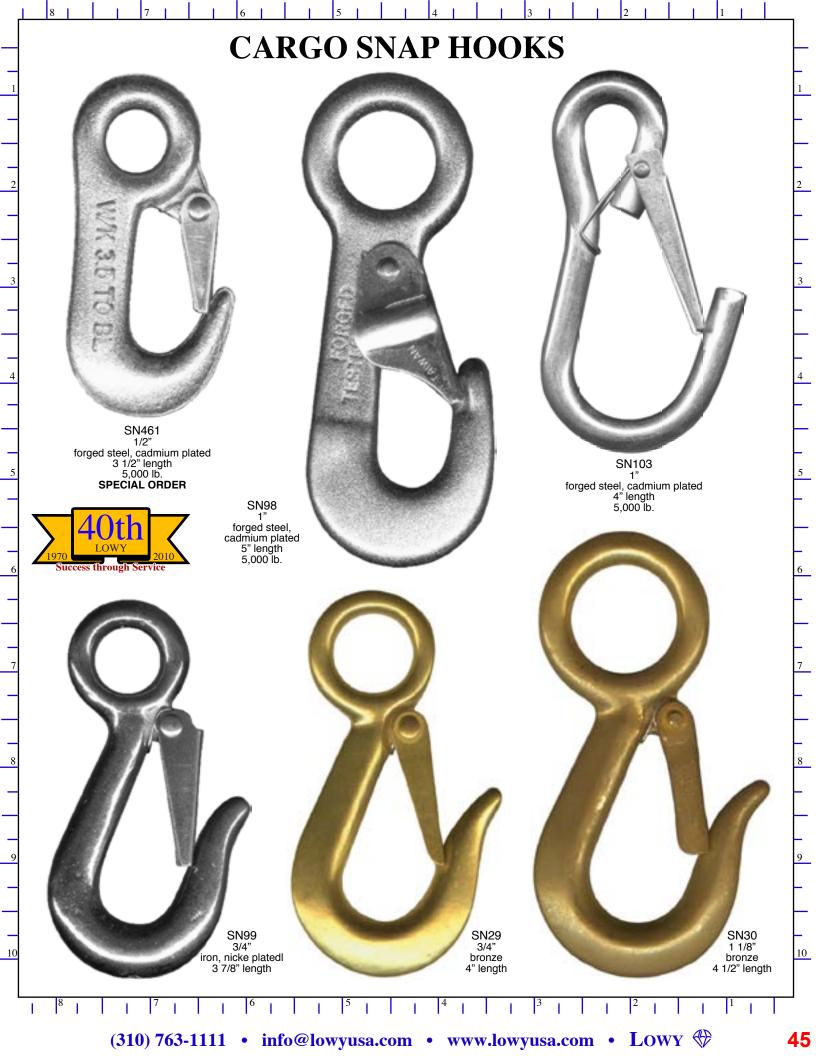

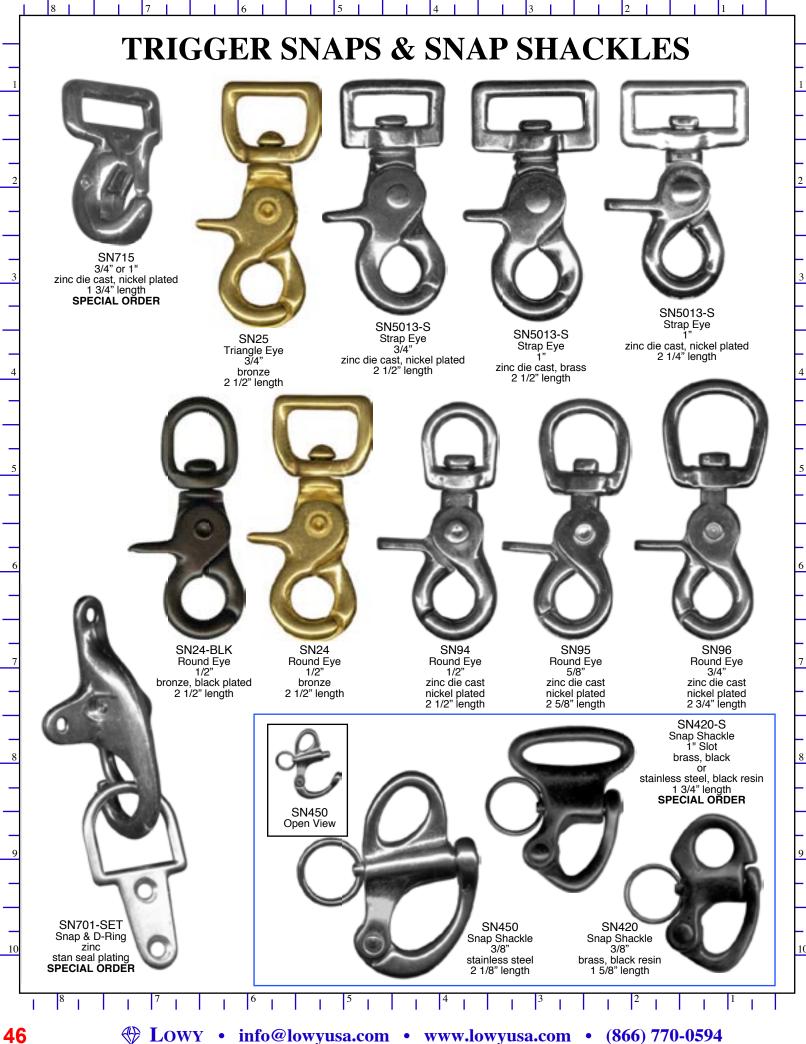

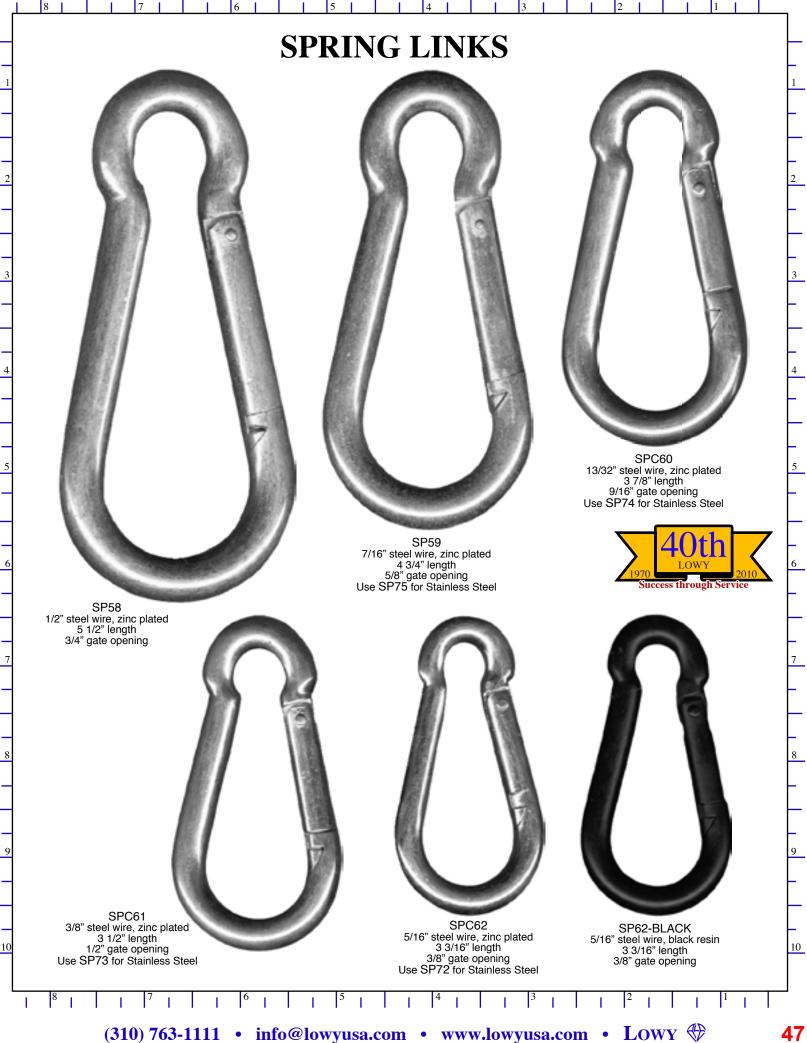

#### **SPRING LINKS**



SPC63 1/4" steel wire, zinc plated 2 3/8" length 5/16" gate opening

Use SP71 for Stainless Steel



SP64 3/16" steel wire, zinc plated 2 3/16" length 1/4" gate opening



SP64-BLACK 3/16" steel wire, black resin 2 3/16" length 1/4" gate opening

Use SP70 for Stainless Steel



SPO/014-SS 1/4" steel wire, zinc or black resin plated 3 1/8" length 3/8" gate opening SPECIAL ORDER



Spring Link with Grommet stainless steel or steel gauges available: 3/16" - 1/4" - 5/16" - 3/8" - 1/2" SPECIAL ORDER

# **SPECIALTY QUICK LINKS**



QLP Pear Quick Link stainless steel gauges available: 1/8" - 3/16" - 1/4" - 5/16" - 3/8" - 1/2" - 5/8" SPECIAL ORDER



QLS Square Quick Link stainless steel gauges available: - 1/4" - 5/16" - 3/8" - 1/2" - 5/8" SPECIAL ORDER 1/8" - 3/16"



Delta Quick Link stainless steel gauges available: 1/8" - 3/16" - 1/4" - 5/16" - 3/8" - 1/2" - 5/8" SPECIAL ORDER

# **QUICK LINKS**



QL49 1/8" steel wire, zinc plated 1 1/2" length 1/4" gate opening Use QL65 for Stainless Steel




QL50 5/32" steel wire, zinc plated 1 9/16" length 3/16" gate opening




3/16" steel wire, zinc plated 2" length 1/4" gate opening Use QL66 for Stainless Steel




QL52 1/4" steel wire, zinc plated 2 1/4" length 9/32" gate opening Use QL67 for Stainless Steel




QL53 9/32" steel wire, zinc plated 2 9/16" length 5/16" gate opening

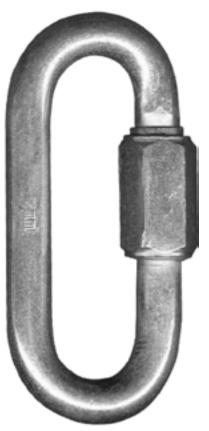


QL57 1/2" steel wire, zinc plated 4 3/16" length 9/16" gate opening

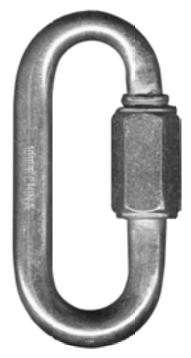

QL56 13/32" steel wire, zinc plated 3 1/2" length 1/2" gate opening



QL55 3/8" steel wire, zinc plated 3 5/16" length 1/2" gate opening Use QL69 for Stainless Steel



QL54 5/16" steel wire, zinc plated 3" length 3/8" gate opening Use QL68 for Stainless Steel

#### **CARABINERS**



Carabiners are available in various styles and finishes depending on your application. If don't see the style you need, let us know!







### **CARGO FLAT HOOKS**















FHK/200-10000 Flat Hook 2" web slot steel, yellow cadmium plated 10,000 lb.

## **CARGO FLAT SNAP HOOKS**





FSN/100-5000 Flat Snap Hook 1" web slot steel, yellow cadmium plated 5,000 lb.



FSN/200-5000 Flat Snap Hook 2" (1 3/4") web slot steel, yellow cadmium plated 5,000 lb.


# **CARGO RESTRAINT HARDWARE**



**SPECIAL ORDER** 



Stud Fitting - Short Thread with 1" D-Ring steel, yellow cadmium plated 4,000 lb. SPECIAL ORDER



ET-A/200 E-Track Fitting – Spring Actuated
2" web slot
steel, zinc plated
4,500 lb breaking strength
SPECIAL ORDER



ET/200 E-Track Fitting – 3-Piece 2" web slot steel, yellow cadmium plasted 3,000 lb.

#### **CARGO RESTRAINT HARDWARE**



SF16 Adjustable Stud Fitting steel, yellow cadmium plated 4,500 lb. vertical breaking strength SPECIAL ORDER

Success through Service



SF17 Single Stud Fitting with 1" O-Ring steel, yellow cadmium plated 4,000 lb. vertical breaking strength



SF18/100 Single Stud Fitting with 1" D-Ring steel, yellow cadmium plated 4,000 lb. vertical breaking strength



SF20 Double Stud Fitting with 1 3/4" Ring steel. yellow cadmium plated 5,000 lb. breaking strength SPECIAL ORDER



SF18/200 Single Stud Fitting with 2" D-Ring steel, yellow cadmium plated 4,000 lb. vertical breaking strength




LT-L Logistic Track Aluminum Available in various lengths SPECIAL ORDER



4,000 lb. vertical breaking strength


# SURPLUS & HARD-TO-FIND PARACHUTE HARDWARE




PS48 Separable Link 1 3/4" forged steel, cadmium plated Surplus version of MS70118



PS49 Separable Link 1 3/4" forged steel, cadmium plated Surplus version of MS22002



separable link
1"
forged steel, yellow chromate plated
Surplus version of 52B6660





PS186
channel adjuster bar with spring tensioner
1 3/4"
forged steel, zinc plated
Surplus
SPECIAL ORDER



PS171
Bolt-In End Fitting
1 3/4" slot, 1/2" hole
steel, cadmium plated
Surplus version of 56B524



PS44A17161 Clevis 7/8" split rollers forged steel, cadmium plated Surplus version of 44A17161






PS168
Container End Tab
1" slot, 1/2" hole
steel, chrome plated
Surplus version of MS70092-A
for use with PS168



for use with PS168



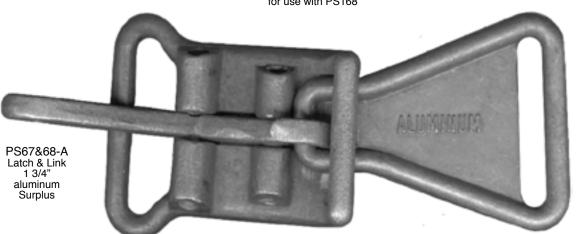

PS62
Reefing Ring
1/2" Inside Diameter
carbon tubing,
cadmium plated
Surplus version of MS27762





# WELDED D-RINGS – MEDIUM & LIGHT GAUGE



DR411 welded 2" x 1 7/16" 177" steel wire, black plated



#### OTHER STAINLESS STEEL **D-RINGS**

.188" wire .250" wire DR1810 DR2515 1 1/2" 1 3/4" .250" wire .250" wire DR2517 DR2520 These items are 304 Stainless. **SPECIAL ORDER** 

**DRC412** welded 1 1/2" x 1 1/8" 135" steel wire, nickel plated

**DRC412** welded 2" x 1 1/4" .135" steel wire, nickel plated



DR450 welded 1" x 7/8" .162" steel wire, nickel plated

DR450 welded 1" x 7/8" 162" steel wire. foliage or coyote SPECIAL ORDER DR0563

welded 5/8" x 9/16" .120" stainless steel nickel plated

DR0563 welded 3/4" x 11/16" .135" stainless steel nickel plated

DR0563 welded 1" x 7/8" .135" steel wire, black plated

DRC0563 welded 1" x 7/8" .135" steel wire, nickel plated

#### **CAST SOLID D-RINGS**



3/8" x 7/16" .094" zinc die cast nickel plated

1/2" x 1/2" .110" zinc die cast nickel plated



DRC452 5/8" x 9/16" .110" zinc die cast nickel plated



**DRC452** 3/4" x 11/16" .120" zinc die cast nickel plated



DRC452 1" x 7/8" .155" zinc die cast nickel plated

#### **NON-WELDED D-RINGS**



**DRC563** 5/8" x 1/2" .121" steel wire, nickel plated




**DRC563** 3/4" x 5/8" .135" steel wire, nickel plated





**DRC563** 7/8" x 3/4 135" steel wire, nickel plated



DRC563 1" x 7/8" .135" steel wire, nickel plated

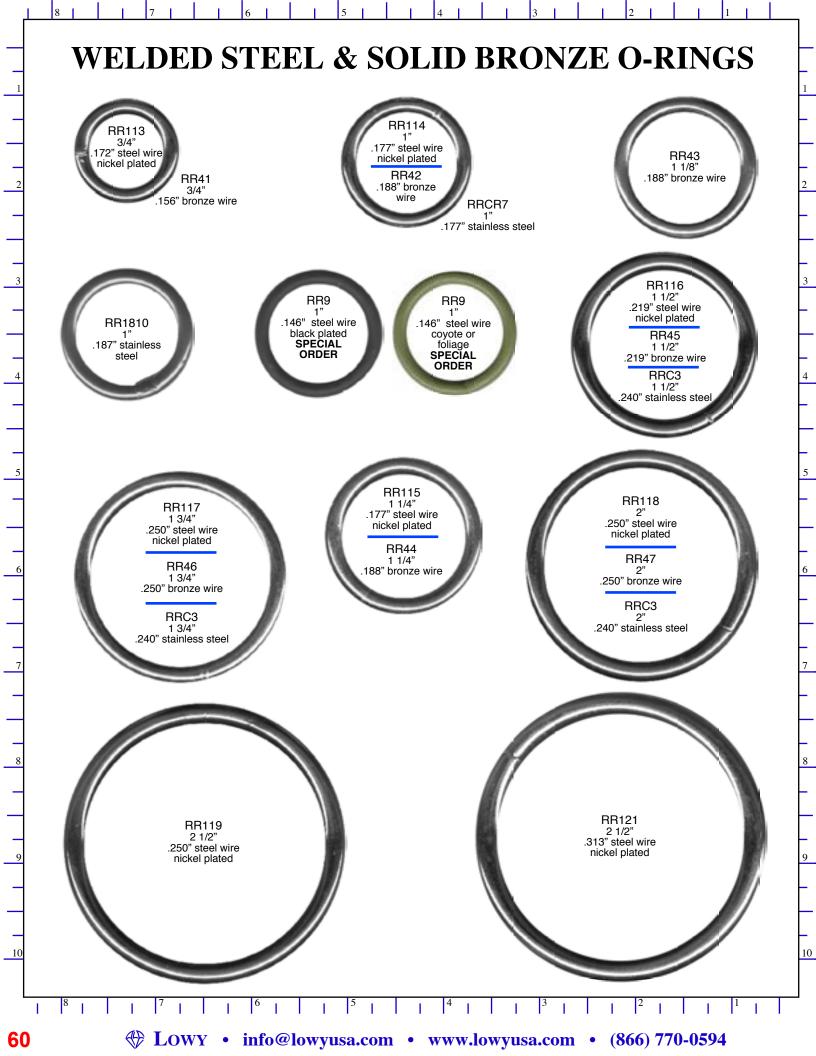

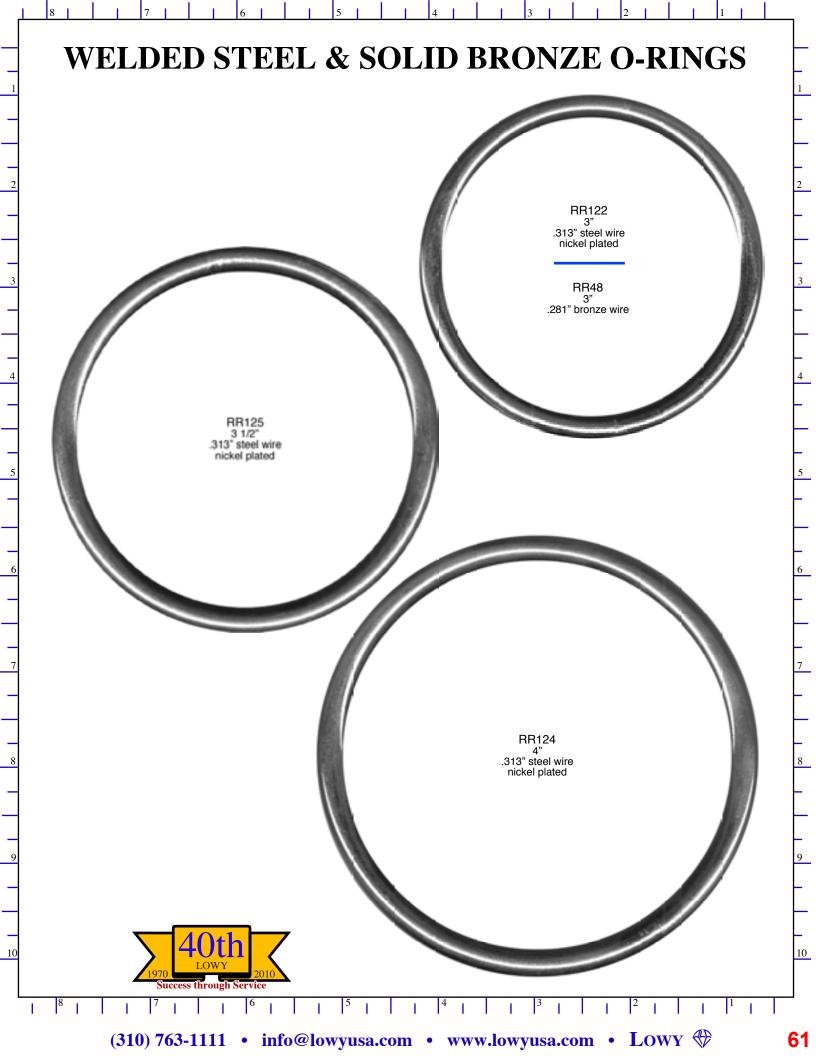

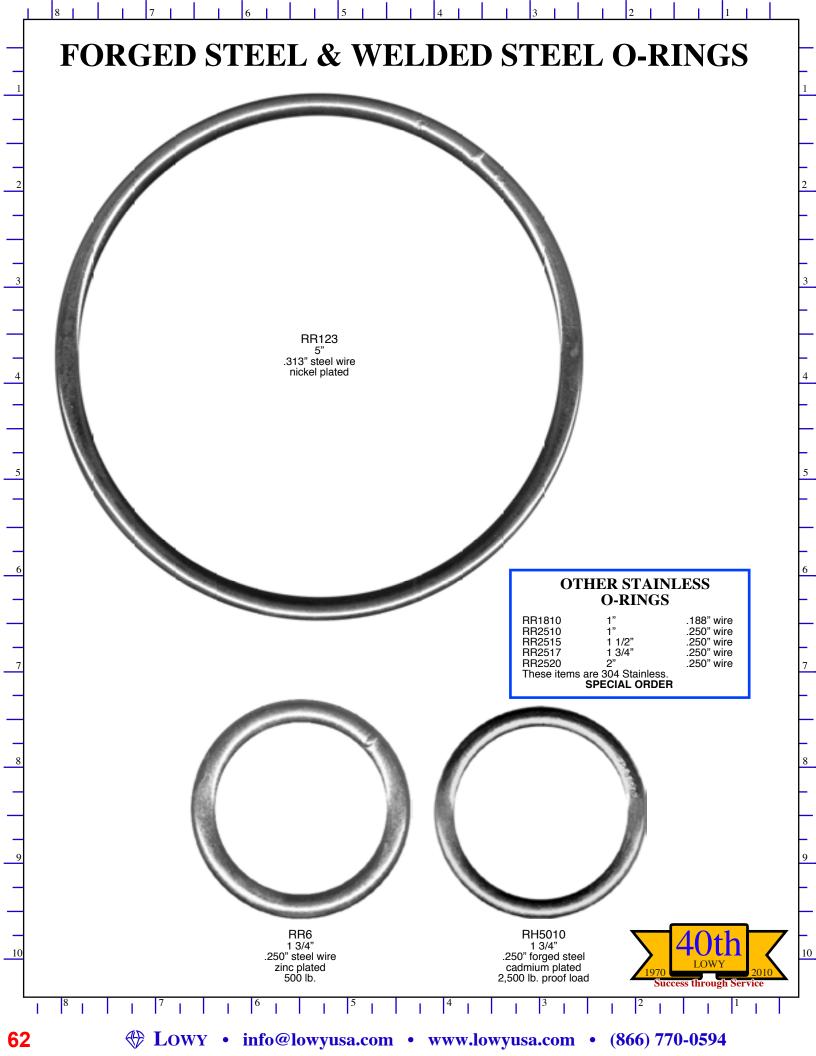





nickel plated

1/2" .100" zinc die cast

nickel plated



.100" zinc die cast

nickel plated



RR603 .145" zinc die cast nickel plated

# **SPLIT KEY RINGS**



KR130 1" steel wire, nickel plated

KR127 1 1/8" steel wire, brass plated



KR131 1 1/4" steel wire, nickel plated

1 1/4" steel wire, BLACK plated

KR128 1 1/4" steel wire, brass plated



KR132 1 1/2" steel wire, nickel plated

#### WELDED TRIANGLES



TR5420 welded 1" x 1" .125" steel wire, black plated

#### OTHER STAINLESS STEEL WELDED TRIANGLES

.188" wire .250" wire .250" wire .250" wire TR1810 TR2515 1 1/2" 1.3/4" TR2517 TR2520 These items are 304 Stainless.


**SPECIAL ORDER** 




TR5420 welded 1 1/2" x 1 1/2" .148" steel wire, black plated



TR5420 welded 2" x 2" .148" steel wire, nickel plated

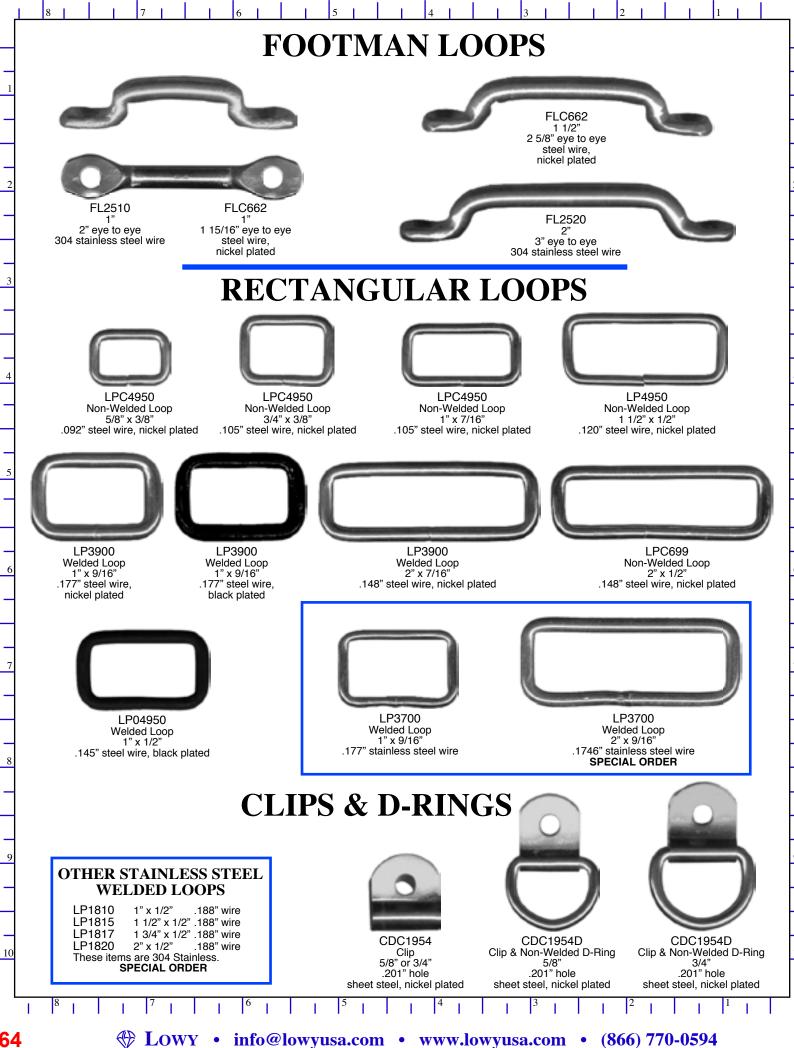



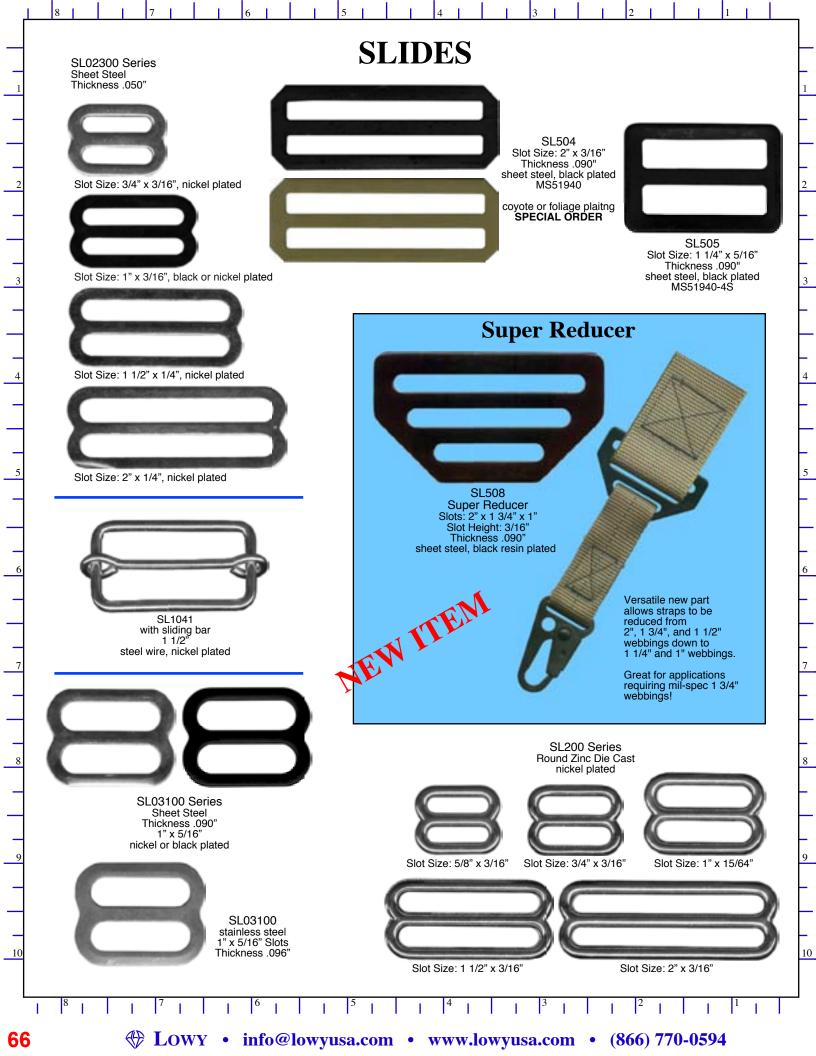

# **CLASPS & SLIDE ADJUSTERS**



CPC1357 Clasp 1 1/2" sheet steel, nickel plated




SL1810 Slide Adjuster 1" with knurled roller bar .188" 304 stainless steel wire




CP300 Clasp 1 1/2" zinc die cast, nickel plated SPECIAL ORDER



SL2517 Slide Adjuster 1 3/4" with knurled roller bar .250" 304 stainless steel wire SPECIAL ORDER



nickel plated



with k .188'
SPE

Slide Adjuster
2"
with knurled roller bar
.188" 304 stainless
steel wire
SPECIAL ORDER

# **SPRING-LOADED CAM BUCKLES**






CAM/034-300 3/4" zinc 300 lb SPECIAL ORDER





CAM/100-800 1" zinc 800 lb Made in Sweden








CAM-B/100-750 zinc, black resin plating 750 lb




CAM/100-1500 1" steel, zinc plated 1,500 lb








CAM/100-1800 1" steel, yellow chromate plated 1,800 lb

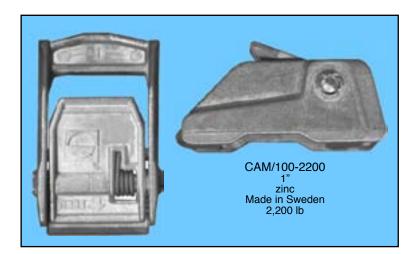

# **SPRING-LOADED CAM BUCKLES**





CAM/200-3000 2" steel, zinc plated 3,000 lb





PL-SSB1 Scuba Tank Band Buckle 2" delrin plastic buckle in black with stainless loop



CAM/200-SS Lift Cam Buckle 2" scuba style stainless steel


# RATCHET BUCKLES



RAT-FB/100-1200 Ratchet with Flat Handle steel, black resin plated 1,200 lb




Ratchet steel, yellow chromate plated 1,200 lb

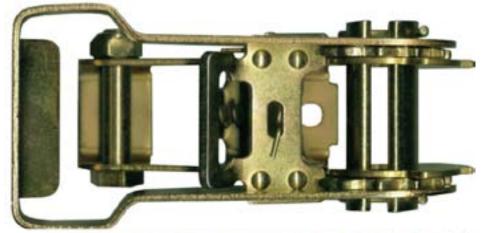

RAT/100-4000 Ratchet 1" steel, yellow chromate plated 4,000 lb


# RATCHET BUCKLES

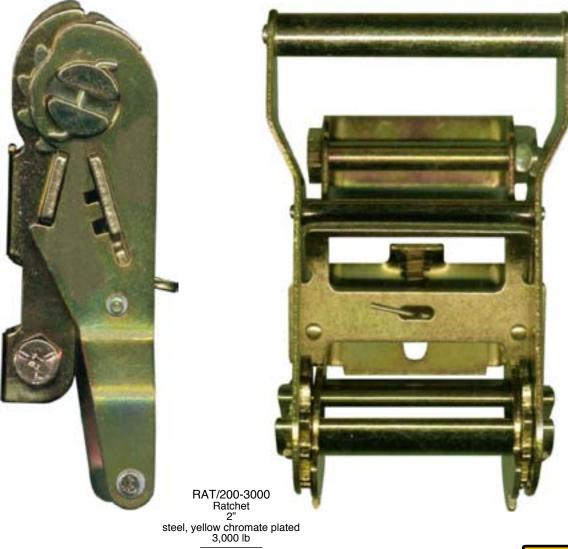

Also Available
RAT-SS/200-4000
2"
stainless steel
4,000 lb
SPECIAL ORDER





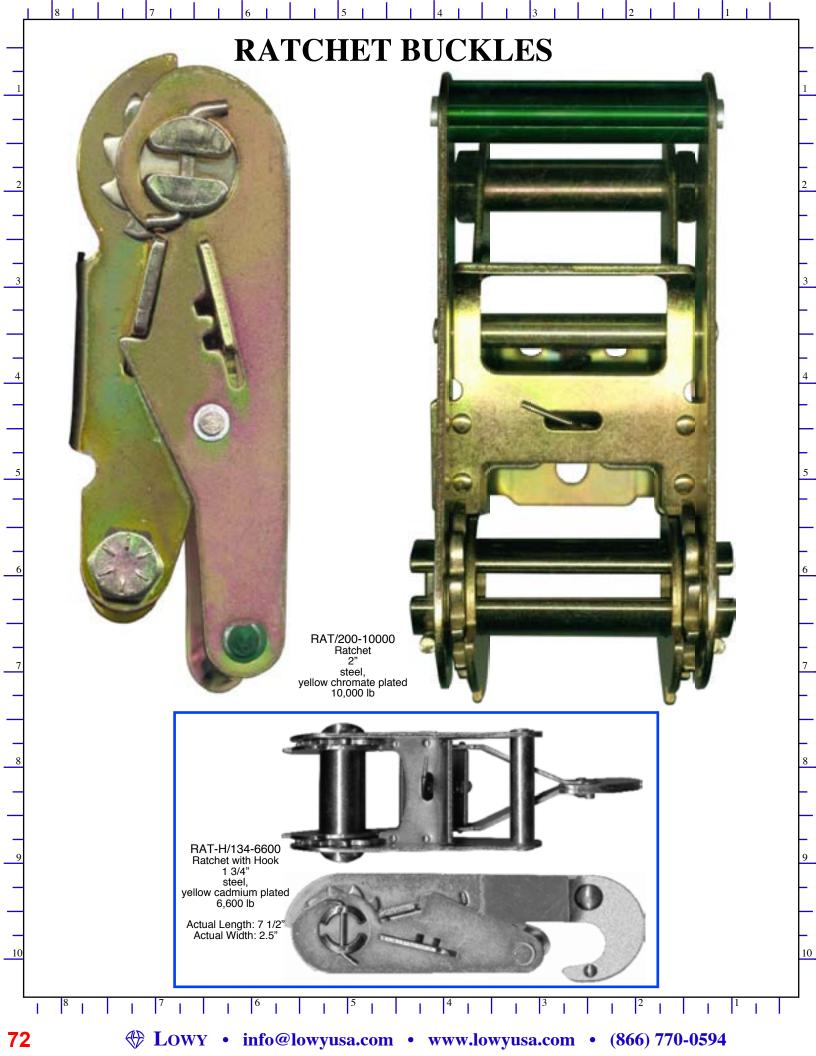

### SPRING-LOADED WEB CLAMP BUCKLES





BK105 5/8" zinc die cast nickel plated



BK6105 3/4" sheet steel nickel or black plated



BKC6105 sheet steel zinc plated



BKC6105 sheet steel nickel plated Also available in Stainless Steel BK6105



BKC6105 sheet steel black resin plated
Also available to meet MS51929-2 (SPECIAL ORDER)



BKC6105 1 1/2" sheet steel nickel plated
Also available in Stainless Steel BK6105



BKC6105 1 1/2" sheet steel black resin plated Also available to meet MS51929-3 (SPECIAL ORDER)

### **BUCKLES** BK5270 BK5270 Web Buckle Web Buckle 1 1/2" sheet steel, nickel plated sheet steel, nickel plated **BK635 BK635** BK635 Web Buckle Web Buckle Web Buckle 5/8" 3/4" sheet steel, nickel plated sheet steel, nickel plated sheet steel, nickel plated TBC3739 Tabler Buckle with Lip Under Tongue 1" AL4042-H Tabler Buckle with Hook End 1" AL4042-H Tabler Buckle with Hook End TB3739 TB3739 Tabler Buckle with Lip Under Tongue 3/4" Tabler Buckle with Lip Under Tongue 1" sheet steel, nickel plated sheet steel, nickel plated sheet steel, black plated sheet steel, nickel plated sheet steel, black resin plated Heavy Heavy TB4042 1" sheet steel, TB4042 Buckles can also be Special Ordered in military black plated Mil-B-543, Type V colors. TB4042 10 10 sheet steel, nickel plated

Lowy • info@lowyusa.com • www.lowyusa.com •

(866) 770-0594

### **BUCKLES** BK108 Center Bar BK115 Oval Center Bar Buckle 1 1/2" zinc die cast, **BK36** 3/4" nickel plating Oval Center Bar Buckle zinc die cast. brass plating






BK117-N Tongueless Center Bar 5/8" zinc die cast,



BK117-N Tongueless Center Bar 3/4" zinc die cast, nickel plating



BK210 Slide Buckle 3/8" zinc die cast, nickel plating



BK210 Slide Buckle 3/4" zinc die cast, nickel plating



**BK40** Loose Roller Buckle 3/4" zinc die cast, nickel plated



BK157 Center Bar 1/2" or 5/8" zinc die cast, nickel plated



BK147 Double Center Bar zinc die cast, nickel plated



**BK147** Double Center Bar 3/4" zinc die cast, nickel plated



BK147 Double Center Bar 5/8" zinc die cast, nickel plated



**BK147** Double Center Bar 3/8" zinc die cast, nickel plated



BK999 Heel Buckle with Loose Roller 1 1/2" steel, nickel plated



BK999 Heel Buckle with Loose Roller steel, nickel plated



**BK999** Heel Buckle with Loose Roller 3/4" steel, nickel plated



### METAL SIDE RELEASE BUCKLES



SR400 Metal Side Release adjustable, flat zinc die cast,


black or nickel plating



SR400 Metal Side Release adjustable, flat zinc die cast black or nickel plating




SR300A Metal Side Release curved 5/8" - 3/4" - 1" Aluminum satin or nickel plating





SR300 Metal Side Release curved 5/8" - 3/4" - 1" (not all sizes stocked) zinc die cast black or nickel plating






### METAL PUSH BUTTON BUCKLE





BK24 Push Button Buckle with Adjuster & Cover steel black or nickel buckle SPECIAL ORDER

### **TENT HARDWARE**

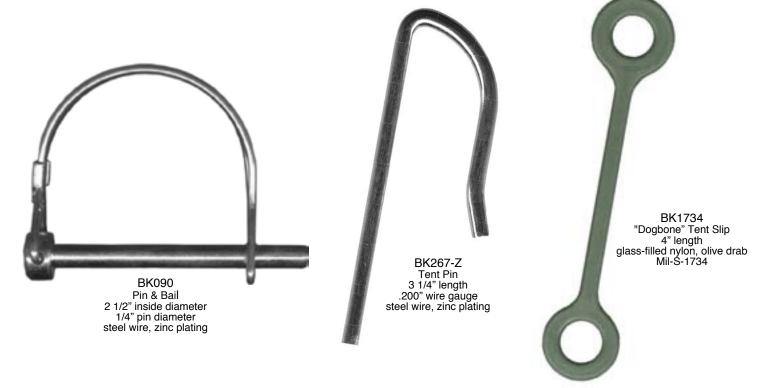


### E-Z CLIP QUICK RELEASE




- Creates an Instant Fix Point
- · Instantly shorten, tighten or stretch fabrics
- Reusable
- Eliminates grommets
- · Great for hanging backdrops, banners, curtain & more



nylon plastic, black

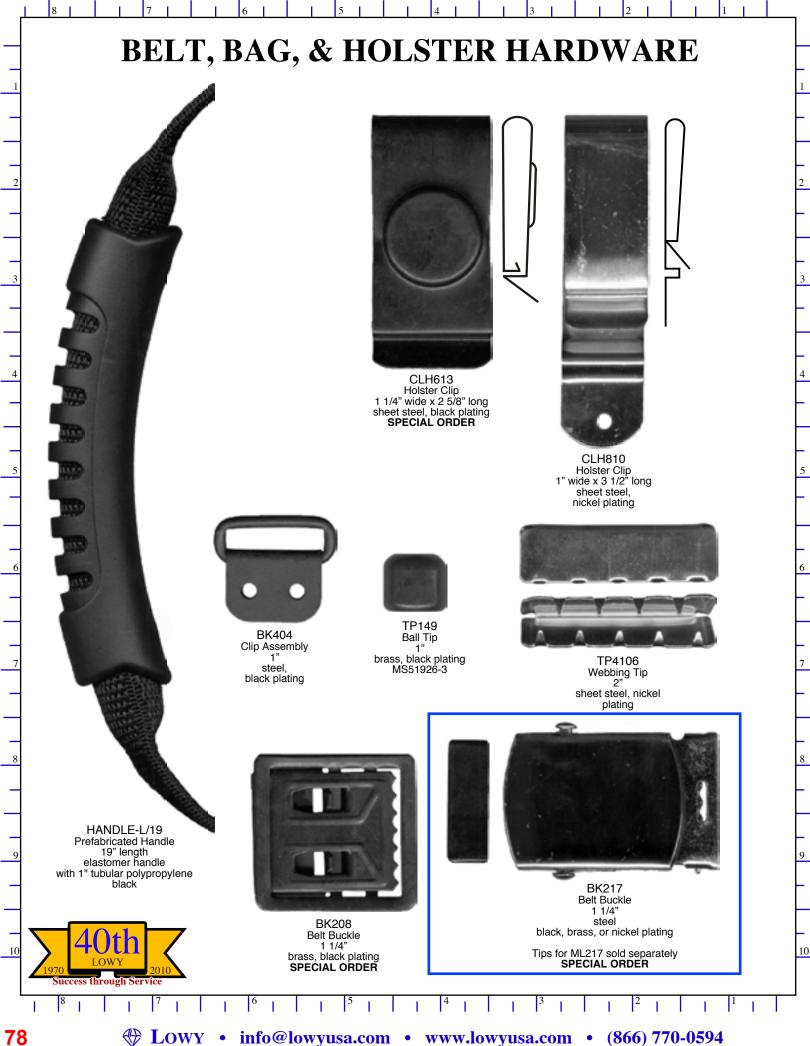



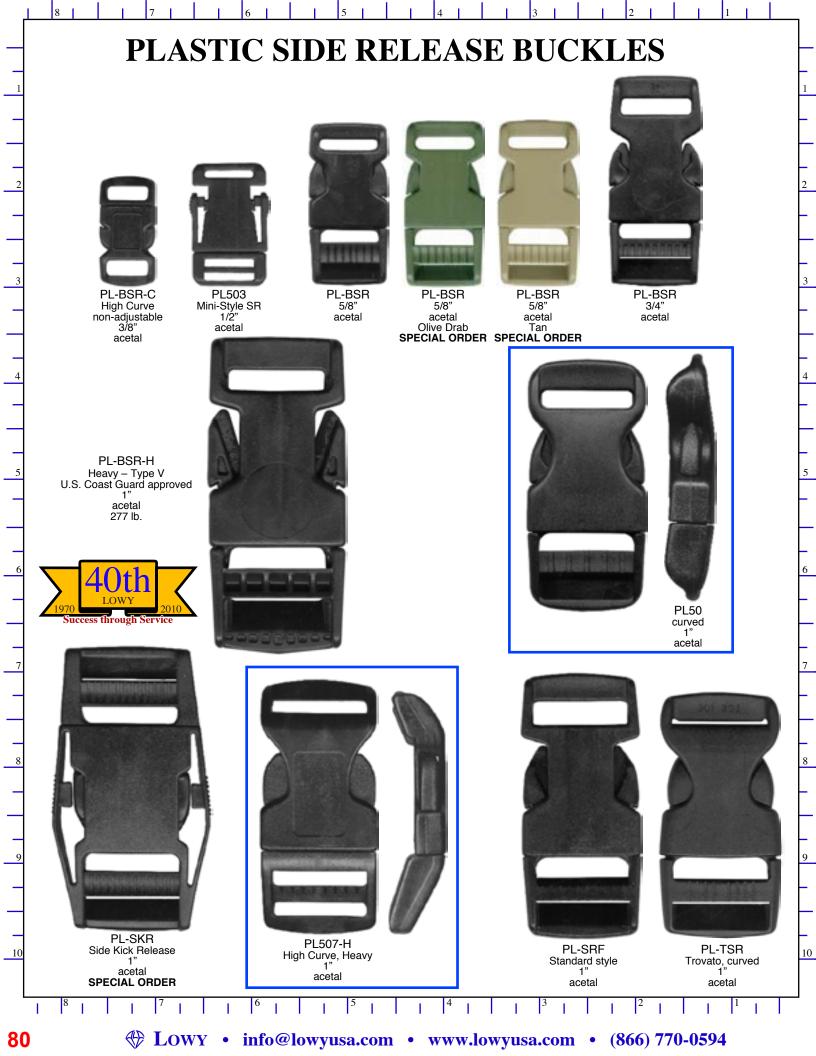





### **DUAL LOCKING SIDE RELEASES**



PL51D Dual Locking 1" acetal



PL51D Dual Locking 1 1/2" acetal




PL51D Dual Locking 2" acetal

### PLASTIC CAM BUCKLES



PL-CB or PL601 Cam Buckle 1 1/2" acetal



PL-CB or PL601 Cam Buckle 1" acetal



Side View



PL-CB or PL601 Cam Buckle 2" acetal




acetal











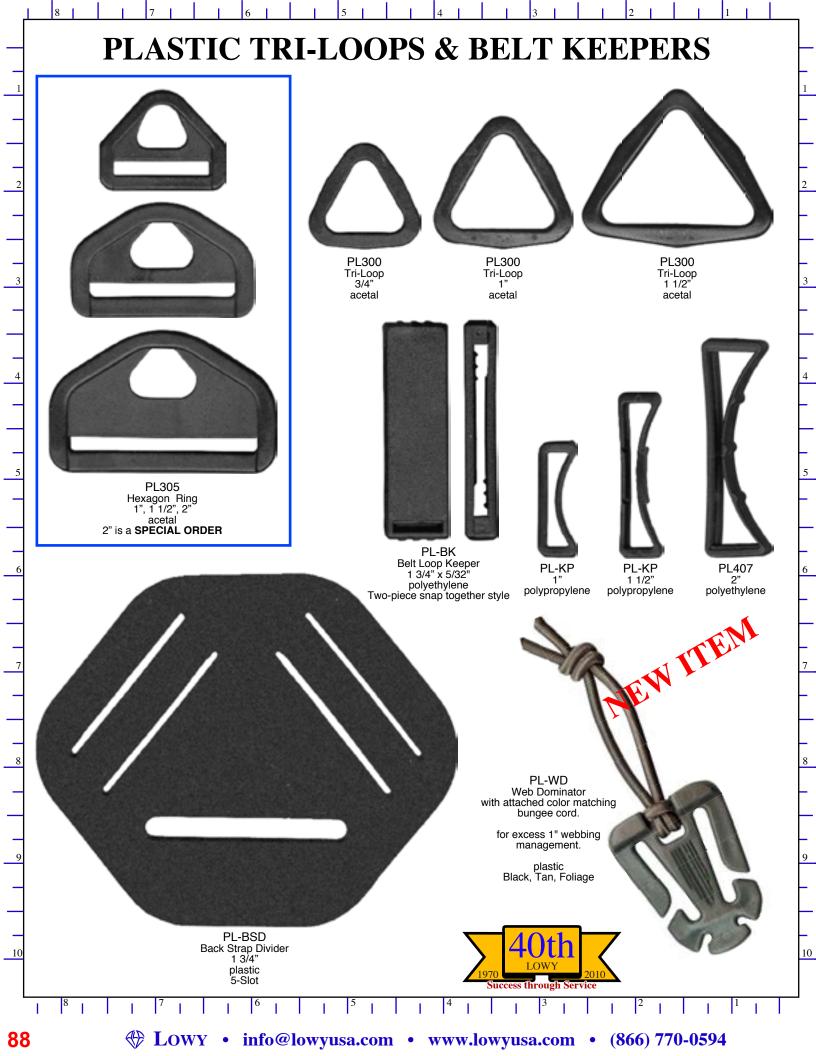





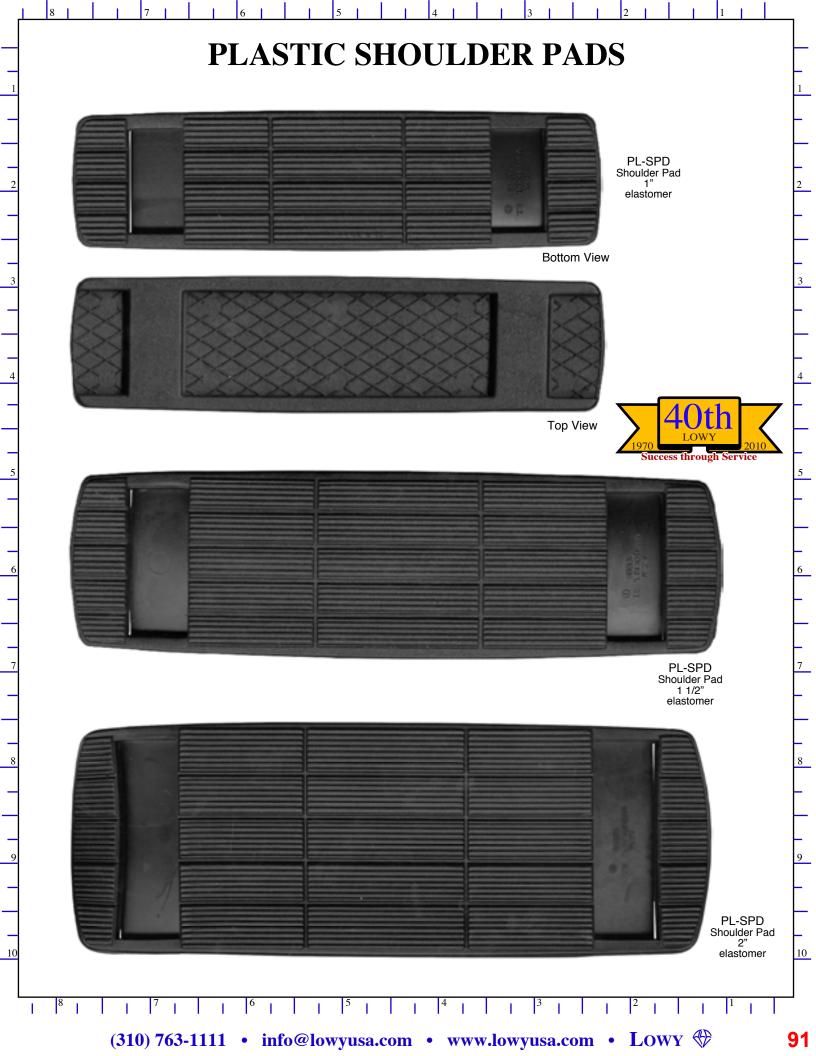

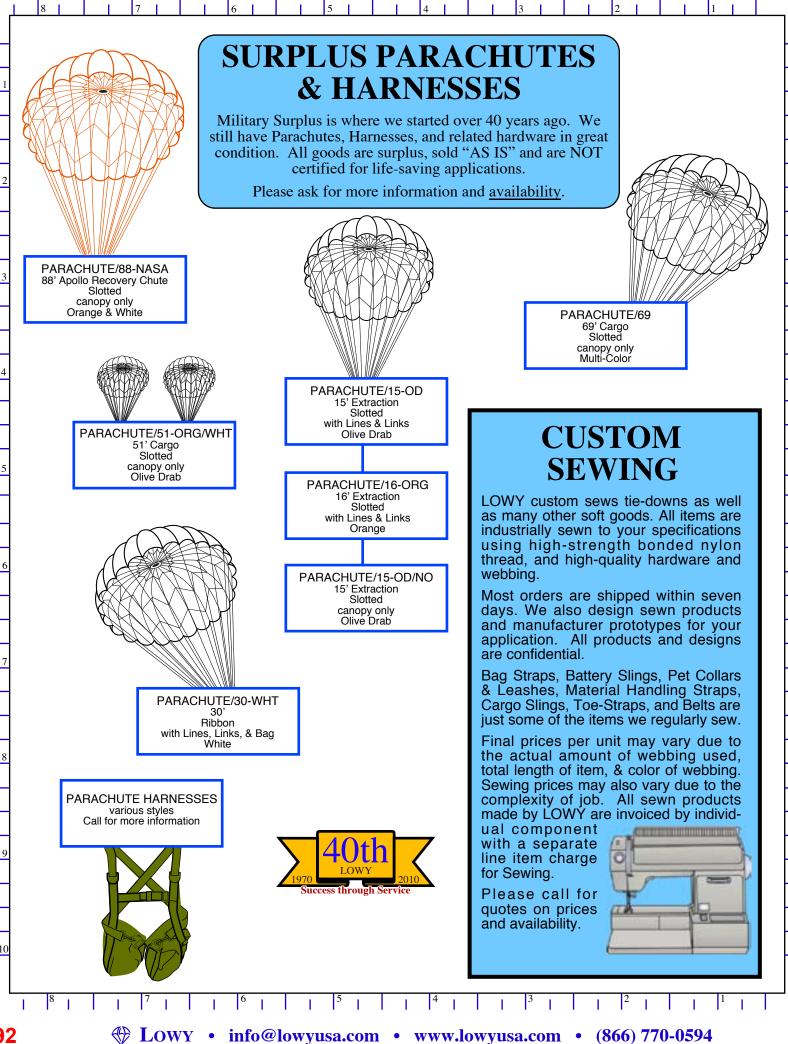

### **VELCRO USA® HOOK & LOOP**

Velcro USA® Hook & Loop
Sewable, Nylon
use VCHK for Hook
use VCLP for Loop
5/8" - 3/4" - 1" - 1 1/2" - 2" - 4"
50 yard rolls
Stock Commercial colors: Black, White
Stock Mil-Spec AA55126B (supercedes Mil-F-21840) colors:
Olive, Coyote, Foliage Green
Berry Amendment Compliant

Velcro USA® Hook & Loop
Spectrum Acrylic Pressure Sensitive (adhesive backing)
Nylon
use VCHK-PS for Hook
use VCLP-PS for Loop
5/8" - 3/4" - 1" - 1 1/2" - 2" - 4"
25 yard rolls
Stock Colors: Black, White
Berry Amendment Compliant

YKK Hook & Loop
Fire Retardant
Nylon
use VCHK-FR for Hook
use VCLP-FR for Loop
1" - 1 1/2" - 2"
50 yard rolls
Stock Color: Black
Meets F.A.R. 251 (a); FMVSS 302; NFPA 1971-1991

Velcro USA® One-Wrap® Back-to-Back Hook & Loop use VC-ONEWRAP Stock Size: 1" Available Sizes: 3/4" - 1 1/2" - 2" 25 yard rolls Stock Color: Black Berry Amendment Compliant







### 3M SCOTCHMATE DUAL LOCK

A positive locking, recloseable fastener with mushroom-shaped stems for a wide range of stringent applications.

material: Plastic Stock Size: 1" Stock Color: Black 50 yard rolls

3M3441 Type 400 (400 mushrooms/sq. inch), plain backed 3M3442 Type 170 (170 mushrooms/sq. inch), plain backed 3M3541 Type 400 (400 mushrooms/sq. inch), pressure sensitive 3M3542 Type 170 (170 mushrooms/sq. inch), pressure sensitive

Type 400 will mate to itself and Type 170. Type 170 will mate to regular Loop.



ALL VELCRO® USA & 3M SCOTCHMATE ITEMS ARE PRICED PER YARD AND SOLD IN FULL ROLLS.


Non-Stock products from Velcro® USA may require a 500 yard minimum order.





### **BONDED NYLON THREAD**

TH46	Size 46 BZT Stocked Colors: Black, White Uses: Leather, Cordura, Soft Goods Certifies to; Mil-VT-295, Type 2, Class A, Size B Berry Amendment Compliant
TH69	Size 69 BZT Stocked Colors: Black, Coyote, Foliage Green, Olive Drab, Red, Royal Blue, White Uses: General Sewing, Leather, Cordura, Pet Collars & Leashes, Bags, Soft Goods Certifies to: Mil-VT-295, Type 2, Class A, Size E Berry Amendment Compliant
TH92	Size 92 BZT Stocked Colors: Black, Foliage, Olive Drab, Red, Royal Blue, White Uses: General Sewing, Cordura, Tie-downs, Soft Goods Certifies to: Mil-VT-295, Type 2, Class A, Size F Berry Amendment Compliant
TH138	Size 138 BZT Stocked Colors: Black, Coyote, Foliage, Olive Drab, Purple, Red, Royal Blue, White Uses: Straps, Harnesses, Tie-downs Certifies to: Mil-VT-295, Type 2, Class A, Size FF Berry Amendment Compliant
TH207	Size 207 BZT Stocked Colors: Black, Red, Royal Blue, White Uses: Straps, Slings, Tack, Tie-downs, Harnesses Certifies to: Mil-VT-295, Type 2, Class A, Size 3/C Berry Amendment Compliant
TH346	Size 346 BZT Stocked Colors: Black, White, Olive Drab Uses: Cargo Straps & Slings, Harnesses, Tie-downs Certifies to: Mil-VT-295, Type 2, Class A, Size 5/C



Berry Amendment Compliant

Why do we charge by the ounce?

1 pound spools of thread from any mill almost never weigh one lb.
Some are fat and some are skinny depending on the mill's spooling.
We charge you for the number of ounces that you actually receive.

SPECIAL COLORS ARE AVAILABLE UPON REQUEST BUT MAY REQUIRE A MINIMUM ORDER.

TH46 6 - 7 TH69 9.50 - 11.50 TH92 14.40 TH138 18.50 - 23 TH207 26.50 - 32	9,600 6,000 4,800 3,150 2,000	MIL-SPEC SIZE B E F FF 3/C	SINGER NEEDLE 14 or 15 18 or 19 19, 20, or 21 21 or 22 26
TH346 42 - 51	1,200	5/C	_

How to Calculate the Total Number of Stitches in a stitch pattern (with a Safety Margin) needed for a required breaking strength:


Stitches needed in pattern = Specific Breaking Strength required divided by Breaking Strength of Thread being Used

Total Stitches with Safety Margin = Stitches needed in pattern + 20%


Example: Using Size 69 = 1,000 lb Required Strength / 9.50 lb. Strength of TH69 = 105.26 + 20% Safety Margin = 126 Stitches Required

NOTE: Safety Margin percentage used is for example purposes only.



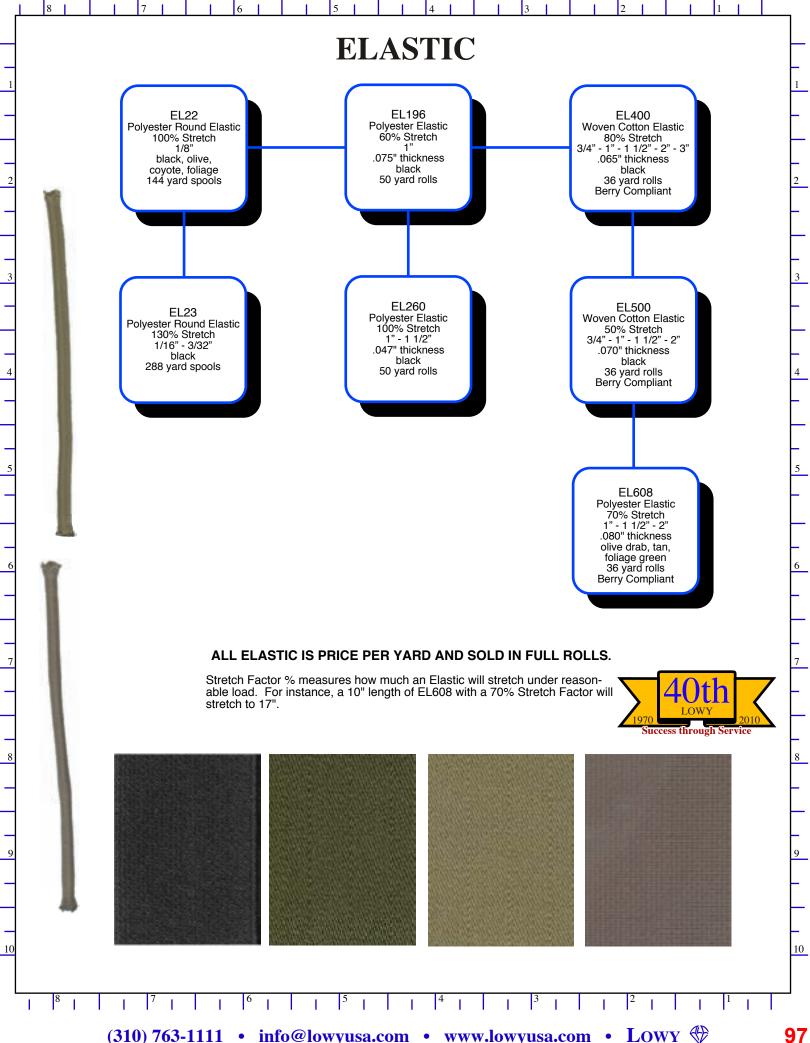

### **BUNGEE SHOCK CORD & HARDWARE**





**BU-CANBALL** Canopy Ball 5/32" - 1/4" plastic, black SPECIAL ORDER



#### ALL BUNGEE CORD IS SOLD IN FULL SPOOLS.

80% stretch polypropylene, black

30% stretch polypropylene, black

Stretch Factor % measures how much a Bungee Shock Cord will stretch under reasonable load. For instance, a 10" length of Standard BU with 80% stretch factor will stretch to 17".



**BU-HK** Cord Hook with Crimp Ring 1/4" - 5/16" - 3/8" - 1/2' steel wire, black




**BU-HK/ADJ** Lever Style Adjustable Hook plastic, black





BU-HK/038-ADJ Adjustable Hook 3/8" plastic, black




BU-HK/014-ADJ Adjustable Hook with keeper plastic, black

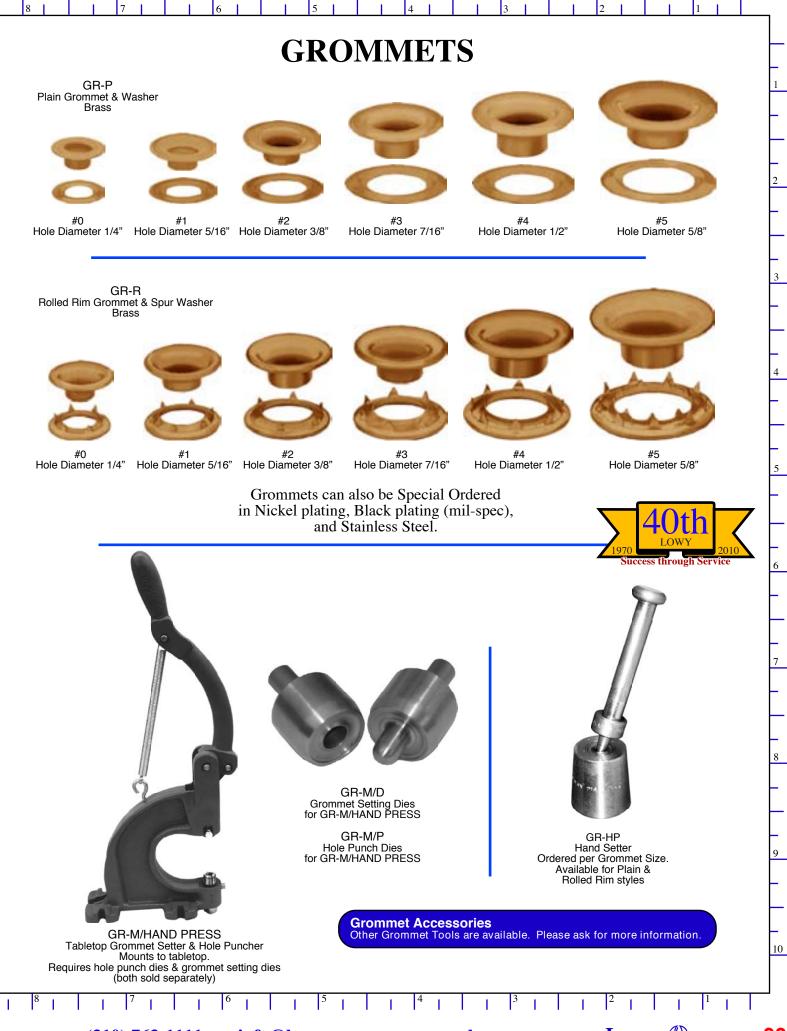

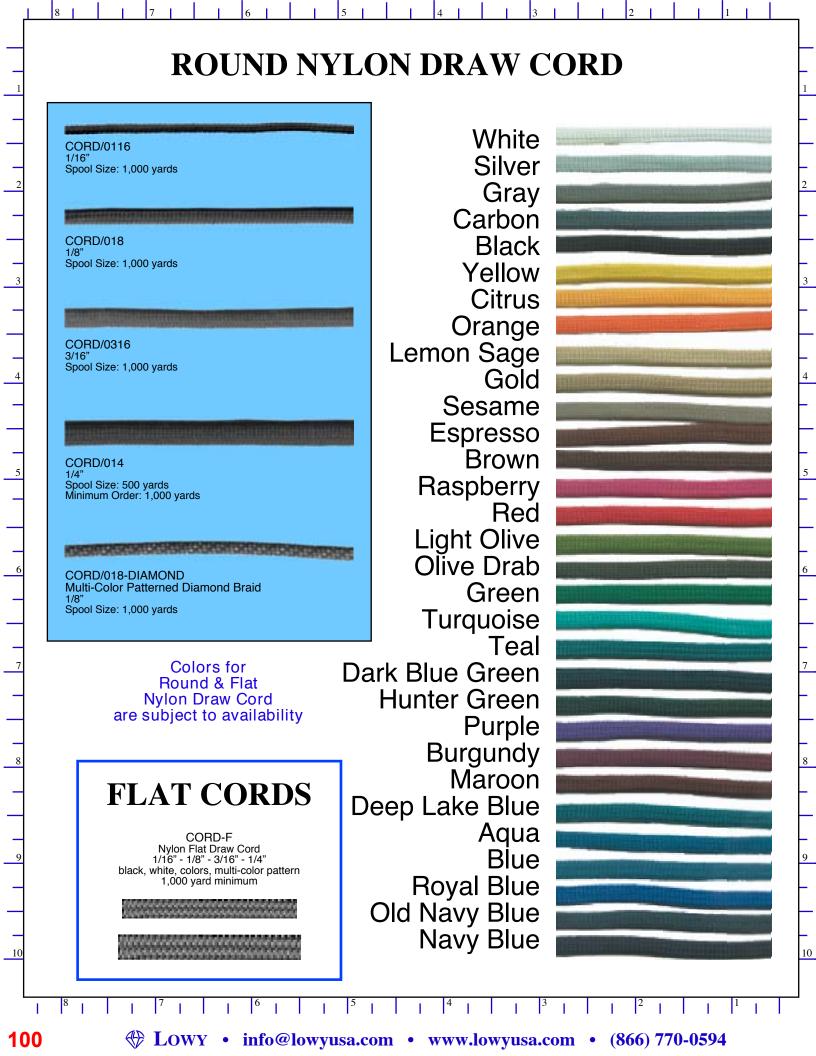

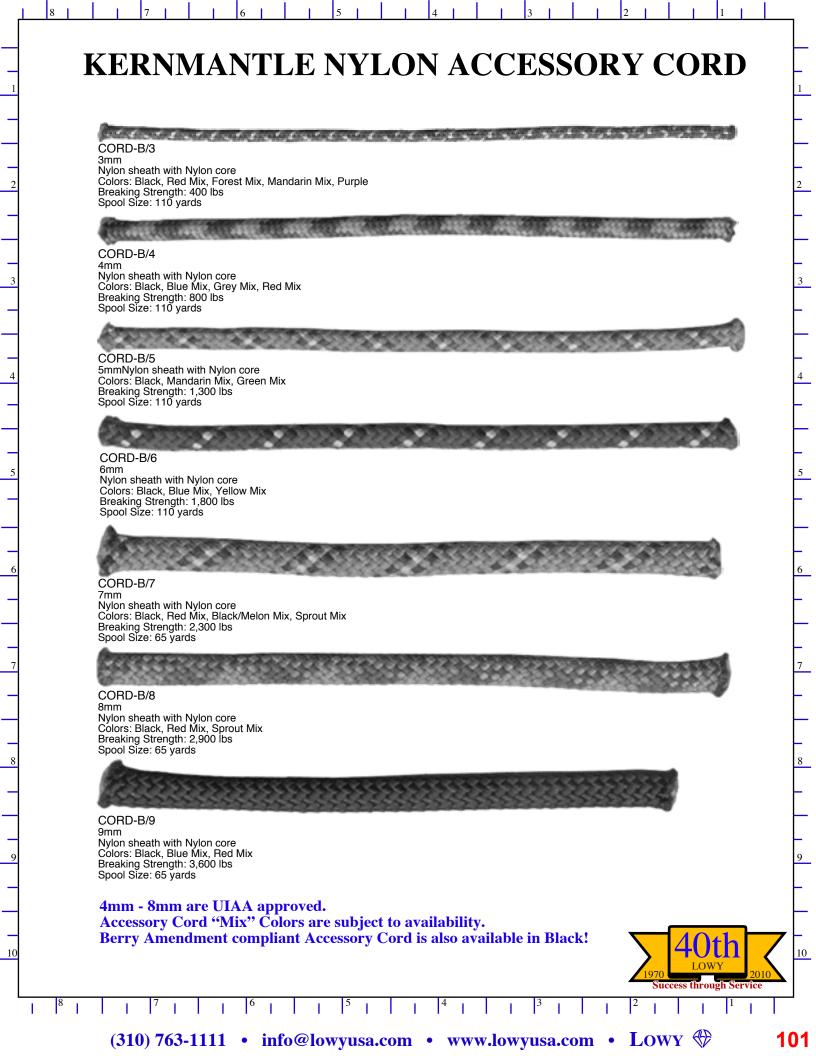

## ROPE – STATIC, DYNAMIC & RESCUE

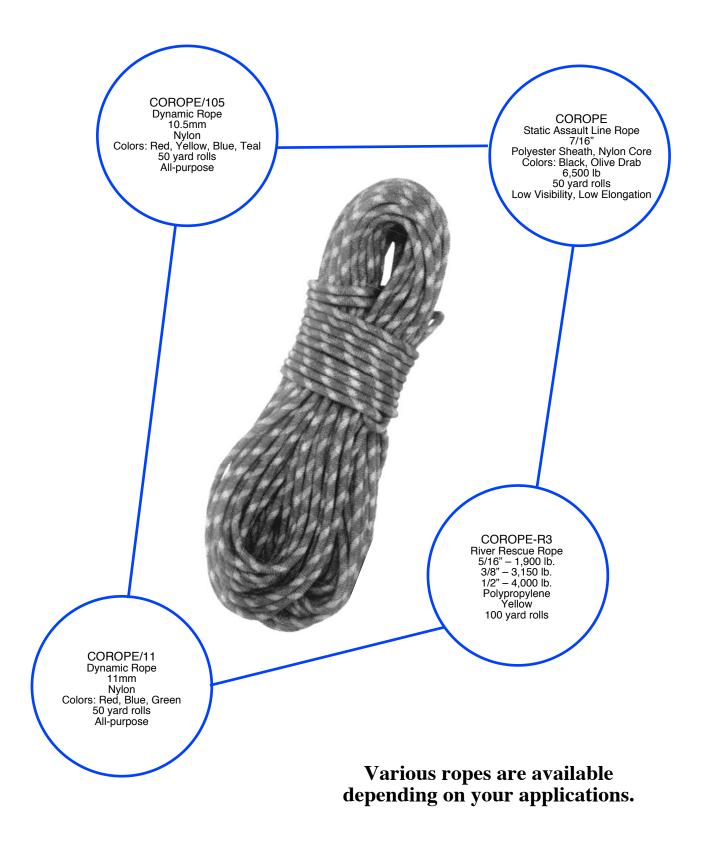


### THE PRODUCTION HOT CUTTER – ALPHC



- For Custom Hand Cutting or Continuous Production
- Cuts and Seals in one Easy Motion
- Wooden Base is Bench Mountable
- · Great for Webbing, Cord, Rope, and Hook & Loop,
- 4" Blade with 4" Heating Element
- Energy Efficient Variable Heat Control 110 Volt
- 500 Watts; Complies with U.L. Specifications
- · Made of Rugged Heavy Gauge Steel
- Made in the USA
- Actual Size: 5 1/2" High (Up Position) x 2 1/2" Wide x 18 1/2" Long
- Also available: 6" cutter

Hot Cutter Helpful Hint: Attach a chain and foot pedal to the arm of the ALPHC to speed up cutting even more. Your hands are free to move the webbing while your leg pulls down the cutting arm.

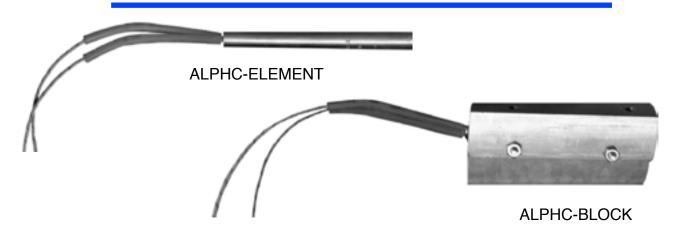

Replacement Parts Available for the ALPHC:

ALPHC-BLOCK Blade, Block, & Element Assembly

**ALPHC-BB** Blade & Block ALPHC-ELEMENT Heating Element ALPHC-SWITCH Power Switch



### HAND HELD ELECTRIC HOT KNIVES & **HOLE PUNCHES**


All Hot Knives and Hole Punches are designed for Cutting, Trimming, and Sealing:

- · Webbing: Nylon, Polypropylene, and Polyester
- Nylon Cord and Rope
- Cloth
- Other Synthetic Materials



HK/68 Screw-On Cutting Tip use with: HP-E/4037: 900° F Element HP-E/37-H: 1,000° F Element

#### **HOLE TIPS SIZES**




3/4"

7/8"

1"








Thread-On Hole Tips HP-T/014 1/4" HP-T/0516 5/16" HP-T/038 3/8" HP-T/0716 7/16" HP-T/012 HP-T/0916 9/16" HP-T/058 5/8" HP-T/034 HP-T/078 7/8" HP-T/100




Two-Wire Handle for HKT & HP-E Elements Three-Wire Ground Handle also available



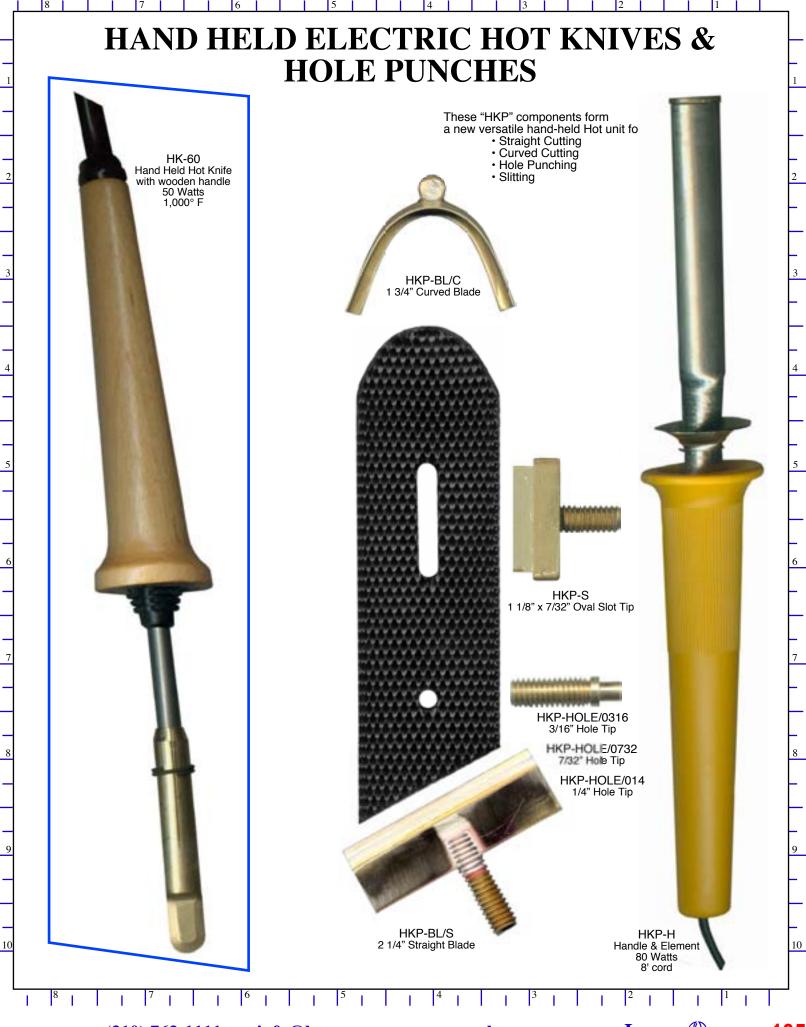

### **HOT CUTTERS**

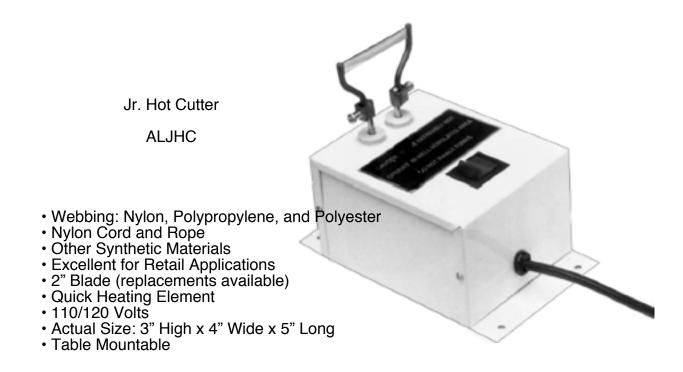



#### Hand Held Hot Cutter HC-Z9

- Designed to cut all thermoplastics
- Adjustable Temperature
- Compact construction
- Finger operated switch for heat control
- Heats up instantly
- 2" Blade (replacements available)
- Quick Heating Element
- 110 Volt, 120 Watts
- Blade Temperature up to 1,050° F
- 10' cord for portability
- 2 1/2 lbs.
- Size: 2" High x 1 3/4" Wide x 9" Long
- · Shipped with cutting blade for synthetic fibers and textiles
- Many blades available for other apps
- Made in Germany

### **HOT CUTTERS**




### Manual Hot Cutter HC-43

- Adjustable Temperature up to 700° F
  Self-Adjusting Temperature Setting

- Adjustable GuidesBlock Adjustable on Arm
- Heavy constructionSmooth-action Spring-Loaded Arm
- 4 3/4" Blade
- 120 Volt, 600 Watts
- 10 lbs.
- Shipping Dimensions: 21" x 8" x 21"
- 8" and 10" blade models availableFoot or Hand Switch models available
- · Various shaped blades available
- · Hole Burning models available



### **AUTOMATED HOT CUTTER**

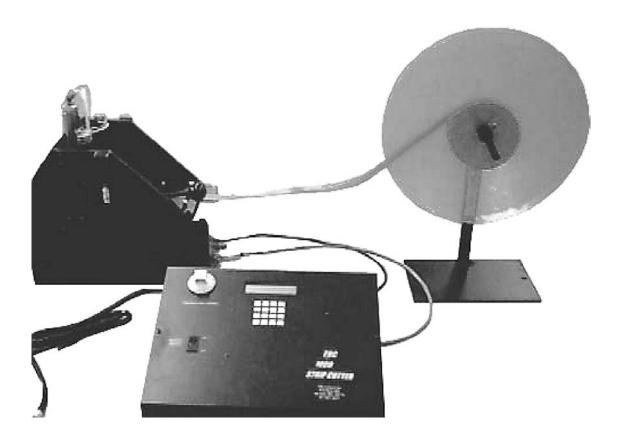

Automated Production Hot Strip Cutter ALPC-TRC1000

- Digital Control
- User Friendly
  Single Speed Motor with feed rate of 7.5" per second
  Maximum length: 50 feet
  Tolerances: 3/16" per 60"
  4 1/2" Blade with 4" Heating Element

- 110 Volt
- Requires 50 lbs of air pressure
- Made in the USA

#### Dimensions:


- Cutting Unit: 14" x 7" x 14"Roll Stand: 6" x 8" x 12"
- Control Panel: 10" x 14" x 6"

Warranty: Six (6) months on all parts and labor except heating elements.

This unit is also available as a Cold-only cutter.



### **AUTOMATED HOT CUTTER**

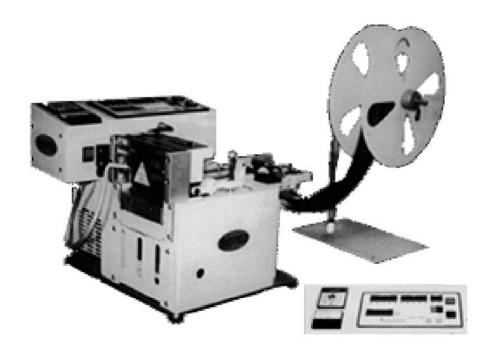

### Hot & Cold Automatic Strip Cutting Machine

Model: HC-530

#### **EASILY CUTS:**

Elastic

Webbing - up to 1/4" thick

Ribbons

Belt Loops

Hook & Loop

Nylon Cords

Leather

Safety Belts

Rubber

Vinyl

- POWER SUPPLY 110 volts.
- FEEDING SPEED adjustable up to 13 inches per second
- · CUTTING LENGTH approx. 400 ft.
- CUTTING WIDTH 4 inches
- TOLERANCE .05% of total cut.
- QUANTITY up to 99,999 pieces.
- COUNTER pre set up to 99,999
- SAFETY knife cover sensor & auto stop roll end sensor.
- AUTO feed/reverse.
- ALL PARTS AND LABOR GUARANTEED FOR 1 YEAR.



#### DIMENSIONS AND STRENGTHS

All dimensions and strengths listed in this catalog are actual within reasonable tolerances.

All Hardware dimensions are internal unless otherwise noted.

It is important to understand that the component with the lowest breaking strength in any fastening system will probably fail first. That is to say, any system is only as strong as its weakest link.

#### PROOF LOAD

The minimum rated strength a component is required to meet, and/or the minimum point before deformation to the part occurs.

#### **WORKING LOAD**

The maximum load a component should be subjected to during normal usage. It is recommended for safety purposes that a component's working load capacity not exceed 1/3 of its breaking strength capacity.

#### BREAKING STRENGTH

The minimum load a component will withstand before failure.

#### **CERTIFICATIONS**

Certifications of Conformance and test results are available upon request for most items. Surplus items and "seconds" cannot be certified.

All Loads and Strengths listed in this catalog are manufacturer's rated minimum capacities or applicable military specifications and not those of LOWY ENTERPRISES, INC. except for items made by and tested by LOWY ENTERPRISES, INC.



### **WARNING!**

HAVING NO CONTROL OVER THE USE OF ANY OF THE PRODUCTS LISTED OR NOT LISTED IN THIS CATALOG, LOWY ENTERPRISES, INC. ASSUMES NO LIABILITY CONNECTED WITH THEIR USE. UNDER NO CIRCUMSTANCES ARE WE OR THE SELLER LIABLE FOR ANY LOSS, DAMAGE, OR EXPENSES OF ANY KIND ARISING OUT OF THE USE OR INABILITY TO USE OUR PRODUCTS.

It is the responsibility of the user to determine the proper suitability and safety of a product for any particular use. LOWY ENTERPRISES, INC. suggests checking all applicable industry, trade association, federal, state, and local regulations.

Breaking strength and working load capacities in this catalog are based on the product being new, and being used under normal environmental conditions. All products are subject to age, wear, and deterioration, which can cause breaking strengths to decrease. LOWY ENTERPRISES, INC. strongly recommends that all products be inspected on a regular basis.



### GENERAL INFORMATION

#### **BUSINESS HOURS & ORDERING**

LOWY ENTERPRISES, INC. is open Monday through Friday from 8:00 am - 4:30 pm, Pacific Standard Time. For walk-in sales and will-call pick-ups at our Rancho Dominguez, CA warehouse, hours are 9:00 am - 12:00 pm, and 1:00 pm - 3:00 pm PST. We are closed for lunch from 12:00 pm - 1:00 pm for walk-in sales and will-call pick-ups.

LOWY ENTERPRISES, INC. accepts orders by telephone, fax, or e-mail. To insure correct shipping and to avoid costly errors, please use LOWY ENTERPRISES, INC.'s complete part numbers from our catalog or current invoices. Sizes, finishes, colors, materials, and breaking strengths help us fill your orders accurately and promptly.

#### MINIMUM ORDERS

LOWY ENTERPRISES, INC. has a \$50.00 minimum. Orders not meeting the minimum will either have a \$10.00 surcharge added, or the quantity of product will be increased, at our discretion. There are minimum packed quantities and standard roll sizes on certain products. Please ask for information regarding these parts.

#### SHIPPING & HANDLING

LOWY ENTERPRISES, INC. offers same day shipping via UPS or FEDERAL EXPRESS Ground Service for most orders. Please provide special shipping instructions when ordering. TNT EXPRESS is our preferred carrier for foreign shipments. All applicable shipping, COD, and handling charges are added to your invoice.

#### **TERMS**

LOWY ENTERPRISES, INC. ships orders COD or Credit Card. Net 30 credit terms are available upon approval. We accept a pre-printed company check, cashier's check, or cash. Payments are only accepted in U.S. Dollars. There is a \$20.00 charge for each Non-Sufficient Fund (NSF) check returned to us. NSF checks must be paid by cashier's check or credit card There is a \$20.00 plus \$20.00 charge.

#### CREDIT CARDS

We gladly accept Visa, Master Card and American Express credit cards. The credit card's security code, associated street address number and zip code are required for processing.

#### **PRICES**

All prices are subject to change without notice. All prices are in U.S. Dollars. Prices for all Hardware items are per Piece unless otherwise noted. Prices for all Soft Good items except thread are per Yard. Prices do not include applicable shipping and handling charges. Please call or e-mail for current pricing and quotations. We do not publish a price list so please call, fax or e-mail your pricing requests.

#### CALIFORNIA RESALE CARD

All California customers must have a legally filled out resale card on file with LOWY ENTERPRISES, INC. California customers who do not have complete resale cards on file with us will be charged sales tax. Faxed copies of a current resale card are

**RETURNS, EXCHANGES, AND ERRORS**LOWY ENTERPRISES, INC. carries only the highest quality products. We will attempt to make adjustments should an item be defective or not what you ordered. Please call us within 5 business days for a Return Merchandise Authorization Number (RMA) before returning any item. No credit will be given without an RMA Number. Returned goods must be in original condition. No returns are allowed after 15 business days. Goods sent back to us without authorization will not be accepted. A restocking charge of up to 25% may apply. Will-Call orders not picked up within 5 business days of ordering will be restocked and assessed a 5% restocking charge.

#### **BACK ORDERS**

LOWY ENTERPRISES, INC. tries to have a sufficient stock of all major items in our product line. However, due to unexpected demand or late deliveries, this is not always possible. If a part is not in stock or cannot be completely shipped, we will use our discretion in deciding whether this item is to be Back Ordered. Most back ordered items will be shipped promptly and invoiced at the time of shipping when the item becomes available.

#### PART PICTURES & COLORS


Part pictures in this catalog are meant to give very close representations of the items depicted. These pictures are not exact for color and size. Also, minor style and configuration changes to parts may occur without notice and may not be depicted in this catalog.

While every effort is made to ensure the most current and accurate product specifications in our catalog, product literature, and web site, infrequently errors may occur. We reserve the right to revise any specifications listed in these places.



### **ESTIMATED SHIPPING DAYS**

# UPS & FedEx Ground from LOWY in Rancho Dominguez, CA to YOU

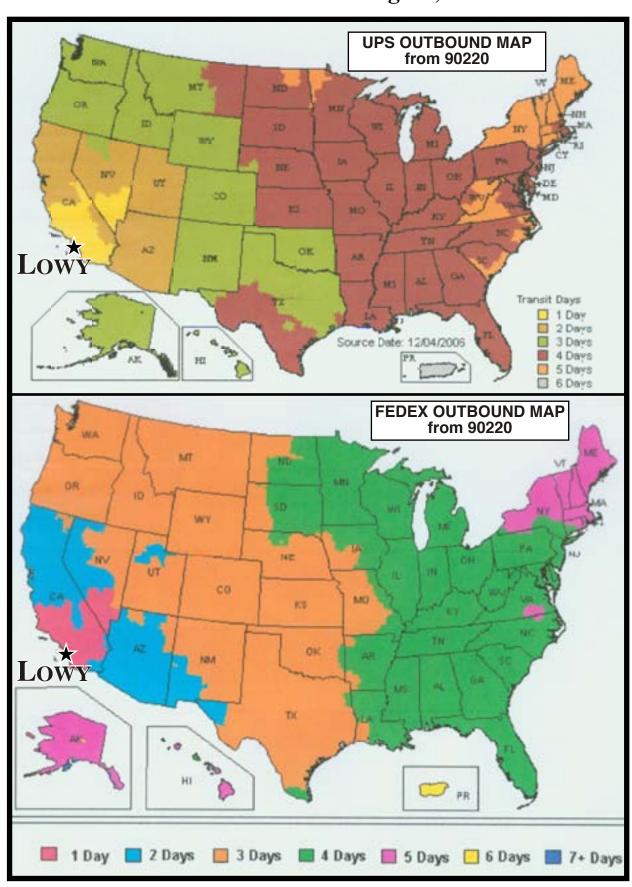



## **FAX ORDER SHEET**

- Easy Ordering!
- Fill in the Order Sheet (type directly into it!)
- Print & FAX to Lowy @ (310) 763-1112
  1970 E. Gladwick St. Rancho Dominguez, CA 90220 866-770-0594 310-763-1111

		т									
Date		PO#									
Company Name											
Shipping Ad	dress										
City, State, Zip											
Credit Card Number						Expiration. Da	te Security Code				
Contact					Telephone						
E-Mail Address from LOWY & shipp					FAX						
QUANTITY LC Units or PART I		OWY NUMBER mportant!)	SIZE		RIPTION PART	MATERIAL	FINISH or COLOR				
SHIPPING M	/ //ETHOD: W	Ve will ship U	PS or F	edEx Gro	ound if no o	choice is mar	ked.				
GROUND	NEXT DAY A	AIR TWO [	DAY AIR [	THRE	E DAY	WILL-CALL					
FOREIGN SHI	PPING: TNT [		UPS [	Fedi	Ex 🔲 AC	CT. NUMBER_					
PLEASE READ & SIGN: I hereby authorize Lowy Enterprises Inc. to charge the credit card above for this Faxed Purchase Order. I understand Lowy Enterprises Inc. will charge the credit card for the total amount of the goods plus any shipping and handling charges.											
	signature and date										



LOWY ENTERPRISES, INC.
World Domination Headquarters:
1970 E. Gladwick Street,
Rancho Dominguez, California 90220 USA

310.763.1111 866.770.0594 310.763.1112 Telephone: Toll Free Fax: www.lowyusa.com info@lowyusa.com Website: E-Mail:

Copyright 2009 Lowy Enterprises Inc. This catalog suprecedes all previous versions.

Happily produced on a Mac.



