

Volledige Onderdelenlijst Hardware

Graag beantwoorden we uw specifieke vragen.

Contacteer ons info@iera-aae.com

Tel. 056 50 63 90

Gsm 0479 83 52 46

	1202 D-Ring Parachute/Harness Military/Parachute 1202-1 PS22046-1 1202-2 PS22046-2 Fall Arrest/Safety 1202-1S/1202-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 3.5 ounces • Meets or exceeds PIA-H-7195 ANSI Z-359.2, and CSA Z-259.12-01
	1202-3 D-Ring Parachute/Harness Military/Parachute PS22046-3 PS22046-4 Same as 1202 with (2) .1406 dia. holes drilled on center bar 1" apart.	• Hot Forged Alloy Steel • Thermal Treated • Cad or Phosphate finish • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 3.5 ounces • Meets or exceeds PIA-H-7195
	1202SS D-Ring Same as 1202 in Stainless Steel	• Drop Forged and tested 17-4PH Stainless Steel • 100% Proof Load Tested @ 5000 lbs. • Electropolish finish • Approximate weight 3.8 ounces • Meets or exceeds ANSI Z-359.2
	1203 Adapter Parachute Harness, Quick Fit Military/Parachute 1203-1 PS22040-1 1203-2 PS22040-2 Fall Arrest/Safety 1203-1S/1203-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. and • 100% Side Load Tested @ 1000 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 3.1 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01

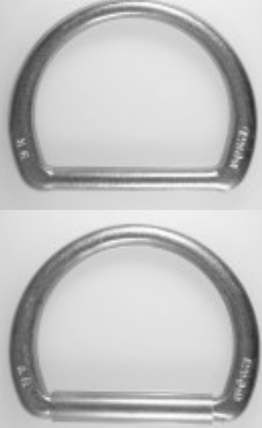
	1204 Hook Snap, Quick Connector Military/Parachute 1204-1 PS22042-1 1204-2 PS22042-2 Fall Arrest/Safety 1204-1G 1204-1S	• Hot Forged Alloy Steel • Thermal Treated • Cad, Zinc, Electroless Nickel or Chromate finish • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 5.8 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2 • Available with or without tabs
	1206 Hook Snap, Parachute Harness Quick Fit Military/Parachute 1206-1 PS22043-1 1206-2 PS22043-2	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. • 100% Side Load @1000 lbs • Approximate weight 5.8 ounces • Meets or exceeds PIA-H-7195
	1208 V-Ring Parachute Harness Triangle Military/Parachute 1208-1 PS22020-1 1208-2 PS22020-2	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195
	1208SS Triangle Link Military/Parachute	• Hot Forged 316 Stainless Steel • Thermal Treated • Electropolished Finish • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195

	1209 V-Ring Accessory Attaching Ring Military/Parachute 1209-1 PS70123-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 500 lbs. • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195
	1210 Hook Snap, Rope, 1"Eye Commercial 1210-1 1210-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 8.0 ounces
	1210P Hook Snap, Rope 1" Eye Electropolish Finish Commercial 1210P	• Hot Forged 17-4PH Stainless Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 9.0 ounces
	1211 Link Parachute Removable Connector Military/Parachute 1211-1 PS22002-1 1211-2 PS22002-2	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.6 ounces • Meets or exceeds PIA-H-7195/PIA-H-7195
	1212 Adapter Quick Fit, Reversible with tensioner& spring Military/Parachute 1212-1 PS70124-1 Fall Arrest/Safety 1212-1S	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 4.0 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2

	1213 Buckle 1-3/4" Tongue Buckle Fall Arrest/Safety 1213-1 1213-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 2.5 ounces • Meets or exceeds ANSI Z-359.2
	1215 D-Ring Fall Arrest/Safety 1215-1 1215-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 10000 lbs. • Approximate weight 6.0 ounces • Meets or exceeds ANSI Z-359 and CSA Z-259.12-01 • D-Ring is supplied with or without a roller.
	1216 Buckle Single or Double Pass Fall Arrest/Safety 1216-1 1216-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 6000 lbs. • Approximate weight 5.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	1217 D-Ring Ring, Circular Restraints Fall Arrest/Safety 1217-1 1217-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs • Minimum Tensile Strength 6000 lbs. • Approximate weight 7 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01 • D-Ring is supplied with or without a roller


	1218 D-Ring Cargo Restraint Military/Parachute 1218-7 MS22046-7 1218-8 MS22046-8	• Hot Forged Alloy Steel • Thermal Treated • Cad or Phosphate finish • 100% Proof Load Tested @ 5,000 lbs. • Approximate weight 8 ounces • Meets or exceeds PIA-H-7195
	1219A V-Ring Adjustable, with Tensioner and Spring Military/Parachute 1219-1 PS27765-1 1219-1D PS27765-1D Fall Arrest/Safety 1219-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 4.8 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2
	1219B V-Ring Adjustable without tensioner Military/Parachute 1219-1B PS27765-1B	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 4.5 ounces • Meets or exceeds PIA-H-7195
	1221 Link Connector, Harness Military/Parachute PS27764	• Hot Forged 2014 Aluminum Alloy • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195
	1222 Hook Snap Assembly, Ejector w/ Removable Pin and Roller Military/Parachute 1222-3 68D37721-3	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs • Approximate weight 6.0 ounces • Meets or exceeds PIA-H-7195



	1223E Hook Snap, Parachute Harness Quick Fit Ejector Military/Parachute 1223-1E PS22018-1E	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 6.0 ounces • Meets or exceeds PIA-H-7195
	1224 Adjuster Pass Buckle, Female Fall Arrest/Safety 1224-1 1224-1G Engineered to mate with 1225	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.0 ounces • Meets or exceeds ANSI Z-359.2
	1224 Adjuster Pass Buckle, Female Fall Arrest/Safety 1224-1SS Engineered to mate with 1225S	• Stamped 304 Stainless Steel • Electropolish Finish • Approximate weight 1.0 ounces • Meets or exceeds ANSI Z-359.2
	1225 Adjuster Pass Buckle, Male Fall Arrest/Safety 1225-1 1225-1G Engineered to mate with 1224	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.0 ounces • Meets or exceeds ANSI Z-359.2
	1225S Adjuster Pass Buckle, Male Fall Arrest/Safety 1225-1SS Engineered to mate with 1224S	• Stamped 304 Stainless Steel • Electropolish Finish • Approximate weight 1.0 ounces • Meets or exceeds ANSI Z-359.2


	1227 Hook Self Locking Swivel Fall Arrest/Safety 1227-1 1227-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 1.0 pounds
	1227-1-750 Swivel Hook with Overload Indicator Fall Arrest/Safety	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 750 lb. Overload Indicator
	1228 D-Ring 3" Strap Bar Fall Arrest/Safety 1228-1 1228-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 6000 lbs. • Approximate weight 8.1 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01 • D-Ring is supplied with or without a roller
	1229 D-Ring Parachute/Harness Military/Parachute 1229-1 1229-2 Fall Arrest/Safety 1229-1S/1229-1G Same as 1202 with 40 degree bend	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 5000 lbs • Thermal Treated • Minimum Tensile Strength 6000 lbs. • Approximate weight 3.5 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01


	1230 D-Ring Parachute Harness Military/Parachute 1230-1 11-1-485	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 6000 lbs • Approximate weight 4 ounces • Meets or exceeds PIA-H-7195
	1231 Hook Snap, Parachute Harness Military/Parachute 1231-1 PS22044-1 1231-2 PS22044-2 1231-1S 1231-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs I • Approximate weight 4.2 ounces • Meets or exceeds PIA-H-7195
	1232 Adapter Strap Adjusting Military/Parachute 1232-3 PS22014-3 Fall Arrest/Safety 1232-3S	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 1000 lbs. • 100% Side Load Tested @ 1000 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.7 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2
	1233 Hook Snap Assembly, Ejector Parachute 1233-1 PS22017-1	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs • Approximate weight 4.0 ounces • Meets or exceeds PIA-H-7195


	1233E Hook Snap, Parachute Harness Quick Fit Ejector Military/Parachute 1233-1E PS22017-1E	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 4.0 ounces • Meets or exceeds PIA-H-7195
	1234 Hook Self Locking Snap Fall Arrest/Safety 1234-1 1234-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 12.0 ounces
	1235 D-Ring Separable Bar Military/Parachute 1235-1 101407	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 4 ounces • Meets or exceeds PIA-H-7195
	1236 Adapter Quick Fit, Small Frame Military/Parachute 1236-1 PS70114-1 Fall Arrest/Safety 1236-1S/1236-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • 100% Side Load Tested @ 1000 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01
	1236 Adapter Quick Fit, Small Frame Racing Harness 1236-1S	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • 100% Side Load Tested @ 1000 lbs.

		• Minimum Tensile Strength 4000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01 • NASCAR Approval Pending
	1237 V-Ring Military/Parachute 1237-1 PS22045-1 1237-2 PS22045-2	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs • Approximate weight 2.0 ounces • Meets or exceeds PIA-H-7195
	1238 Adapter Harness Strap, Uneven Slide Military/Parachute 1238-1 PS22047-1 1238-2 PS22047-2 Fall Arrest/Safety 1238-1S 1238-1G	• Stamped Sheet Metal Alloy • 100% Proof Load Tested @ 1000 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.0 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2
	1239 Link Parachute Separable Connector Military/Parachute 1239-1 52B6660	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 6000 lbs. • Approximate weight 3 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195
	1240 Hook Snap, Parachute Harness Military/Parachute 1240-1 11-1-2501 1240-1S	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 4.2 ounces • Meets or exceeds PIA-H-7195

	1241 Hook Snap, Parachute Chest Type Connector Military/Parachute 1241-1 PS70121-1 1241-2 PS70121-2 Without wings	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 7.4 ounces • Meets or exceeds PIA-H-7195
	1242 Link Parachute Separable Heavy Duty Connector Military/Parachute PS24553-1 1670-EG-005	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 15,000 lbs • Approximate weight 8.4 ounces • Meets or exceeds PIA-H-7195
Picture Available Soon	1243 Link Parachute, Separable Heavy Duty Connector 1" version of 1242 Military/Parachute	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 15,000 lbs • Meets or exceeds PIA-H-7195
	1244 Link Parachute Separable Connector 1" version of 1239/52B6660 Military/Parachute 1244-1	• 1" version of 1239/52B6660 • Hot Forged Alloy Steel • 100% Proof Load Tested @ 6000 lbs. • Approximate weight 4 ounces • Meets or exceeds PIA-H-7195
	1245 Adapter Parachute Harness Adjusting Strap Military/Parachute 1245-1 PS22014-2 Fall Arrest/Safety 1245-1S	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 1000 lbs. • 100% Side Load Tested @ 1000 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.7 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01

	1246 Adapter Reversible Quick Fit Military/Parachute 1246-1 PS22019-1 Fall Arrest/Safety 1246-1S	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • 100% Side Load Tested @ 1000 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 3.0 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01
	1247 Link Speed Link, Parachute Removable Connector Military/Parachute 1247-1 MS22021-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs and Side Load 1500 lbs. • Approximate weight 2.9 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195
	1248 Link Pear Shaped Hoist & Cargo Net, Light Duty Parachute 1248-1	• Hot Forged Carbon Steel • Proof load test 5% sample at 2500 lbs • Approximate weight 2 pounds
	1250 Link Solid Connector/Adjuster Military/Parachute 1250-1 PS70108-1 1250-2 PS70108-2 Fall Arrest/Safety 1250-1S 1250-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2 ounces • Minimum Tensile Strength 5000 lbs. • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01
	1252 Link Connector Assembly Military/Parachute 1252-1 PS70118-1 1252-2 PS70118-2 1252-3 PS70118-3	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 3 ounces • Meets or exceeds PIA-H-7195

	1253 Link 1" Removable Parachute Connector Military/Parachute 1253-1 MS22021 1" Version	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.9 ounces • Meets or exceeds PIA-H-7195
	1254 Link Safety Belt, Adjustable Shoulder Strap Military/Parachute 1254-1 42A14566 Fall Arrest/Safety 1254-1S/1254-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 1200 lbs • Approximate weight 1.1 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01
	1255 Link Anchor, Lap Safety Belt 3" web Slot Military/Parachute 1255-1 PS22010-1 1/4" ID Bushing 1255-2 PS22010-2 5/16" ID Bushing	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 5.3 ounces • Meets or exceeds PIA-H-7195
	1256 Adjuster Safety Shoulder Harness Military/Parachute 1256-1 MS22007-1 1256-2 MS22007-2 with spring 1256-1 PS22007-1 1256-2 PS22007-2 with spring	• Stamped Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2000 lbs. • Approximate weight 3.0 ounces • Meets or exceeds PIA-H-7195
	1256 Adjuster Safety Shoulder Harness Racing Harness 1256-1S 1256-2S with spring	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs • Approximate weight 3.0 ounces • Meets or exceeds SFI 16.1 and ANSI Z-359.2 • NASCAR Approval Pending
	1256 Adjuster Safety Shoulder Harness Fall Arrest/Safety 1256-1S/1256-1G 1256-2S/1256-2G with spring	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs • Approximate weight 3.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01

	1257 Adapter Reversible Quick Fit Military/Parachute 1257-1 PS70101-1 1257-2 PS70101-2 1257-3 PS70101-3 Fall Arrest/Safety 1257-1S 1257-1G	• Stamped Sheet Metal Alloy • 100% Proof Load Tested @ 500 lbs • 100% Side Load Tested @ 200 lbs. • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.3 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2
	1258 Link Lap, Safety Belt 3" Web Slot Military/Parachute 1258-1 PS22003-1 Fall Arrest/Safety 1258-1S	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 5.3 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and CSA Z-259.12-01
	1259 V-Ring Parachute Harness Quick Fit Military/Parachute 1259-1 PS70102-1 1259-2 PS70102-2 1259-3 PS70102-3	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 4.3 ounces • Meet or exceeds PIA-H-7195
	1260 Clevis Riser, Air Delivery Type III Military/Cargo 1260-1 PS70086-1	• Hot Forged Carbon Steel • Thermal Treated • 100% Proof Load Tested @ 2000 lbs. • Approximate weight 5.2 ounces • Meets or exceeds PIA-H-7195
	1261 Clevis Suspension, Cargo Air Delivery Type I Military/Cargo 1261-1 PS70087-2	• Hot Forged Alloy Steel • Thermal Treated • Proof Load Tested @ 20,000 lbs. • Approximate weight 4 lbs. 5 ounces • Meets or exceeds PIA-H-7195

	1262 Hook Snap, Quick Connector Parachute Harness Military/Parachute 1262-1 MS22042 w / 1" web slot	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 5.9 ounces • Meets or exceeds PIA-H-7195
	1263S Link Roller Link Assembly, Shoulder Parachute Harness Military/Parachute 1263-7 60A125C9-7	• Hot Forged 316 Stainless Steel • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195
	1264 Link Assembly, Extraction Line, Single, Type IV Military/Cargo 11-1-3359	• Alloy Steel • Phosphate finish • 100% Proof Load Tested @ 40,000 lbs. • Approximate weight 2 lbs. 6 ounces
	1268 O-Ring Reefing Ring Military/Parachute 1268-1 PS27762 48A7995	• Carbon Steel • Approximate weight 1.0 ounces • Meets or exceeds PIA-H-7195

	1269 Hook Snap, Cargo Net Military/Parachute 1269-1 1269-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 11000 lbs. • Approximate weight 10.0 ounces • Meets or exceeds PIA-H-7195
	1270 Adapter Parachute Harness, Quick Release Military/Parachute 1270-1 44A9360	• Stamped Sheet Metal Alloy • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 1.7 ounces • Meets or exceeds PIA-H-7195
	1270 Adapter Quick Release Racing Harness 1270-1S Fall Arrest/Safety 1270-1S 1270-1G	• Stamped Sheet Metal Alloy • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 1.7 ounces • Meets or exceeds ANSI Z-359.2 and SFI 16.1 • NASCAR Approval Pending
	1271 Adjuster Lap, Aircraft Safety Belt 3" web slot Military/Parachute 1271-1 MS22004-1 PS22004-1	• Stamped Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 5.8 ounces • Meets or exceeds PIA-H-7195
	1272 Adjuster Lap, Safety Belt 3" web slot Racing Harness 1272-1	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 5.5 ounces • Meets or exceeds SFI 16.1 • NASCAR Approval Pending


	1272 Adjuster Lap, Safety Belt 3" web slot Fall Arrest/Safety 1272-1 1272-1G	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 5.5 ounces • Meets or exceeds ANSI Z-359.2
	1273 Latch & Base Assembly, Lap Safety Belt, Quick Release, 3" web slot Racing 1273-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 5.3 ounces • Meets or exceeds SFI 16.1
	1274 Latch & Base Assembly, Lap Safety Belt, Quick Release 1-3/4" web slot Racing 1274-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 4.8 ounces • Meets or exceeds SFI 16.1
	1275 Link Lap Safety Belt 1-3/4" Web Slot Military/Parachute 1275-1 44B26454 Fall Arrest/Safety 1275-1S Racing 1275-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.5 ounces • Meets or exceeds PIA-H-7195, ANSI Z-359.2 and SFI 16.1
	1275A Link Lap Safety Belt 1-3/4" Web Slot with Leather Racing 1275-1A	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.9 ounces • Meets or exceeds ANSI Z-359.2 and SFI 16.1

	1276 Buckle 3 Bar adjuster 1" Web Slot Fall Arrest/Safety 1276-1 1276-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 4000 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	1277 Adjuster Oval Ring Fall Arrest/Safety 1277-1 1277-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	1278 D-Ring 3"D Ring/w 1"web slot Fall Arrest/Safety 1278-1 1278-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 4.3 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	1279 Link Center Link, Driver Resistant Racing 1279-1S	• Stamped and tested sheet metal alloy • 100% Proof Load Tested @1500 lbs • Approximate weight 2.2 ounces • Meets or exceeds ANSI Z-359.2 and SFI 16.1
	1280 Anchor Anchor Plate Racing 1280-1	• Stamped Carbon Steel • 100% Proof Load Tested @ 1500 lbs. • Approximate weight 2.3 ounces • Meets or exceeds SFI 16.1 • NASCAR Approval Pending

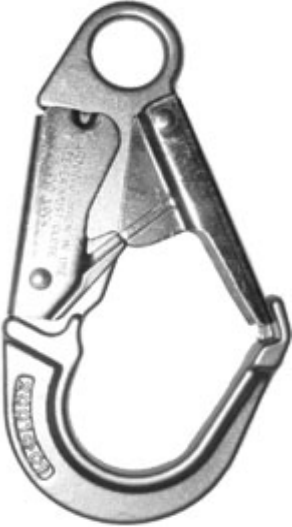
	1280B Anchor Anchor Plate with 30 Degree Bend Racing 1280-1B	• Stamped Carbon Sheet Metal • 100% Proof Load Tested @ 1500 lbs. • Approximate weight 2.3 ounces • Meets or exceeds and SFI 16.1
	1281 Latch & Base Assembly, Lap Safety Belt Quick Release, 3" web slot Racing 1281-1S	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 12.0 ounces • Meets or exceeds SFI 16.1
	1282 Latch & Base Assembly, Quick Release Lap Belt, 1-3/4" web slot Racing 1282-1 55C1303M	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Loaded @ 1250 lbs. • Approximate weight 4.0 ounces • Meets or exceeds SFI.16.1 • NASCAR Approval Pending
	1283 D-Ring 2"Strap Bar Fall Arrest/Safety 1283-1 1283-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 4.8 ounces • Meets or exceeds ANSI Z-359 and CSA Z-259.12-01 • D-Ring is supplied with or without a roller
	1284 D-Ring Light Weight Circular Restraint Fall Arrest/Safety 1284-1 1284-1G	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 4.6 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01


		D-Ring is supplied with or without a roller
	1286 Hook End Fitting Snap with 2" web slot Commercial 1286-1	- Stamped Sheet Metal Alloy - Thermal Treated - Approximate weight 3.0 ounces
	1288 Link Lap Safety Belt Military/Parachute 1288-1 55B1307 Racing 1288-1S	- Hot Forged Alloy Steel 100% Proof Load Tested @ 1250 lbs. - Approximate weight 1.5 ounces - Meets or exceeds PIA-H-7195 and ANSI Z-359
	1290 Link Quick Release 1-3/4" Web Slot Military/Parachute 1290-1 MS70098-1 1290-2 MS70098-2 Racing 1290-1S	- Hot Forged Alloy Steel 100% Proof Load Tested @ 1500 lbs. - Approximate weight 2.8 ounces - Meets or exceeds PIA-H-7195, ANSI Z-359 and SFI 16.1
	1291 Hook Snap, Quick Release Military/Parachute 1291-1 PS70099-1 1291-2 PS70099-2	- Hot Forged Alloy Steel - Approximate weight 8.3 ounces - Meets or exceeds PIA-H-7195

	1292D Latch & Link Lap Safety Belt Assembly Quick Release 3" web slot with drilled holes in latch Racing Harness 1292D-1	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds SFI.16.1 • NASCAR Approval Pending
	1292DL Latch & Link Lap Safety Belt Assembly Quick Release 3" web slot with leather Racing 1292DL-1	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds SFI.16.1 • NASCAR Approval Pending
Picture Available Soon	1292D-SL Latch & Link Lap Safety Belt Assembly Quick Release 3" web slot with Spring Tensioner and Leather Racing	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds SFI.16.1 • NASCAR Approval Pending
	1292M Latch & Link Lap Safety Belt Assembly Quick Release 3" web slot with drilled holes in link Racing 1292M-1	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds SFI.16.1 • NASCAR Approval Pending
	1293 Adjuster 3" Bar Adjuster Racing Harness 1293-1	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 3.3 ounces • Meets or exceeds ANSI Z-359.2 and SFI 16.1 • NASCAR Approval Pending


	1293 Adjuster 3" Bar Adjuster Fall Arrest/Safety 1293-1 1293-1G	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 3.3 ounces • Meets or exceeds ANSI Z-359.2
	1294 Link Solid Connector Adjuster Fall Arrest/Safety 1294-1 1294-1G Racing 1294-1 1294-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds ANSI Z-359.2 and SFI 16.1
	1295 Hook Self Locking Snap Commercial 1295-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 5000 lbs. • Tensile Strength 6000 lbs. • Approximate weight 8.0 ounces
	1296 D-Ring Cargo Tie Down Military/Parachute 353512-1 11-1-6944	• Hot Forged Alloy Steel • Thermal Treated • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 3 ounces • Meets or exceeds PIA-H-7195
	1298 O-Ring 3" O.D. - 2.25" I.D. Military/Parachute 1298-1 11-1-599 Cargo/Fall Arrest/Safety 1298-1S 1298-1G	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 3,600 lbs • Meets or exceeds PIA-H-7195 • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-0

	1299 V-Ring Triangle, Reversible Quick Fit Fall Arrest/Safety 1299-1/1299-1G 1299-2	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 4.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	1466 Apex Hook External Cargo Air Delivery Military/Cargo 1466-1 6020	• Hot Forged Alloy Steel • Thermal Treated • 100% MPI • 100% Proof Load Tested @ 11,000 lbs. • Minimum Tensile Strength 20,000 lbs. • Approximate weight 1.2 ounces
	1467 Apex Fitting External Cargo Air Delivery Military/Cargo 1467-1 6019	• Hot Forged Alloy Steel • Thermal Treated • 100% MPI • 100% Proof Load Tested @ 22,000 lbs. • Minimum Tensile Strength 50,000 lbs. • Approximate weight 3.0 lbs.
	1689S Ring Container Lift Military/Cargo 6214106	• Hot Forged Stainless Steel • Thermal Treated • 100% Proof Load Tested @ 5,000 lbs
	2000 D-Ring Fall Arrest/Safety 2000-1 2000-1G	• Hot Forged Alloy Steel • Thermal Treated • Cad or Zinc finish • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs.

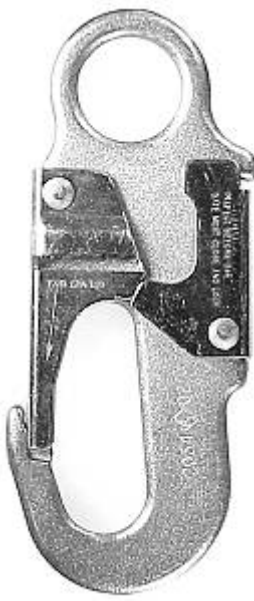
		• Approximate weight 6.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2001 Hook, 1 3/4 Fall Arrest 2001-1 2001-1G (Gold)	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 5,000 lbs.
	2002 Hook 2-1/2" Locking Rebar Fall Arrest/Safety 2002-1 2002-1G	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 5000 lbs. • Minimum Tensile Strength 6000 lbs. • Approximate weight 1 lb. 6.4 ounces
	2004-1 O-Ring 4" O.D. - 3" I.D. Cargo/Commercial	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • Ultimate Load - 33,750 lbs. • Approximate weight 10 oz. • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2005 O-Ring Parachute Ring 2 Parachute 2005-1 924065 Engineered to mate with 2006	• Hot Forged Alloy Steel • Electroless Nickel Finish • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195



	2006 O-Ring Parachute Ring 3 Parachute 2006-1 924075 Engineered to mate with 2005	• Hot Forged Alloy Steel • Electroless Nickel Finish • 100% Proof Load Tested @ 3000 lbs. • Approximate weight 2.0 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195
	2007 Latch Base, 2" Racing	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 3,000 lbs • Meets or exceeds SFI.16.1 • NASCAR Approval Pending
	2008SS Link Harness Link Military/Parachute 2008-SS 814AS801-1	• Hot Forged 15-5PH Stainless Steel • 100% Proof Load Tested @ 2500 lbs and 1000 lbs side load • Approximate weight 2.0 ounces • Meets or exceeds PIA-H-7195 and PIA-H-7195
	2009SS Adapter Parachute Harness Assy 2009-SS 814AS802	• Hot Forged 15-5PH Stainless Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs. and • 100% Side Load Tested @ 1000 lbs. • Approximate weight 1.7 ounces • Meets or exceeds PIA-H-7195
	2011 Link Short Left and Right Safety Belt Link Racing 2011L 2011R	• Stamped Alloy Sheet Metal • 100% Proof Load Tested @ 2500 lbs. • Approximate weight 1.8 ounces • Meets or exceeds SFI 16.1

		
	2012 Swing Link Chain Commercial 2012-1	• Hot Forged Alloy Steel • 100% Proof Load Tested @ 5000 lbs. • Approximate weight 8.0 ounces • Meets or exceeds ANSI Z-359.2
	2014-1 Buckle, 3" Commercial Fall Arrest	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 3,600 lbs • Approximate weight 6.4 oz. • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2015-1 Snap, Aluminum Parachute Lanyard Military/Parachute PS27756 MS27756	• Hot Forged Aluminum Alloy • Thermal Treated • Anodize Finish, color as requested • 100% Proof Load Tested @ 500 lbs • Throat opening 5/16" (8mm) • Approximate weight 1.6 oz. • Meets or exceeds PIA-H-7195
	2017-1 Clevis Military/Cargo 11-1-2801 (Assy) 11-1-2802 (Body)	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • Approximate weight 12 oz. • Available with or without pin, roller, nut and bolt.

	2018S Triangle Link Military/Parachute 1979AS615	• Hot Forged 15-5 PH Steel • Thermal Treated • 100% Proof Load Tested @ 2500 lbs • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195
	2019S Adapter Parachute Harness Adjusting Strap Military/Parachute 1979AS611	• Hot Forged 15-5 PH Steel • Thermal Treated • 100% Proof Load Tested @ 1,000 lbs • 100% Side Load Tested @ 1,000 lbs • Approximate weight 1.5 ounces • Meets or exceeds PIA-H-7195
	2020 Carabiner Auto Locking Twist Lock Mechanism Fall Arrest/Safety 2020-1	• Formed Alloy Steel • 100% Proof Load Tested @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 3.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2023 Adjuster Pass Buckle, Female Fall Arrest/Safety 2023-1 2023-1G Engineered to mate with 2024	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 3.2 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2024 Adjuster Pass Buckle, Male Fall Arrest/Safety 2024-1 2024-1G Engineered to mate with 2023	• Stamped Alloy Steel • Thermal Treated • Minimum Tensile Strength 4000 lbs. • Approximate weight 3.2 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01

	2025 D-Ring Rescue Ring Assy, Snaplink Military/Parachute 1979AS975-1 NSN1670-01-457-6899	• Hot Forged 17-4 PH Stainless Steel • Thermal Treated • 100% Proof Load Tested @ 2300 lbs. • Approximate weight 4.0 ounces • Meets or exceeds PIA-H-7195
	2026-1G Double Slotted D-Ring Fall Arrest/Safety	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 5,000 lbs • 100% Side Load Tested @ lbs • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2027-11 Single Twist Lock Carabiner Safety/Fall Arrest	• Hot Forged Alloy Steel • Thermal Treated • Minimum Ultimate Strength 5,000 lbs • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2029-1 Bent D-Ring Military/Parachute 11-1-3538	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 5,000 lbs • Meets or exceeds PIA-H-7195
	2030-1 Link Racing	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • Meets or exceeds SFI.16.1 • NASCAR Approval Pending

	2031 Replaceable Bar D-Ring Military/Parachute 11-1-4232	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated Iridescent Bronze • Meets or exceeds PIA-H-7195
	2032 O-Ring 1.671" O.D. - 1.296" I.D. Military/Parachute 11-1-3539	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 600 lbs • Also available in Hot Forged 17-4 PH Stainless Steel with high luster finish • Meets or exceeds PIA-H-7195
	2033 V-Ring Military/Parachute 54A90B2	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • Approximate weight 1.6 oz. • Meets or exceeds PIA-H-7195
	2034-ST Snap Hook Fall Arrest/Safety	• Stamped High Carbon or Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 5,000 lbs
	2035 O-Ring, No. 3 1.255" O.D. - .870 I.D. Military/Parachute 11-1-3540	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 600 lbs • Meets or exceeds PIA-H-7195

	2036 Sling Ring Military/Cargo	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 20,000 lbs • Meets or exceeds PIA-H-7195
	2045 D-Ring Cargo Military/Parachute	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 10,000 lbs • Approximate weight 6 oz. • Meets or exceeds PIA-H-7195
	2046 Buckle Cargo/Military (4037)	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • Ultimate Load 57,000 lbs. • Meets or exceeds PIA-H-7195
	2047 Link, Parachute Separable Connector Military/Parachute (6032)	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 15,000 lbs • Meets or exceeds PIA-H-7195
	2048 O-Ring 4.125" O.D. - 3.0" I.D. Cargo/Military	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • Ultimate Load 40,000 lbs • Meets or exceeds PIA-H-7195
	2049 D-Ring, Bent Parachute	• Hot Forged Alloy Steel • Thermal Treated • Electroless Nickel or Cad Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds PIA-H-7195

	2050 V-Ring Parachute Extraction Bag, Aerial Delivery Military PS70115 MS70115	• Hot Forged Carbon Steel • Cad Plated • Meets or exceeds PIA-H-7195
	2051 Link Quick Release Military/Parachute PS70116 MS70116	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • 100% Side Load Tested @ 1,000 lbs • Meets or exceeds PIA-H-7195
	2052-1 Adapter Parachute Harness Adjusting Strap Military/Parachute PS22014-1 MS22014-1	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 1,000 lbs • 100% Side Load Tested @ 1,000 lbs • Meets or exceeds PIA-H-7195
	2054 Link Quick Release Military/Parachute 11-1-183	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • 100% Side Load Tested @ 1,000 lbs • Meets or exceeds PIA-H-7195
	2055 V-Ring, Quick Fit, Parachute Harness Military/Parachute PS70113 MS70113	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • 100% Side Load Tested @ 1,000 lbs • Meets or exceeds PIA-H-7195

	2056-1G Spreader Hook Cargo/Commercial Fall Arrest/Safety	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 3,600 lbs. • Approximate weight 17 oz.
	2057-1 Clevis Suspension, Air Delivery Military/Parachute PS70087-1 MS70087-1	• Hot Forged Alloy Steel • Thermal Treated • Immersion Zinc Flake/Chromate Finish • Meets or exceeds MIL-C-40137
	2058 O-Ring 2.25" O.D. - 1.75" I.D. Parachute	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds PIA-H-7195
	2059 O-Ring 2.203" O.D.- 1.500" I.D. Parachute	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 7,500 lbs • Meets or exceeds PIA-H-7195

Picture Available Soon	2060 Snap Hook, Parachute Harness Military/Parachute 48B7884	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds PIA-H-7195
	2061 Shackle Tie Down Military/Cargo 12342354	• Hot Forged Alloy Steel • Thermal Treated • Ultimate Load minimum 22,000 lbs. • Black Painted Finish
	2063 Shackle Sling Assembly Military/Cargo 38850-00004-045	• Hot Forged Aluminum Alloy • Thermal Treated • Anodized per MIL-A-8625 Type 1 Class 1 • 10,000 lb. Working Load Limit
	2064 Anchor Shackle Military/Cargo 12381884	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 24,400 lb. Working Load Limit

	2065 Parachute Knife Military/Parachute 823AS101-1	• Blade - 440C Stainless Steel • Handle - Orange PVC • Blade Shield - Clear Vinyl
Picture Available Soon	2067 Anchor Shackle Military/Cargo NSN 4030-00-278-0699	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 13,800 lb. Working Load Limit
	2068 O-Ring, No. 4 .810 " O.D. - .540" I.D. Military/Parachute 11-1-3541	• Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 600 lbs • Meets or exceeds PIA-H-7195
	2069 Snap Hook Fall Arrest/Safety Military/Parachute Cargo 22042-HD (3071)	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 5,000 lbs • Ultimate Load 9,000 lbs. • Meets or exceeds PIA-H-7195

	2071 Link Fastener Military/Parachute 62C125A-2 (L+R, L shown) 63C4010	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 3,000 lbs • Meets or exceeds PIA-H-7195
	2072 Hook, Reverse Parachute Snap Military/Parachute Dimensionally the same as PS22042 with welded back plate. 1/8" holes, 5 on each side of back plate.	• Hot Forged Alloy Steel • Thermal Treated • Cad, Zinc, Electroless Nickel or Chromate finish • 100% Proof Load Tested @ 5,000 lbs • Minimum Tensile Strength 5000 lbs • Approximate weight 6 ounces • Meets or exceeds PIA-H-7195
	2073 O-Ring 1.375" O.D. - .875" I.D. Military/Parachute 66 B 1717	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds PIA-H-7195
	2074 Knife Release, Cargo Platform Military/Parachute PS27761 MS27761	• Hot Forged Alloy Steel • Thermal Treated • Finish - Phosphate Coating, Waxed • Meets or exceeds PIA-H-7195
	2075 Connector, Adjustable Military/Parachute 60D562	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 3,000 lbs • Meets or exceeds PIA-H-7195

	2076 D-Ring, Gunners Military/Parachute 62A129C-2	• Hot Forged Alloy Steel • Thermal Treated • Cad Plated • 100% Proof Load Tested @ 2,500 lbs • Meets or exceeds PIA-H-7195
	2077 Buckle Cargo (4036)	• Hot Forged Alloy Steel • Thermal Treated • Zinc Plated • 100% Proof Load Tested @ 10,000 lbs
	2078 Clevis and Pin Cargo/Military 2078-1 11-1-1631	• Hot Forged Alloy Steel • Thermal Treated • Zinc finish, yellow
Picture Available Soon	2079 Link, 1-3/4" Triangle Hoist Cargo 2079-1S	• Hot Forged Alloy Steel • Thermal Treated • Zinc plated • 100% Proof Load Tested @ 24,000 lbs. • Meets or exceeds PIA-H-7195 and ANSI Z-359.2
	2080 Link, 2" Triangle Hoist Cargo 2080-1S	• Hot Forged Alloy Steel • Thermal Treated • Zinc plated • 100% Proof Load Tested @ 24,000 lbs • Approximate weight 11.0 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2

Picture Available Soon	2081 Link, 3" Triangle Hoist Cargo 2081-1S	• Hot Forged Alloy Steel • Thermal Treated • Zinc plated • 100% Proof Load Tested @ 24,000 lbs. • Approximate weight 14.0 ounces • Meets or exceeds PIA-H-7195 and ANSI Z-359.2
	2085 Basic Lift Ring Cargo/Military 2085-1S 7115446	• Hot Forged 17-4PH Stainless Steel • Thermal Treated • 100% Proof Load Tested @ 5,000 lbs
Picture Available Soon	2086 Adjuster Link, 2"	• Stamped Sheet Metal Alloy • Thermal Treated • Black Phosphate Coating
	2088 Hook, Snap, Parachute Static Line Military/Parachute 11-1-6991 Assembly	• Hot Forged Alloy Steel • Thermal Treated • Cad plated • 100% Proof Load Tested @ 1750 lbs • Minimum Tensile Strength 8000 lbs • Approximate weight 9.0 ounces • Meets or exceeds PIA-H-7195 • Meets SAE-AMS-F-7190

Picture Available Soon	2090 Clevis, Tie Down, Type II Air Delivery Military/Cargo 2090-1 MS70085-1	• Hot Forged Alloy Steel • Thermal Treated • Immersion Zinc Flake finish • 100% Proof Load Tested @ 7,000 lbs • Approximate weight 10.5 ounces • Meets or exceeds PIA-H-7195
Picture Available Soon	2091 Hook, Snap, with 1-3/4" Strap Bar Military/Parachute 2091-1	• Hot Forged Alloy Steel • Thermal Treated • Chromate finish • 100% Proof Load Tested @ 20,000 lbs • Approximate weight 1 lb. 8 ounces
	2101A Carabiner Auto Locking Twist Lock Mechanism Fall Arrest/Safety 2101-A	• Formed Aluminum Alloy • 100% Proof Load Tested @3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 2.7 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01
	2102SS Carabiner Auto Locking Twist Lock Mechanism Fall Arrest/Safety 2102-SS	• Hot Forged Stainless Steel • 100% Proof Loaded @ 3600 lbs. • Minimum Tensile Strength 5000 lbs. • Approximate weight 3.0 ounces • Meets or exceeds ANSI Z-359.2 and CSA Z-259.12-01



HARDWARE

Part #	Description	Packaging Quantity	Weight Gr
1201	STRAIGHT SHACKLE D 4 STANDARD	10	7,2
1202	STRAIGHT SHACKLE D 5 STANDARD	10	13,2
1203	STRAIGHT SHACKLE D 6 STANDARD	10	22,6
1204	STRAIGHT SHACKLE D 8 STANDARD	10	55,2
1205	STRAIGHT SHACKLE D 10 STANDARD	5	98
1206	STRAIGHT SHACKLE D 12 STANDARD	5	193
1207	STANDARD SHACKLE "D" - 14 DIA	1	312
1211	LONG SHACKLE D 4 STANDARD	10	8,6
1212	LONG SHACKLE D 5 STANDARD	10	17
1213	LONG SHACKLE D 6 STANDARD	10	27
1214	LONG SHACKLE D 8 STANDARD	10	66
1215	LONG SHACKLE D 10 STANDARD	5	128,4
1222	TWIST SHACKLE D 5 STANDARD	10	16,8
1223	TWIST SHACKLE D 6 STANDARD	10	27,4
1224	TWIST SHACKLE D 8 STANDARD	10	67,2
1225	TWIST SHACKLE D 10 STANDARD	5	127
1233	TACK SHACKLE DIA 6 MM	10	48
1234	TACK SHACKLE DIA 8 MM	10	110
1241	BOW SHACKLE D 4 STANDARD	10	9,4
1242	BOW SHACKLE D 5 STANDARD	10	17,6
1243	BOW SHACKLE D 6 STANDARD	10	30
1244	BOW SHACKLE D 8 STANDARD	10	68,8
1245	BOW SHACKLE D 10 STANDARD	5	137,6
1246	BOW SHACKLE D 12 STANDARD	5	233,2
1247	STANDARD SHACKLE-BOW-16 DIA	1	540
1248	STANDARD SHACKLE-BOW-20 DIA	1	1056
1262	LARGE SHACKLE D 5 STANDARD	10	25,8
1263	LARGE SHACKLE D 6 STANDARD	10	41,6
1264	LARGE SHACKLE D 8 STANDARD	5	99,6
1265	LARGE SHACKLE D 10 STANDARD	5	184
1303	D-ALLEN KEY PIN SHACKLE DIA.6	10	21,6
1304	D-ALLEN KEY PIN SHACKLE DIA.8	10	53,4
1305	D-ALLEN KEY PIN SHACKLE DIA.10	5	99,2
1306	D-ALLEN KEY PIN SHACKLE DIA.12	5	187
1343	BOW ALLEN KEY P.SHACKLE DIA.6	10	29,4
1344	BOW ALLEN KEY P. SHACKLE DIA.8	10	67,2
1345	BOW ALLEN KEY P.SHACKLE DIA.10	5	133,2
1346	BOW ALLEN KEY P.SHACKLE DIA.12	5	222,4
1363	ALLEN KEY PIN SHACKLE/LARGE 6	5	43,6

Part #	Description	Packaging Quantity	Weight Gr
1394	THIMBLE SHACKLE D 8 (ALLEN P.)	5	76,4
1395	THIMBLE SHACKLE D 10(ALLEN P.)	5	142,4
1401	STRAIGHT SHACKLE D 4 CAPTIVE	10	9
1402	STRAIGHT SHACKLE D 5 CAPTIVE	10	16,2
1403	STRAIGHT SHACKLE D 6 CAPTIVE	10	28
1404	STRAIGHT SHACKLE D 8 CAPTIVE	10	61,6
1405	STRAIGHT SHACKLE D 10 CAPTIVE	5	114
1406	STRAIGHT SHACKLE D 12 CAPTIVE	5	188,8
1411	LONG SHACKLE D 4 CAPTIVE	10	12,4
1412	LONG SHACKLE D 5 CAPTIVE	10	24
1413	LONG SHACKLE D 6 CAPTIVE	10	40
1414	LONG SHACKLE D 8 CAPTIVE	10	92,6
1415	LONG SHACKLE D 10 CAPTIVE	5	176
1422	TWIST SHACKLE D 5 CAPTIVE	10	23
1423	TWIST SHACKLE D 6 CAPTIVE	10	39,8
1424	TWIST SHACKLE D 8 CAPTIVE	10	90,6
1425	TWIST SHACKLE D 10 CAPTIVE	5	170,8
1432	KEY PIN SHACKLE D 5	10	31,2
1433	KEY PIN SHACKLE D 6	10	48,6
1434	KEY PIN SHACKLE D 8	10	121,6
1441	BOW SHACKLE D 4 CAPTIVE	10	10,2
1442	BOW SHACKLE D 5 CAPTIVE	10	19,6
1443	BOW SHACKLE D 6 CAPTIVE	10	33
1444	BOW SHACKLE D 8 CAPTIVE	10	75,4
1445	BOW SHACKLE D 10 CAPTIVE	5	139
1494	THIMBLE SHACKLE D.8 (CAPTIVE)	5	78
1495	THIMBLE SHACKLE D 10 (CAPTIVE)	5	146,8
2271	FIXED FORK SNAP SHACKLE L.50	5	53,6
2272	FIXED FORK SNAP SHACKLE L.70	5	130
2284	WEB SNAP HOOK 30 MM L60	10	34,6
2313	CARBINE HOOK 60 "STANDARD"	10	30,4
2315	CARBINE HOOK 80 "STANDARD"	10	72,4
2316	CARBINE HOOK 100 "STANDARD"	10	131,2
2317	CARBINE HOOK 120 "STANDARD"	5	228,8
2323	CARBINE HOOK 60 "ASYMMETRIC"	10	31,4
2325	CARBINE HOOK 80 "ASYMMETRIC"	10	74,6
2326	CARBINE HOOK 100 "ASYMMETRIC"	10	136
2327	CARBINE HOOK 120 "ASYMMETRIC"	5	235,6
2328	CARBINE HOOK-ASYM.-LARGE-L.170	5	335,6
2329	MOORING HOOK - AUTOMATIC	1	382
2333	CARBINE HOOK 60 WITHOUT EYE	10	28,6
2335	CARBINE HOOK 80 WITHOUT EYE	10	68,2
2336	10 MM DIA EYELESS CARBINE HOOK	10	123,8
2337	CARBINE HOOK 120 WITHOUT EYE	5	211,6
2345	DELTA HOOK DIA 8	10	76
2346	DELTA HOOK DIA 10	10	142
2363	ALLEN KEY PIN SWIVEL L 80	5	99,6
2364	ALLEN KEY PIN SWIVEL L 70	5	84,8
2365	ALLEN KEY PIN SWIVEL L 105	2	265
2367	WEB SWIVEL L 60	5	58
2368	WEB SWIVEL L 80	2	110
2369	ALLEN KEY PIN SWIVEL L 120	2	312
2373	SNAP SHACKLE 80 MM/LARGE BAIL	2	70
2374	WEB SNAP SHACKLE L 80	5	82

Part #	Description	Packaging Quantity	Weight Gr
2375	SNAP SHACKLE 105 LARGE BAIL	2	160,4
2376	WEB SNAP SHACKLE L 100	2	176
2377	SNAP SHACKLE 140 LARGE BAIL	2	398
2381	SAFETY SNAP HOOK 75	10	64
2382	SAFETY SNAP HOOK 100	5	167,2
2384	SWIVEL SNAP HOOK 70MM	5	36
2385	SWIVEL SNAP HOOK 100MM	5	102,4
2442	MOORING SWIVEL L 130 MM	2	282
2443	MOORING SWIVEL L 150 MM	2	420
2452	DOUBLE ACTION SAFETY HOOK	1	126
2454	DOUBLE ACTION SAFETY HOOK (Y)	1	126
2455	DOUBLE ACTION SAFETY HOOK (B)	1	126
2461	SWIVEL SHACKLE 45 (CLEVIS P.)	5	26,4
2462	SWIVEL-SHACKLE 60MM/CLEVIS PIN	5	52
2463	SWIVEL-SHACKLE 80 SELF LOCKING	5	102,8
2464	SWIVEL-SHACKLE 70 SHACKLE	5	87,2
2465	SWIVEL-SHACKLE 105 SHACKLE	2	280
2466	SWIVEL SHACKLE 125 LARGE BAIL	2	368
2467	SWIVEL-SHACKLE 80 LARGE BAIL	2	95,6
2468	SWIVEL-SHACKLE 115 LARGE BAIL	2	263
2469	SWIVEL-SHACKLE 120SELF LOCKING	2	322
2470	SNAP SHACKLE 35 FIXED EYE	5	12
2471	SNAP SHACKLE 50 FIXED EYE	5	42
2472	SNAP SHACKLE 70 FIXED EYE	5	90
2473	SNAP SHACKLE 70 SWIVEL EYE	5	65,2
2474	SNAP SHACKLE 70 SHACKLE	2	70,8
2475	SNAP SHACKLE 90 SWIVEL EYE	5	136
2476	SNAP SHACKLE 90 SHACKLE	2	154
2477	SNAP SHACKLE 120 SWIVEL EYE	2	353
2478	SNAP SHACKLE 120 SHACKLE	2	417
2480	SNAP HOOK 50	10	22,6
2481	SNAP HOOK 75	10	66,8
2482	SNAP HOOK 100	5	185,6
2483	KNOCK ON SAIL SNAP 55	10	36,8
2486	KNOCK ON SAIL SNAP 50	10	22,25
2487	KNOCK ON SAIL SNAP 65	10	59,2
2488	KNOCK ON SAIL SNAP 90	5	143
2489	KNOCK ON SAIL SNAP 80	10	99,8
2490	KNOCK ON SAIL SNAP 110	1	244
2493	SNAP SHACKLE/THIMBLE SWIV.95	5	76,1
2495	SNAP SHACKLE/THIMBLE SWIV.110	5	150,3
2575	TACK RELEASE SNAP SHACKLE L 70	5	100
2650	SPEEDLINK: trigger snap shackle L74	2	52
2653	TRIGGER SNAP SHACKLE - L 85	2	102
2655	TRIGGER SNAP SHAKLE L.105	2	180
2657	TRIGGER SNAP SHACKLE L.125	1	344
2673	WICHARD SNAP SHACKLE 70	5	59,2
2674	WICHARD SNAP SHACKLE 80	5	88,4
2675	WICHARD SNAP SHACKLE 90	5	136
2676	WICHARD SNAP SHACKLE 110	2	233
2677	WICHARD SNAP SHACKLE 130	2	371
2678	WICHARD SNAP SHACKLE 150	1	548
2753	TRIGGER SNAP SHACKLE L 100	2	124
2755	TRIGGER SNAP SHACKLE L.115	2	218

Part #	Description	Packaging Quantity	Weight Gr
2757	TRIGGER SNAP SHACKLE L.140	1	380
2773	WICHARD SNAP SHACKLE 80 LARGE	2	64
2774	WICHARD SNAP SHACKLE 90 LARGE	2	100
2775	WICHARD SNAP SHACKLE 110 LARGE	2	160,4
2776	WICHARD SNAP SHACKLE 120 LARGE	2	271
2777	WICHARD SNAP SHACKLE 145 LARGE	2	396
2778	WICHARD SNAP SHACKLE 160 LARGE	1	618
2831	PELICAN HOOK L 100 M 8X125	5	106
2833	LIFE LINE HOOK L.95 - M8	5	82
2855	TRIGGER SNAP SHACKLE L.105	2	184
2857	TRIGGER SNAP SHACKLE L.125	1	390
2984	CHAIN GRIP FOR CHAIN DIA 8MM	10	84
2985	CHAIN GRIP FOR CHAIN DIA 10MM	5	166
2986	CHAIN GRIP FOR CHAIN DIA 12MM	5	314
4107	SAIL CHAFE PROTECTOR DIA 70MM	2	36,5
5526	BACKSTAY ADJUSTER WITH WHEEL	1	1128
5536	BACKSTAY ADJUSTER-HANDLE	1	1306
5546	PELICAN ADJUSTER WITH WHEEL	1	1090
5554	BABYSTAY ADJUSTER(PIN 8 MM)	1	802
5556	PELICAN ADJUSTER-HANDLE	1	1268
5565	BACKSTAY ADJUSTER(RATCHET H.)	1	2052
5566	BABYSTAY ADJUSTER (LONG ADJ.)	1	1390
5567	RATCHET BACKSTAY ADJUSTER	1	2088
5568	RATCHET BACKSTAY ADJUSTER D.16	1	3264
5585	BABYSTAY ADJUSTER(RATCHET H.)	1	1848
5587	RATCHET PELICAN ADJUSTER	1	1856
5588	RATCHET PELICAN ADJUSTER D.16	1	2862
6333	EYE NUT 6M 6 X 100	10	22
6334	EYE NUT 6M 8 X 125	10	20,4
6344	EYE NUT 8M 8 X 125	10	51,4
6345	EYE NUT 8M10 X 150	10	49,2
6355	EYE NUT 10M10 X 150	5	99,2
6356	EYE NUT 10M12 X 175	5	95,2
6366	EYE NUT 12M12 X 175	5	165
6367	EYE NUT 12M14 X 200	5	161,6
6368	EYE NUT 12M16 X 200	5	162
6435	EYE HOOK - 10 X 450	1	254
6490	EYE BOLT 6 X 40	10	24
6491	EYE BOLT 6 X 60	10	27,39
6492	EYE BOLT 8 X 80	10	56,4
6493	EYE BOLT 8 X 100	10	60,6
6495	EYE BOLT 10 X 100	5	98
6497	EYE BOLT 12 X 120	5	163,2
6504	FOLDING PADEYE DIA.6	1	62
6505	FOLDING PADEYE DIA.8	1	136
6506	FOLDING PADEYE DIA.10	1	286
6511	U-BOLT 4 X 50	10	22,2
6512	U-BOLT 5 X 60	10	35,2
6513	U-BOLT 6 X 70	10	60,2
6514	U-BOLT 8 X 80	10	113,8
6515	U-BOLT 10 X 90	5	200,4
6516	U-BOLT 12 X 110	2	319
6523	U-BOLT 6 X 90	10	67,2
6524	U-BOLT 8 X 100	10	126,8

Part #	Description	Packaging Quantity	Weight Gr
6525	U-BOLT 10 X 110	5	222
6526	U-BOLT 12 X 130	2	349
6564	DOUBLE FOLDING PADEYE 6 MM DIA	1	126
6565	DOUBLE FOLDING PADEYE DIA.8MM	1	232
6566	DOUBLE FOLDING PADEYE DIA.10	1	494
6584	UNIVERSAL FOLDING PADEYE 6 DIA	1	56
6711	"D" RING 6MM L 40	10	29,4
6712	"D" RING 6 MM L 50	10	35,8
6721	"D" RING 5 MM L 30	10	19
6731	TRIANGLE LINK 4MM L 30	10	10,6
6732	TRIANGLE LINK 6 MM L 50	10	37,2
6751	TRIANGLE WITH BAR 6MM L 45	10	58,8
6771	DOUBLE ADJUSTER 4 MM L 42	10	51,6
6772	ADJUSTER 5-8 MM L 45	10	78,4
6782	RING 5 X 21,5	10	14,2
6783	RING 5 X 33	10	18
6784	RING 7,3 X 45	10	57,6
7001	ELASTIC SAFETY TETHER/2080 KG	1	390
7002	SAFETY HARNESS TETHER/3 HOOKS	1	612
7005	ELASTIC HARNESS TETHER (2 S.H)	1	398
7006	HARNESS TETHER(3 DOUBLE S.H.)	1	582
7007	ELAST. ORC TETHER/1 SNAP SHAC.-	1	352
7008	ORC TETHER/1 SNAP SHACKLE/	1	518
7011	STANDARD SAFETY TETHER/2080 KG	1	406
7015	HARNESS TETHER(2 DOUBLE S.H.)	1	392
7016	STD SAFETY TETHER 2 M	1	210
7051	Lyf Safe: jacklines kit L: 8.50m	1	1,607
7052	Lyf Safe: jacklines kit L: 11m	1	1,915
7053	Lyf Safe: jacklines kit L: 14m	1	2,266
7101	TRAPEZE HOOK	1	450
7150	GYB EASY	1	0
7201	WIND INDICATOR L 38	1	228
7202	WIND INDICATOR L 25	1	90
7304	S.S.WIRE GRIPS D.2-3-4	10	9,4
7306	S.S.WIRE GRIPS D.4-5-6	10	20
7308	S.S.WIRE GRIPS D.6-7-8	6	39
7310	S.S.WIRE GRIPS D.8-10	6	82,6
7312	S.S.STEEL WIRE GRIPS D.10-12	4	101,9
7485	PRE-FEEDER	1	52
7500	RETAINING CLIP DIA 20	1	15,5
7501	RETAINING CLIP (TUBE DIA.30)	1	0
7502	REPLACEMENT BALL JOINT	1	28
7503	REPLACEMENT UNIVERSAL JOINT	1	20
7505	SPARE ARTICULATION FOR # 7550 7555	1	146
7506	SPARE ARTICULATION FOR # 7551 7556	1	0
7507	SPARE ARTICULATION # 7550/51/55/56	1	0
7510	TILLER EXTENSION L.70 CM	1	238,3
7515	TILLER EXTENSION 70 (U-JOINT)	1	198,4
7520	TILLER EXTENSION L. 90 CM	1	286,3
7525	TILLER EXTENSION 95 (U-JOINT)	1	244,5
7540	FIXED TILLER EXTENSION L.58 CM	1	378
7541	FIXED TILLER EXTENSION L.70 CM	1	406
7550	TELESCOPIC TILLER EXTENSION	1	628
7551	TELESCOPIC TILLER EXTENSION	1	716

Part #	Description	Packaging Quantity	Weight Gr
7555	TELESCOPIC TILLER EXTENSION	1	708
7556	TELESCOPIC TILLER EXTENSION	1	800
7802	SWAGE STUD FOR WIRE DIA. 4	5	35,6
7803	SWAGE STUD FOR WIRE DIA. 5	5	42
7804	SWAGE STUD FOR WIRE DIA. 6	5	56,4
7901	FASTENING SYSTEM-FIXED EYE	1	24
7902	FASTENING SYSTEM-FIXED HEAD	1	52
7906	FASTENING SYSTEM-SWIVEL W/CLEV	1	70
7910	FASTENING SYSTEM-SNAP SHACKLE	1	0
7911	FASTENING SYSTEM-SNAP SHACKLE	1	130
7912	FASTENING SYSTEM-SNAP SHACKLE	1	0
7915	FASTENING SYSTEM-WEBBING 17CM	1	24
7916	FASTENING SYSTEM-WEBBING 17CM	1	30
7920	FASTENING SYSTEM-WEBBING 25CM	1	28
7921	FASTENING SYSTEM-WEBBING 25CM	1	34
9150	BACKSTAY TANG	1	306
9201	FAIRLEAD DIA. 4	10	5,4
9202	FAIRLEAD DIA. 5	10	9,8
9203	FAIRLEAD DIA. 6	10	16,8
9204	FAIRLEAD DIA. 8	10	39,4
9205	EYE STRAP - 10 DIA	1	78
9211	WEBBING EYE STRAP - 4 DIA.	10	6,8
9212	WEBBING EYE STRAP - 5 DIA	10	13,6
9222	WEB EYE STRAP DIA.5 (40 MM)	10	20
9301	W-LANYARD	5	2
9304	KEY-RING SHACKLE	10	17
9305	KEY-RING SNAP HOOK	10	29
9306	KEY-RING SNAP SHACKLE	10	19
9307	KEY RING - BLOCK	10	19
9412	REEFING EYE STRAP - 5 DIA	10	19
9601	WICHINOX	6	214
10005	RIGGER SHEATH	1	216
10006	CREWMAN KNIFE L 20	1	94
10007	CREWMAN KNIFE L 26	1	164
10009	FLOATING KNIFE L 19	1	96
10022	CORDURA KNIFE SHEATH - BLACK	1	24
10023	LEATHER SHEATH	1	44
10031	ONE HAND KNIFE - EMERALD	1	120
10032	ONE HAND KNIFE - FLUORESCENT	1	120
10033	ONE HAND KNIFE - BLACK	1	120
10036	ONE HAND KNIFE - EMERALD	1	120
10041	SINGLE BLADE KNIFE - GREEN	1	74
10042	SINGLE BLADE KNIFE - FLUO	1	74
10043	SINGLE BLADE KNIFE - BLACK	1	74
10046	SINGLE BLADE KNIFE - BLUE	1	74
10049	SAFETY BLADE ORANGE KNIFE	1	74
10051	SHACKLER KNIFE - GREEN	1	90
10052	SHACKLER KNIFE - FLUO	1	96
10053	SHACKLER KNIFE - BLACK	1	90
10055	SHACKLER KNIFE/SOFT GREY HAND.	1	92
10056	SHACKLER KNIFE - GREEN	1	90
10061	RIGGING KNIFE - GREEN (3 PCES)	1	132
10062	RIGGING KNIFE - FLUO (3 PCES)	1	132
10063	RIGGING KNIFE - BLACK (3 PCES)	1	132

Part #	Description	Packaging Quantity	Weight Gr
10066	RIGGING KNIFE - BLUE (3 PCES)	1	132
10082	S.S. KNIFE - BLADE, SHACKLER	1	154
10083	TITANIUM KNIFE - FORGED HANDLE	1	232
10084	S.S.KNIFE - BLADE, SHACKLER,	1	154
10302	RELEASE FID D 18 x 150 MM	1	73
10303	SHACKLER	10	33
10304	SHACKLER/SPIKE TOOL	5	109
11203	"HR" D-SHACKLE 6 MM DIA	1	24
11204	STRAIGHT SHACKLE D 8 HR	1	52
11205	STRAIGHT SHACKLE D 10 HR	1	102
11206	STRAIGHT SHACKLE D 12 HR	1	192
11207	STRAIGHT SHACKLE D 14 HR	1	304
11208	STANDARD D-SHACKLE D.16/H.R.	1	464
11209	STANDARD D-SHACKLE D.20/H.R.	1	860
11215	LONG SHACKLE D 10 HR	1	164
11240	STANDARD BOW SHACKLE D.14/H.R.	1	364
11244	BOW SHACKLE D 8 HR	1	68
11245	BOW SHACKLE D 10 HR	1	136
11246	BOW SHACKLE D 12 HR	1	224
11247	BOW SHACKLE D 16 HR	1	526
11248	BOW SHACKLE D 20 HR	1	1011,2
11249	BOW SHACKLE D 24 HR	1	1706
12836	PELICAN HOOK L 170 M12X175	1	558
12837	PELICAN HOOK L 170 M14X200	1	534
16504	H.R.D-RING DIA.6MM	10	0
16505	H.R.D-RING DIA.8MM	10	0
16506	H.R.D-RING DIA.10MM	10	0
16613	H.R.TOERAIL PADEYE/RAIL STAND.	1	186
16614	H.R.TOERAIL PADEYE/RAIL ASYMM.	1	186
16615	H.R.TOERAIL PADEYE/RAIL STAND.	1	280
30006	CAM CLEAT ROPE SIZE D.8 (26MM)	10	17
30012	CAM CLEAT ROPE SIZE DIA.12	10	44,4
30016	CAM CLEAT ROPE SIZE DIA.16	5	68,8
30018	SINGLE BLOCK DIA 18	1	16
30019	SINGLE BLOCK/EYE DIA 19	1	12
30024	S.S.BLOCK DIA 24 - SINGLE/	1	21,3
30025	25 MM DIA STANCHION BLOCK	1	49,3
30026	EYE STRAP (26 MM)	10	2,8
30036	4 MM WIRE S.S.BLOCK (24 DIA)	1	50
30038	EYE STRAP 38 MM	10	9,6
30045	MAST STEP BLOCK	1	76
30050	50 DIA ALUMINIUM BLOCK/WIRE 5	1	84,6
30052	EYE STRAP 52 MM	5	16,4
30070	S.S.BLOCK/ALU.SHEAVE DIA 70 MM	1	222
30071	S.S.BLOCK/ALU.SHEAVE DIA.70	1	298
30101	MAIN SHEET SWIVEL BASE W/BALLS	1	308
30103	SWIVEL CLEAT BASE	1	0
30105	SWIVEL CLEAT BASE	1	178
30118	SINGLE BLOCK/BECKET DIA 18	1	22
30124	S.S.BLOCK DIA 24 - SINGLE /	1	26,6
30125	25 MM DIA STANCHION BLOCK(PIV)	1	70,6
30126	EYE STRAP (26 MM)	5	3
30136	EXIT BLOCK 36 MM DIA	1	168
30138	EYE STRAP 38 MM	5	7

Part #	Description	Packaging Quantity	Weight Gr
30145	MAST STEP BLOCK WITH SWIVEL	1	104
30152	EYE STRAP 52 MM	5	9
30224	S.S.BLOCK DIA 24 - SINGLE /	1	34,6
30225	EXIT BLOCK - FLAT - DIA 25	1	36
30324	S.S.BLOCK DIA 24 - SINGLE /	1	28
30325	EXIT BLOCK - CURVED - DIA 25	1	36
30424	S.S.BLOCK DIA 24 - DOUBLE /	1	30
30425	SWIVEL SHACKLE BLOCK DIA.25	1	36
30524	S.S.BLOCK DIA 24 - DOUBLE /	1	36,6
30624	S.S.BLOCK DIA 24 - DOUBLE /	1	47,3
30724	S.S.BLOCK DIA 24 - TRIPLE /	1	40
30824	S.S.BLOCK DIA 24 - TRIPLE /	1	60,6
30924	S.S.BLOCK DIA 24 - TRIPLE	1	60,6
31024	3 MM WIRE S.S.BLOCK (DIA 24)	1	19,3
31031	S.S.SNATCH BLOCK-DIA.45	1	118
31045	CURVED BLOCK	1	88
31124	SINGLE BLOCK DIA 24	1	14,6
31145	CURVED BLOCK WITH BECKET	1	106
31224	SINGLE BLOCK/BECKET DIA 24	1	20,6
32530	STAND UP SPRING (BLOCK 18/25)	10	4
32540	SPRING WITH COLLAR DIA.25	10	10,8
32550	SPRING WITH COLLAR DIA.35	10	29,6
32570	SWIVEL HEAD CONNECTOR (35/45)	10	19,3
32571	SWIVEL HEAD CONNECTOR (55)	10	22,6
32580	MAST STEP CONNECTOR FOR 33117	10	34,6
32581	MAST STEP ADAPTATOR FOR 34117	10	42
34500	SNATCH BLOCK FOR ROPE 12 MM	1	256
35500	SNATCH BLOCK FOR ROPE 18 MM	1	392
41105	H.R.ROLLER BLOCK DIA.65	1	198
41106	H.R.ROLLER BLOCK DIA.65 SINGLE	1	280
41205	H.R.ROLLER BLOCK DIA.65	1	478
42105	H.R.ROLLER BLOCK DIA.80	1	396
42106	H.R.ROLLER BLOCK DIA.80 SINGLE	1	484
42120	H.R.ROLLER BLOCK DIA.80 SINGLE	1	488
42205	H.R.ROLLER BLOCK DIA.80	1	868
42220	H.R.ROLLER BLOCK DIA.80 DOUBLE	1	728
43105	H.R.ROLLER BLOCK DIA.100	1	692
43106	HR ROLLER BLOCK DIA 100 SINGLE	1	904
43120	HR ROLLER BLOCK DIA.100 SINGLE	1	900
43205	HR ROLLER BLOCK DIA.100	1	0
43220	HR ROLLER BLOCK DIA.100 DOUBLE	1	1386
44105	HR ROLLER BLOCK DIA.125	1	1314
44106	HR ROLLER BLOCK DIA.125 SINGLE	1	1514
44120	HR ROLLER BLOCK DIA.125 SINGLE	1	1464
44220	HR ROLLER BLOCK DIA.125 DOUBLE	1	2240
45105	HR ROLLER BLOCK DIA.160	1	0
45106	HR ROLLER BLOCK DIA.160 SINGLE	1	2768
45120	HR ROLLER BLOCK DIA.160 SINGLE	1	2940
45220	HR ROLLER BLOCK DIA.160 DOUBLE	1	4516
46105	HR ROLLER BLOCK DIA.200	1	4804
46106	HR ROLLER BLOCK DIA.200 SINGLE	1	0
46120	HR ROLLER BLOCK DIA.200 SINGLE	1	0
46220	HR ROLLER BLOCK DIA.200 DOUBLE	1	7572
47105	HR ROLLER BLOCK DIA.240	1	7320

Part #	Description	Packaging Quantity	Weight Gr
47120	HR ROLLER BLOCK DIA.240 SINGLE	1	6994
47220	HR ROLLER BLOCK DIA.240 DOUBLE	1	11000
51203	STRAIGHT SHACKLE D 6 TITANIUM	1	14
51204	STRAIGHT SHACKLE D 8 TITANIUM	1	34
51245	BOW SHACKLE D 10 TITANIUM	1	82
51246	BOW SHACKLE D 12 TITANIUM	1	136
52475	TITANIUM SNAP SHACKLE L 90	1	94
52653	TITANIUM SNAP SHACKLE REF 2653	1	60
52657	TITANIUM SNAP SHACKLE REF 2657	1	200
56504	TITANIUM PADEYE DIA 6	1	40
56505	TITANIUM PADEYE DIA 8	1	80
56506	TITANIUM PADEYE DIA 10	1	174
60081	SHEAVE DIA.18	20	1,5
60082	SHEAVE DIA.25	20	2,9
60083	SHEAVE DIA.35	20	5,4
60084	SHEAVE DIA.45	10	12
60085	SHEAVE DIA.55	10	31,8
60086	SHEAVE DIA.70	5	52
60087	SHEAVE DIA.80	5	60
60113	BLOCK 18/SINGLE FIXED EYE	1	10,8
60114	POUIES 18/SINGLE FIXED EYE	1	14
60120	CHEEK BLOCK DIA 18	1	10
60213	BLOCK 18/DOUBLE FIXED EYE	1	38,4
60214	BLOCK 18/DOUBLE FIXED EYE	1	42,4
60313	BLOCK 18/TRIPLE FIXED EYE	1	52
60314	BLOCK 18/TRIPLE FIXED EYE	1	56
60600	MINI BLOCK - SHEAVE 12 MM	10	11,1
61105	SINGLE BLOCK - SHEAVE 25 -	1	26
61113	BLOCK 25/SINGLE FIXED EYE	1	18
61114	BLOCK 25/SINGLE FIXED EYE	1	23,3
61120	CHEEK BLOCK DIA 25	1	19,3
61121	SINGLE EXIT BLOCK D.25	1	30,6
61213	BLOCK 25/DOUBLE FIXED EYE	1	56
61214	BLOCK 25/DOUBLE FIXED EYE	1	60
61313	BLOCK 25/TRIPLE FIXED EYE	1	77
61314	BLOCK 25/TRIPLE FIXED EYE	1	83
61353	SINGLE BLOCK - SHEAVE 25 -	1	34
62105	BLOCK 35/SINGLE SWIVEL HEAD	1	64
62106	BLOCK 35/SINGLE SWIVEL HEAD	1	72
62108	SINGLE BLOCK/SWIVEL/BECKET AND	1	117,3
62113	BLOCK DIA 35 - SINGLE,	1	50
62117	BLOCK 35/SINGLE FIXED HEAD	1	50
62120	CHEEK BLOCK DIA 35 (W/B)	1	39,3
62121	SINGLE EXIT BLOCK D.35	1	77,3
62122	REEFING BLOCK DIA 35	1	106
62131	SINGLE SWIVEL SNAP HOOK BLOCK	1	76
62205	BLOCK 35/DOUBLE SHACKLE HEAD	1	97
62206	BLOCK 35/DOUBLE SHACKLE HEAD	1	107
62305	BLOCK 35/TRIPLE SWIVEL HEAD	1	131,3
62306	BLOCK 35/TRIPLE SWIVEL HEAD	1	144,6
62308	TRIPLE BLOCK(ADJ.CLEAT/BECKET)	1	193,3
62405	FIDDLE BLOCK - SHEAVE 35 -	1	84
62408	FIDDLE BLOCK - SHEAVE 35 -	1	136
63105	BLOCK 45/SINGLE SWIVEL HEAD	1	103,3

Part #	Description	Packaging Quantity	Weight Gr
63106	BLOCK 45/SINGLE SWIVEL HEAD	1	114
63108	SINGLE BLOCK/SWIVEL/BECKET AND	1	230
63113	BLOCK 45/SINGLE FIXED EYE	1	82
63117	BLOCK 45/SINGLE FIXED HEAD	1	83,3
63118	WEB D-RING BLOCK D.45	1	107,3
63120	CHEEK BLOCK DIA 45	1	70
63205	BLOCK 45/DOUBLE SHACKLE HEAD	1	172,6
63206	BLOCK 45/DOUBLE SHACKLE HEAD	1	192
63305	BLOCK 45/TRIPLE SWIVEL HEAD	1	218,6
63306	BLOCK 45/TRIPLE SWIVEL HEAD	1	233
63308	BLOCK 45/TRIPLE SWIVEL HEAD	1	358
63405	BLOCK 45/FIDDLE SWIVEL HEAD	1	142
63406	BLOCK 45/FIDDLE SWIVEL HEAD	1	155,3
63407	BLOCK 45/FIDDLE SWIVEL HEAD	1	252
63408	BLOCK 45/FIDDLE SWIVEL HEAD	1	264,6
63435	BLOCK 45/FIDDLE SWIVEL SNAP	1	174
63438	BLOCK 45/FIDDLE SWIVEL SNAP	1	252,3
64105	BLOCK 55/SINGLE SWIVEL HEAD	1	180,6
64106	BLOCK 55/SINGLE SWIVEL HEAD	1	198
64108	BLOCK 55/SINGLE SWIVEL HEAD	1	313
64109	BLOCK 55/SINGLE SWIVEL WITH	1	162,6
64110	BLOCK 55/SINGLE SWIVEL WITH	1	182
64113	BLOCK 55/SINGLE FIXED EYE	1	153,3
64117	BLOCK 55/SINGLE FIXED HEAD	1	155,3
64118	WEB D-RING BLOCK D.55	1	167,3
64120	CHEEK BLOCK DIA 55	1	118,6
64130	BLOCK 55/SINGLE SWIVEL SNAP	1	196
64205	BLOCK 55/DOUBLE WITH SHACKLE	1	296
64206	BLOCK 55/DOUBLE WITH SHACKLE	1	331,3
64305	BLOCK 55/TRIPLE WITH SWIVEL	1	386
64306	BLOCK 55/TRIPLE WITH SWIVEL	1	410
64308	TRIPLE BLOCK(ADJ.CLEAT/BECKET)	1	552
64405	BLOCK 55/FIDDLE SWIVEL HEAD	1	242,6
64406	BLOCK 55/FIDDLE WITH SWIVEL	1	260
64408	BLOCK 55/FIDDLE WITH SWIVEL	1	366,4
64435	BLOCK 55/FIDDLE SWIVEL SNAP	1	259,3
64438	BLOCK 55/FIDDLE SWIVEL SNAP	1	398,6
65105	BLOCK 70/SINGLE SWIVEL HEAD	1	370,6
65106	BLOCK 70/SINGLE SWIVEL HEAD	1	434
65108	SINGLE BLOCK/SWIVEL/BECKET AND	1	662,6
65109	BLOCK 70/SINGLE SWIVEL WITH	1	350
65117	BLOCK 70/SINGLE FIXED HEAD	1	315,3
65120	CHEEK BLOCK DIA 70	1	204
65130	BLOCK 70/SINGLE SWIVEL SNAP	1	402
65205	BLOCK 70/DOUBLE SHACKLE HEAD	1	556
65206	BLOCK 70/DOUBLE SHACKLE HEAD	1	628
65305	BLOCK 70/TRIPLE WITH SWIVEL	1	780
65306	BLOCK 70/TRIPLE WITH SWIVEL	1	844
65308	BLOCK 70/TRIPLE SWIVEL HEAD	1	1082
65321	WATERTIGHT U-BOLT 5X60 BLACK	10	38
65322	WATERTIGHT U-BOLT 5X60 WHITE	10	0
65331	WATERTIGHT U-BOLT 6 X 70 (B)	10	66,4
65332	WATERTIGHT U-BOLT 6 X 70 (W)	10	66,4
65341	WATERTIGHT U-BOLT 8 X 80 (B)	10	123,2

Part #	Description	Packaging Quantity	Weight Gr
65342	WATERTIGHT U-BOLT 8 X 80 (W)	10	123,2
65351	WATERTIGHT U-BOLT 10 X 90 (B)	5	219,2
65352	WATERTIGHT U-BOLT 10 X 90 (W)	5	219,2
65361	WATERTIGHT U-BOLT 12 X 110 (B)	2	345
65362	WATERTIGHT U-BOLT 12 X 110 (W)	2	347
65405	BLOCK 70/FIDDLE SWIVEL HEAD	1	524
65406	BLOCK 70/FIDDLE WITH SWIVEL	1	567,3
65408	BLOCK 70/FIDDLE WITH SWIVEL	1	806
65431	WATERTIGHT U-BOLT 6 X 90 (B)	10	72,8
65432	WATERTIGHT U-BOLT 6 X 90 (W)	10	68
65435	BLOCK 70/FIDDLE SWIVEL SNAP	1	553,3
65438	BLOCK 70/FIDDLE SWIVEL SNAP	1	834,6
65441	WATERTIGHT U-BOLT 8 X 100 (B)	10	136,2
65442	WATERTIGHT U-BOLT 8 X 100 (W)	10	136
65451	WATERTIGHT U-BOLT 10 X 110 (B)	5	238,8
65452	WATERTIGHT U-BOLT 10 X 110 (W)	5	238,4
65461	WATERTIGHT U-BOLT 12 X 130 (B)	2	375
65462	WATERTIGHT U-BOLT 12 X 130 (W)	2	377
67515	CARBON TILLER EXTENSIONS L. 94	1	210
67525	CARBON TILLER EXTENSIONS L.120	1	240
70113	BLOCK 18/SINGLE FIXED EYE	1	10,5
70114	BLOCK 18/SINGLE FIXED EYE	1	14,5
70120	CHEEK BLOCK DIA 18 (W/B)	1	10
70213	BLOCK 18/DOUBLE FIXED EYE	1	38,5
70214	BLOCK 18/DOUBLE FIXED EYE	1	42,6
70313	BLOCK 18/TRIPLE FIXED EYE	1	52,7
70314	BLOCK 18/TRIPLE FIXED EYE	1	56
71105	SINGLE BLOCK - SHEAVE 25 -	1	26
71113	BLOCK 25/SINGLE FIXED EYE	1	18,2
71114	BLOCK 25/SINGLE FIXED EYE	1	22,9
71120	CHEEK BLOCK DIA 25 (W/B)	1	19,4
71121	SINGLE EXIT BLOCK D.25/B.B.	1	32
71213	BLOCK 25/DOUBLE FIXED EYE	1	55,6
71214	BLOCK 25/DOUBLE FIXED EYE	1	59,7
71313	BLOCK 25/TRIPLE FIXED EYE	1	77,2
71314	BLOCK 25/TRIPLE FIXED EYE	1	82
71353	SINGLE BLOCK - SHEAVE 25 -	1	36
72105	BLOCK 35/SINGLE SWIVEL HEAD	1	64,6
72106	BLOCK 35/SINGLE SWIVEL HEAD	1	65,7
72108	SINGLE BLOCK/SWIVEL/BECKET AND	1	114,5
72113	BLOCK DIA 35 - SINGLE, FIXED	1	50,4
72117	BLOCK 35/SINGLE FIXED HEAD	1	54,1
72120	CHEEK BLOCK DIA 35 (W/B)	1	43
72121	SINGLE EXIT BLOCK D.35/B.B.	1	80
72131	SINGLE SWIVEL SNAP HOOK BLOCK	1	82
72205	BLOCK 35/DOUBLE SHACKLE HEAD	1	97,5
72206	BLOCK 35/DOUBLE SHACKLE HEAD	1	107,5
72305	BLOCK 35/TRIPLE SWIVEL HEAD	1	136,8
72306	BLOCK 36/TRIPLE SWIVEL HEAD	1	145
72308	TRIPLE BLOCK(ADJ.CLEAT/BECKET)	1	202
72326	SPARE FITTING FOR 92326	1	25
72327	SPARE FITTING FOR 92327-28	1	35
72405	BLOCK 35/FIDDLE SWIVEL HEAD	1	92
72408	BLOCK 35/FIDDLE SWIVEL HEAD	1	350

Part #	Description	Packaging Quantity	Weight Gr
72473	SNAP SHACKLE 45 SE M7 X 75	1	42
72475	SNAP SHACKLE 60 SE M9 X 75	1	96
72477	SNAP SHACKLE 80 SE M12 X 100	1	222
72483	BRASS SAIL SNAP L 55	50	36,2
72486	BRASS SAIL SNAP L 50	50	30,9
72487	BRASS SAIL SNAP L 65	50	56
73105	BLOCK 45/SINGLE SWIVEL HEAD	1	104,5
73106	BLOCK 45/SINGLE SWIVEL HEAD	1	117,1
73108	SINGLE BLOCK/SWIVEL/BECKET AND	1	226,3
73113	BLOCK 45/SINGLE FIXED EYE	1	0
73117	BLOCK 45/SINGLE FIXED HEAD	1	93,2
73118	WEB D-RING BLOCK D.45 / B.B.	1	108
73120	CHEEK BLOCK DIA 45 (W/B)	1	76,8
73205	BLOCK 45/DOUBLE SHACKLE HEAD	1	170,5
73206	BLOCK 45/DOUBLE SHACKLE HEAD	1	192,5
73305	BLOCK 45/TRIPLE SWIVEL HEAD	1	227,5
73306	BLOCK 45/TRIPLE SWIVEL HEAD	1	241,5
73308	BLOCK 45/TRIPLE SWIVEL HEAD	1	381,3
73405	BLOCK 45/FIDDLE SWIVEL HEAD	1	140,8
73406	BLOCK 45/FIDDLE SWIVEL HEAD	1	152,8
73407	BLOCK 45/FIDDLE SWIVEL HEAD	1	249,7
73408	BLOCK 45/FIDDLE SWIVEL HEAD	1	260,6
73435	BLOCK 45/FIDDLE SWIVEL SNAP	1	174,7
73438	BLOCK 45/FIDDLE SWIVEL SNAP	1	261,9
74105	BLOCK 55/SINGLE SWIVEL HEAD	1	175
74106	BLOCK 55/SINGLE SWIVEL HEAD	1	205
74108	BLOCK 55/SINGLE SWIVEL HEAD	1	312,2
74109	BLOCK 55/SINGLE SWIVEL WITH	1	170
74110	BLOCK 55/SINGLE SWIVEL WITH	1	175
74113	BLOCK 55/SINGLE FIXED EYE	1	150
74117	BLOCK 55/SINGLE FIXED HEAD	1	160
74118	WEB D-RING BLOCK D.55 / B.B.	1	158
74120	CHEEK BLOCK DIA 55 (W/B)	1	130,4
74130	BLOCK 55/SINGLE SWIVEL SNAP	1	200
74205	BLOCK 55/DOUBLE WITH SHACKLE	1	290
74206	BLOCK 55/DOUBLE WITH SHACKLE	1	295
74305	BLOCK 55/TRIPLE WITH SWIVEL	1	395
74306	BLOCK 55/TRIPLE WITH SWIVEL	1	412,5
74308	TRIPLE BLOCK(ADJ.CLEAT/BECKET)	1	540
74405	BLOCK 55/FIDDLE SWIVEL HEAD	1	245
74406	BLOCK 55/FIDDLE WITH SWIVEL	1	260
74408	BLOCK 55/FIDDLE WITH SWIVEL	1	370,3
74435	BLOCK 55/FIDDLE SWIVEL SNAP	1	257,7
74438	BLOCK 55/FIDDLE SWIVEL SNAP	1	348,1
75105	BLOCK 70/SINGLE SWIVEL HEAD	1	368
75106	BLOCK 70/SINGLE SWIVEL HEAD	1	440
75108	SINGLE BLOCK/SWIVEL/BECKET AND	1	662,8
75109	BLOCK 70/SINGLE SWIVEL WITH	1	360
75117	BLOCK 70/SINGLE FIXED HEAD	1	305
75120	CHEEK BLOCK DIA 70 (W/B)	1	227,1
75130	BLOCK 70/SINGLE SWIVEL SNAP	1	400
75205	BLOCK 70/DOUBLE SHACKLE HEAD	1	555
75206	BLOCK 70/DOUBLE SHACKLE HEAD	1	610
75305	BLOCK 70/TRIPLE WITH SWIVEL	1	780


Part #	Description	Packaging Quantity	Weight Gr
75306	BLOCK 70/TRIPLE WITH SWIVEL	1	830
75308	BLOCK 70/TRIPLE SWIVEL HEAD	1	935
75405	BLOCK 70/FIDDLE SWIVEL HEAD	1	540
75406	BLOCK 70/FIDDLE WITH SWIVEL	1	585
75408	BLOCK 70/FIDDLE WITH SWIVEL	1	787,3
75435	BLOCK 70/FIDDLE SWIVEL SNAP	1	549,2
75438	BLOCK 70/FIDDLE SWIVEL SNAP	1	685,4
80083	SHEAVE DIA.35-W/CAPTIVE BALLS	10	0
80084	SHEAVE DIA.45-W/CAPTIVE BALLS	10	20
80085	SHEAVE DIA.55-W/CAPTIVE BALLS	10	0
80086	SHEAVE DIA.70-W/CAPTIVE BALLS	5	0
80088	SHEAVE DIA.32-W/CAPTIVE BALLS	5	0
80089	SHEAVE DIA.42-W/CAPTIVE BALLS	5	0
81432	KEY PIN SHACKLE D 5 BAR	10	31,4
81433	KEY PIN SHACKLE D 6 BAR	10	52,4
81434	KEY PIN SHACKLE D 8 BAR	10	123,8
81512	DECK ORGANIZER D32 / 2 SHEAVES	1	70
81513	DECK ORGANIZER D32 / 3 SHEAVES	1	106
81514	DECK ORGANIZER D32 / 4 SHEAVES	1	140
81522	DECK ORGANIZER D42 / 2 SHEAVES	1	156
81523	DECK ORGANIZER D42 / 3 SHEAVES	1	231
81524	DECK ORGANIZER D42 / 4 SHEAVES	1	305
82464	SWIVEL SHACKLE - 70 (B)	5	92
82465	SWIVEL SHACKLE - 105 (B)	2	289
82467	SWIVEL-SHACKLE 80 LARGE BAIL B	2	96
82468	SWIVEL SHACKLE - 115 (B)	2	268
84101	RATCHET BLOCK DIA.55 SWIVEL HEAD	1	182
84103	RATCHET BLOCK DIA.55 SWIVEL HEAD	1	326
84303	RATCHET BLOCK DIA.55 SWIVEL HEAD	1	594
90105	ROLLER BLOCK DIA.30 DELRIN	1	48
90106	ROLLER BLOCK DIA.30 DELRIN	1	52
91432	HR KEY PIN SHACKLE/BAR DIA.5	10	31,2
91433	HR KEY PIN SHACKLE/BAR DIA.6	10	53,2
91434	HR KEY PIN SHACKLE/BAR DIA.8	10	123
92326	MOORING HOOK 100	1	176
92327	MOORING HOOK 120	1	280
92328	MOORING HOOK DIA.12 - L.170	1	378
93105	ROLLER BLOCK DIA.40 ALU.	1	104
93106	ROLLER BLOCK DIA.40 ALU.	1	100
93120	ROLLER BLOCK DIA.40 ALU.SINGLE	1	106
93205	ROLLER BLOCK DIA.40 ALU	1	128
94105	ROLLER BLOCK DIA.50 ALU	1	138
94106	ROLLER BLOCK DIA.50 ALU	1	124
94108	ROLLER BLOCK DIA.50 ALU	1	0
94120	ROLLER BLOCK DIA.50 ALU SINGLE	1	152
94205	ROLLER BLOCK DIA.50 ALU-DOUBLE	1	210
94206	ROLLER BLOCK DIA.50 ALU-DOUBLE	1	0
94305	ROLLER BLOCK DIA.50 ALU-TRIPLE	1	0
94306	ROLLER BLOCK DIA.50 ALU-TRIPLE	1	0
94307	ROLLER BLOCK DIA.50 ALU-TRIPLE	1	0
94308	ROLLER BLOCK DIA.50 ALU-TRIPLE	1	0
94405	ROLLER BLOCK DIA.50 ALU	1	0
94406	ROLLER BLOCK DIA.50 ALU	1	0
94407	ROLLER BLOCK DIA.50 ALU	1	0

Part #	Description	Packaging Quantity	Weight Gr
94408	ROLLER BLOCK DIA.50 ALU	1	0
95105	ROLLER BLOCK DIA.65 ALU	1	218
95106	ROLLER BLOCK DIA.65 ALU	1	232
95108	ROLLER BLOCK DIA.65 ALU SINGLE	1	338
95120	ROLLER BLOCK DIA.65 ALU-SINGLE	1	200
95205	ROLLER BLOCK DIA.65 ALU	1	278
95206	ROLLER BLOCK DIA.65 ALU-DOUBLE	1	282
95220	ROLLER BLOCK DIA.65 ALU-DOUBLE	1	314
95305	ROLLER BLOCK DIA.65 ALU	1	418
95306	ROLLER BLOCK DIA.65 ALU-TRIPLE	1	422
95307	ROLLER BLOCK DIA.65 ALU-TRIPLE	1	514
95308	ROLLER BLOCK DIA.65 ALU-TRIPLE	1	534
95310	ROLLER BLOCK DIA.65 ALU-FIDDLE	1	466
95405	ROLLER BLOCK DIA.65 ALU	1	268
95406	ROLLER BLOCK DIA.65 ALU-FIDDLE	1	280
95407	ROLLER BLOCK DIA.65 ALU-FIDDLE	1	374
95408	ROLLER BLOCK DIA.65 ALU-FIDDLE	1	382
96105	ROLLER BLOCK DIA.80 ALU	1	280
96106	ROLLER BLOCK DIA.80 ALU-SINGLE	1	294
96120	ROLLER BLOCK DIA.80 ALU-SINGLE	1	268
96205	ROLLER BLOCK DIA.80 ALU	1	374
96220	ROLLER BLOCK DIA.80 ALU-DOUBLE	1	430
100GO	S.S.QUICK LINK/LONG 10 DIA	5	162
120GO	S.S.QUICK LINK/LONG 12 DIA	5	270
140GO	S.S.QUICK LINK/LONG 14 DIA	1	425
160GO	S.S.QUICK LINK/LONG 16 DIA	1	640
180GO	S.S.QUICK LINK/LONG 18 DIA	1	890
30GO	S.S.QUICK LINK/LONG 3 DIA	10	7
40D	S.S.QUICK LINK/DELTA 4 DIA	10	15
40GO	S.S.QUICK LINK/LONG 4 DIA	10	16
40N	S.S.QUICK LINK/STANDARD 4 DIA	10	12
50D	S.S.QUICK LINK/DELTA 5 DIA	10	25
50GO	S.S.QUICK LINK/LONG 5 DIA	10	26
50N	S.S.QUICK LINK/STANDARD 5 DIA	10	21,5
60D	S.S.QUICK LINK/DELTA 6 DIA	10	40
60GO	S.S.QUICK LINK/LONG 6 DIA	10	42,5
60N	S.S.QUICK LINK/STANDARD 6 DIA	10	35,5
70D	S.S. QUICK LINK DELTA 7 DIA	10	59,8
80D	S.S.QUICK LINK/DELTA 8 DIA	10	85
80GO	S.S.QUICK LINK/LONG 8 DIA	10	91,5
80N	S.S.QUICK LINK/STANDARD 8 DIA	10	80
FX11	FORTRESS ANCHOR-BOAT 8 TO 10M	1	3616
FX125	FORTRESS ANCHOR-BOATS OVER 21M	1	33100
FX16	FORTRESS ANCHOR-BOAT 10 TO 12M	1	5250
FX23	FORTRESS ANCHOR-BOAT 12 TO 14M	1	7800
FX37	FORTRESS ANCHOR-BOAT 14 TO 15M	1	11800
FX55	FORTRESS ANCHOR-BOAT 15 TO 18M	1	17200
FX7	FORTRESS ANCHOR - BOAT 8 M	1	2186
FX85	FORTRESS ANCHOR-BOAT 18 TO 21M	1	24000

PARACHUTAGE SPECIFIEK

Part #	Désignation / Description	Dimensions			Emballage / Packaging
		fil / wire	interieur / interior	sangle / webbing	
16781	Anneau HR / <i>HR Ring</i>	dia 3	dia 13		100
16782	Anneau HR / <i>HR Ring</i>	dia 5	dia 21,5		100
16783	Anneau HR / <i>HR Ring</i>	dia 5	dia 33		50
16784	Anneau HR / <i>HR Ring</i>	dia 7,3	dia 45		50
16756	Anneau passant cambré HR / <i>HR bent D-ring</i>		dia 33	45 mm	50
16741	Anneau D HR à barette / <i>HR D-ring with bar</i>	dia 6		45 mm	50
16742	Anneau D HR à barette cambré / <i>HR D-ring with bar bent</i>	dia 6		45 mm	50
16760	Passant à barette type 22040 / <i>Adjuster (22040 type)</i>		25	45 mm	20
16762	Passant à barette autobloquante / <i>Adjuster with self-locking bar (modèle déposé / patented)</i>		28	45 mm	20

16781 / 16782 / 16783 / 16784




16756



16741 / 16742



16760



16762

